


2024

**PRODUCT
DATA**

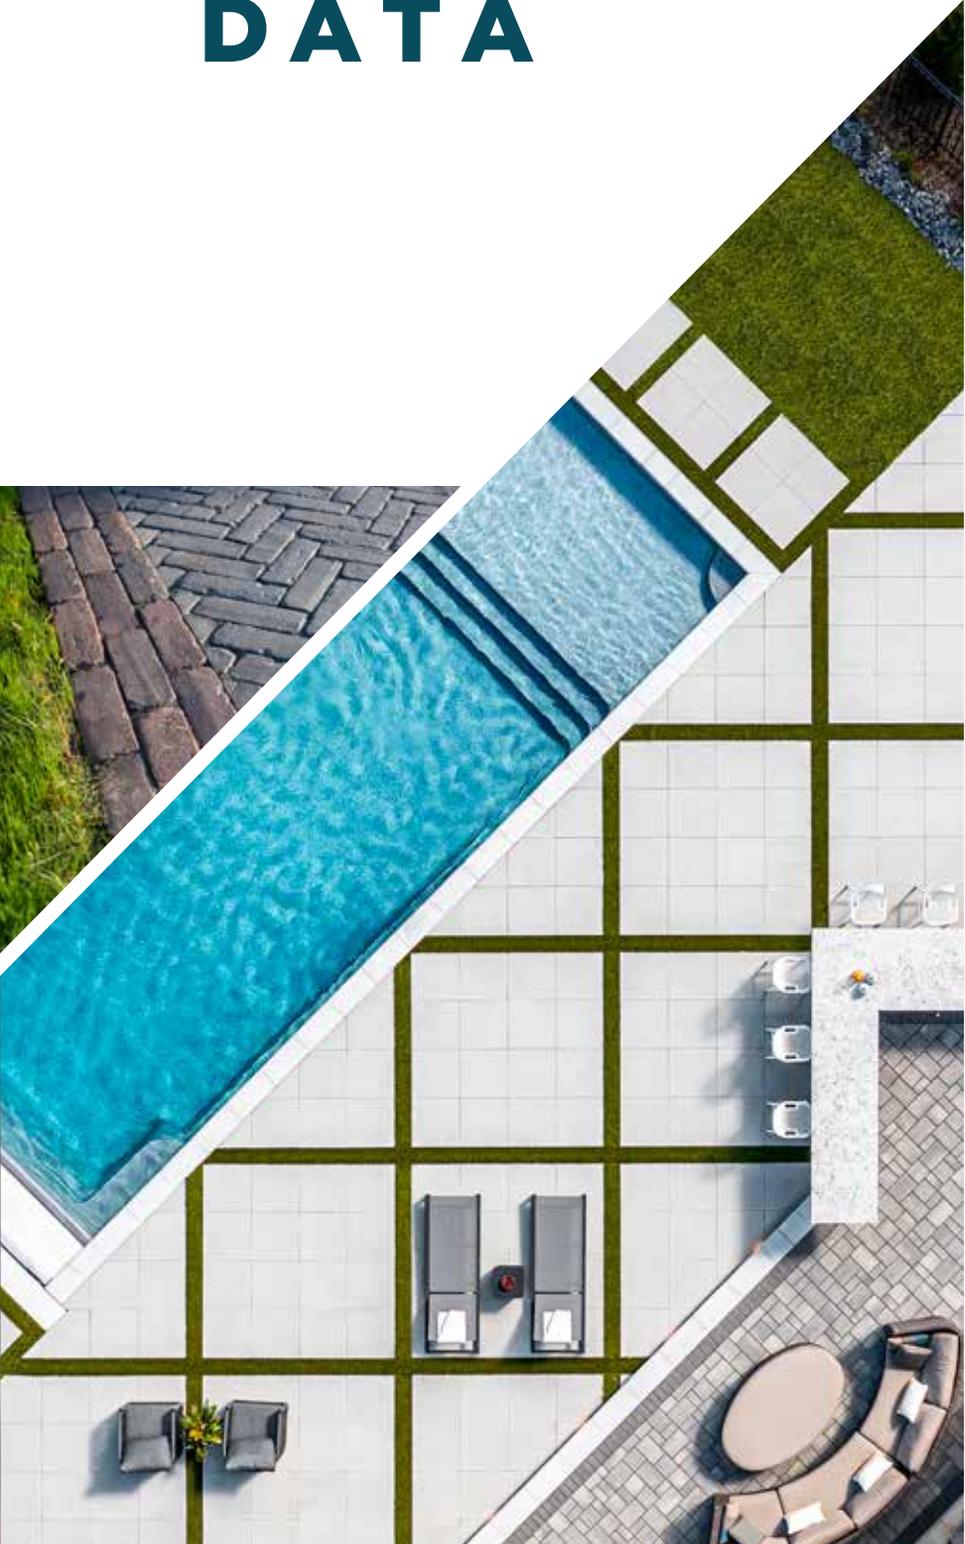

TRANSFORMING
HARDSCAPES

UNILOCK®

THE ONE INNOVATOR WITH GAME-CHANGING PRODUCTS

BUILD VERTICALS FASTER

When the plan calls for pillars, a grill island or any vertical feature, the U-Cara Modular System lets you create customizable features in hours - not days!

Simply build the sturdy, aluminum frame in any configuration and choose from a wide selection of fascia panels to clad it with.



THE
ONE



Learn more

U-CARA
MODULAR SYSTEM

TABLE OF CONTENTS - NEW YORK

PAVERS

| | |
|-----------------------------------|----|
| ADA Paver | 04 |
| Arcana™ | 05 |
| Artline™ Smooth | 06 |
| Artline™ Umbriano® | 07 |
| Beacon Hill™ Flagstone 60mm | 08 |
| Beacon Hill™ Flagstone 80mm | 09 |
| Beacon Hill™ Smooth | 10 |
| Bristol Valley® | 12 |
| Brussels Block® | 13 |
| Copthorne® | 14 |
| Courtstone® | 15 |
| Dura-Mat™ | 16 |
| Eco-Line® | 17 |
| Eco-Optiloc™ | 18 |
| Eco-Priora™ | 19 |
| Eco-Promenade® | 20 |
| Eco-Stone™ | 21 |
| Granito™ | 22 |
| Hex™ | 23 |
| Holland Premier™ | 24 |
| Il Campo® | 25 |
| Mattoni™ | 26 |
| Natural Stone (New Random Bundle) | 27 |
| Natural Stone Sandstone | 28 |
| Natural Stone Limestone | 31 |
| Nordic Cobble™ | 33 |
| Optiloc™ | 34 |
| Porcelain | 35 |
| Promenade™ | 36 |
| Promenade EcoTerra™ | 38 |
| Revela™ | 39 |
| Richcliff® | 41 |
| Series™ | 42 |
| Skyline™ | 43 |
| Soreno™ | 44 |
| Thornbury™ Smooth | 45 |
| Town Hall® | 46 |
| Transition™ | 47 |
| Treo® Premier | 48 |
| Treo® Smooth | 49 |
| Tribeca Cobble™ | 50 |
| Turfstone™ | 51 |
| Umbriano® | 52 |
| Urban™ | 54 |
| Westport™ | 55 |

RETAINING WALLS

| | |
|--------------------------------|----|
| Brussels Dimensional System™ | 56 |
| Concord Wall™ | 57 |
| DuraHold® | 59 |
| DuraHold2® | 60 |
| Estate Wall™ | 62 |
| Lineo™ Dimensional Stone | 67 |
| PisaEdge | 69 |
| Rivercrest® Wall | 70 |
| SienaEdge™ | 71 |
| SienaStone™ | 72 |
| U-Cara® Multi-Face Wall System | 73 |
| U-Cara® Modular System | 78 |
| U-Cara® Wall Mount System | 79 |

COPING, STEPS, PILLAR CAPS

| | |
|--------------------------|----|
| Architectural Pillar Cap | 80 |
| Fullnose Edger™ | 81 |
| Ledgestone™ | 82 |
| Umbriano® Coping | 84 |
| Universal Coping & Base | 85 |


FIRE FEATURES

| | |
|--------------------------------|----|
| Sunset Firepit | 86 |
| RomanStack™ Firepit | 87 |
| Architectural Paver Collection | 88 |


ACCESSORIES

| | |
|--------------------------------|----|
| Cleaners/Sealers/ Paver Edging | 92 |
| Adhesive | 93 |
| Sands | 93 |
| Sand Charts | 94 |
| Paver Spacers | 94 |
| Edge Restraints | 95 |
| Unilock Drivegrid System | 95 |
| Landscape Fabric | 96 |
| Fireplace Insert | 96 |
| Large Equipment | 97 |
| Bedding Materials Chart | 98 |
| Base Thickness Chart | 99 |

APPLICATION INDEX

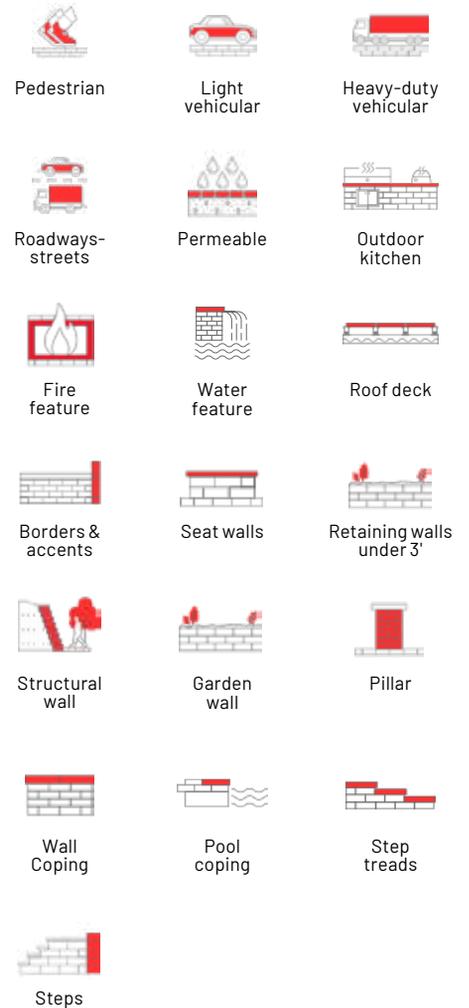

DESCRIPTION OF EDGE DETAILS

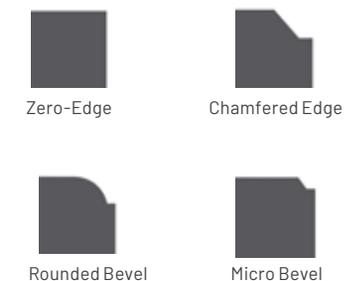



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
 Surface Texture - Smooth
 Joint Spacing - 3 mm

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

DRIVE FRIENDLY

Can handle vehicular loads

TECHNICAL INFORMATION

Conforms to ASTM C936
 Eligible for LEED v4.1 credits

| | |
|--------------------|-----------------|
| | STANDARD |
| Bundle Type | SINGLE |
| Plant Produced | NEW YORK |
| Thickness (mm) | 70 MM |

| | | |
|-----------------|----------|-------|
| SQFT PER | Bundle | 93.04 |
| | Layer | 11.63 |
| | Sections | - |
| | Stone | 0.97 |

| | | |
|-------------------|----------|------|
| PER BUNDLE | Layers | 8.00 |
| | Sections | - |

| | | |
|-------------------------|----------|-------|
| SOLDIER LNFT PER | SqFt | 1.02 |
| | Sections | - |
| | Layer | 11.81 |
| | Bundle | 94.49 |

| | | |
|------------------------|----------|-------|
| SAILOR LNFT PER | SqFt | 1.02 |
| | Sections | - |
| | Layer | 11.81 |
| | Bundle | 94.49 |

| | | |
|------------------|----------|-------|
| UNITS PER | SqFt | 1.03 |
| | Sections | - |
| | Bundle | 96.00 |

| | | |
|----------------|----------|-------|
| LBS PER | Layer | 415 |
| | Sections | - |
| | Bundle | 3,316 |

| COLORS | Reflectance | Stock |
|---------------|--------------------|--------------|
| Dark Charcoal | SR n/a SRI n/a | ✓ |
| Red | SR .40 SRI 44 | ✓ |



CHARCOAL



RED

Single Unit



STANDARD
 300 x 300 x 70mm
 11 7/8 x 11 7/8 x 2 3/4
 96 units/Bundle
 .97 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
Surface Texture - Smooth
Joint Spacing - 0 mm

TECHNOLOGIES

ENDURACOLOR™
Refined surface and long-lasting color


EASYCLEAN™

Factory Sealed to provide integral stain resistance


TECHNICAL INFORMATION

Conforms to ASTM C 1782
Eligible for LEED v4.1 credits

LAYING PATTERNS



Arcana Random A



Arcana Random C



AVORIO



CORVARA



MODENA



VIVANTO



IDEAL FOR PEDESTAL



X & T Slab Spacers
Bagged Separately

| | 12 x 24 | 18 x 24 | 24 x 24 |
|--------------------|---------------|---------|---------|
| Bundle Type | SINGLE SINGLE | SINGLE | SINGLE |
| Plant Produced | CHICAGO | CHICAGO | CHICAGO |
| Thickness (mm) | 50 MM | 50 MM | 50 MM |

| SQFT PER | Bundle | 36.00 | 54.00 | 72.00 |
|----------|----------|-------|-------|-------|
| | Layer | 4.00 | 6.00 | 8.00 |
| | Sections | - | - | - |
| | Stone | 2.00 | 3.00 | 4.00 |

| PER BUNDLE | Layers | 9.00 | 9.00 | 9.00 |
|------------|----------|------|------|------|
| | Sections | - | - | - |

| SOLDIER LNFT PER | SqFt | 0.49 | 0.50 | 0.50 |
|------------------|----------|-------|-------|-------|
| | Sections | - | - | - |
| | Layer | 1.98 | 2.97 | 3.98 |
| | Bundle | 17.78 | 26.75 | 35.79 |

| SAILOR LNFT PER | SqFt | 0.99 | 0.66 | 0.50 |
|-----------------|----------|-------|-------|-------|
| | Sections | - | - | - |
| | Layer | 3.98 | 3.98 | 3.98 |
| | Bundle | 35.79 | 35.79 | 35.79 |

| UNITS PER | SqFt | 0.50 | 0.33 | 0.25 |
|-----------|----------|-------|-------|-------|
| | Sections | - | - | - |
| | Bundle | 18.00 | 18.00 | 18.00 |

| LBS PER | Layer | 96 | 144 | 192 |
|---------|----------|-----|-------|-------|
| | Sections | - | - | - |
| | Bundle | 864 | 1,296 | 1,728 |

| COLORS | Reflectance | Stock | Stock | Stock |
|---------|---------------|-------|-------|-------|
| Avorio | SR .56 SRI 66 | SO | SO | SO |
| Corvara | SR .30 SRI 34 | SO | SO | SO |
| Modena | SR .46 SRI 53 | SO | SO | SO |
| Vivanto | SR .18 SRI 16 | SO | SO | SO |

| | | | | | | |
|--------------|---|--|---|--|---|--|
| Single Units |  | <p>12 x 24 301 x 606 x 50mm 11⁷/₈ x 23⁷/₈ x 2" 18 units/Bundle 2 Sq.Ft./Stone</p> |  | <p>18 x 24 453 x 606 x 50mm 17⁷/₈ x 23⁷/₈ x 2" 18 units/Bundle 3 Sq.Ft./Stone</p> |  | <p>24 x 24 606 x 606 x 50mm 23⁷/₈ x 23⁷/₈ x 2" 18 units/Bundle 4 Sq.Ft./Stone</p> |
|--------------|---|--|---|--|---|--|

Notes: **Special Order items, lead time is required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Unilock offers adjustable and stackable pedestal systems; please contact your Territory Manager for pricing and availability. **Product is not intended for vehicular applications.** All measurements are nominal. Unilock recommends to install Arcana using T and X Slab spacers. Please contact your Territory Manager for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Smooth
 Joint Spacing - 3 mm


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Artline Random A



FOSSIL



STEEL MOUNTAIN

| | | MULTIPLE SIZES |
|--|--------------------|----------------|
| | Bundle Type | RANDOM |
| | Plant Produced | NEW YORK |
| | Thickness (mm) | 70 MM |

| | | |
|-----------------|----------|-------|
| SQFT PER | Bundle | 93.25 |
| | Layer | 11.66 |
| | Sections | - |
| | Stone | 0.49 |

| | | |
|-------------------|----------|------|
| PER BUNDLE | Layers | 8.00 |
| | Sections | - |

| | | |
|-------------------------|----------|---|
| SOLDIER LNFT PER | SqFt | - |
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| | | |
|------------------------|----------|---|
| SAILOR LNFT PER | SqFt | - |
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| | | |
|------------------|----------|--------|
| UNITS PER | SqFt | 2.06 |
| | Sections | - |
| | Bundle | 192.00 |

| | | |
|----------------|----------|-------|
| LBS PER | Layer | 388 |
| | Sections | - |
| | Bundle | 3,100 |

| COLORS | Reflectance | Stock |
|----------------|---------------|-------|
| Fossil | SR .22 SRI 21 | ✓ |
| Steel Mountain | SR .30 SRI 32 | ✓ |



CONTRACTORS



COMMERCIAL

| | | |
|----------------------|---|--|
| 7 Unit Random Bundle |  |  |
| | <p>UNIT A 125 x 169 x 70mm 4 7/8 x 6 7/8 x 2 3/4" 32 units/Bundle .23 Sq.Ft./Stone</p> | <p>UNIT B 125 x 262.5 x 70mm 4 7/8 x 10 3/8 x 2 3/4" 32 units/Bundle .35 Sq.Ft./Stone</p> |

| | | | | | |
|----------------------|--|--|---|--|--|
| 7 Unit Random Bundle |  |  |  |  |  |
| | <p>UNIT C 125 x 337.5 x 70mm 4 7/8 x 13 1/4 x 2 3/4" 32 units/Bundle .45 Sq.Ft./Stone</p> | <p>UNIT D 125 x 450 x 70mm 4 7/8 x 17 3/4 x 2 3/4" 32 units/Bundle .61 Sq.Ft./Stone</p> | <p>UNIT E 187.5 x 225 x 70mm 7 3/8 x 8 7/8 x 2 3/4" 32 units/Bundle .45 Sq.Ft./Stone</p> | <p>UNIT F 187.5 x 337.5 x 70mm 7 3/8 x 13 3/8 x 2 3/4" 16 units/Bundle .58 Sq.Ft./Stone</p> | <p>UNIT G 187.5 x 450 x 70mm 7 3/8 x 17 1/4 x 2 3/4" 16 units/Bundle .91 Sq.Ft./Stone</p> |

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Umbriano Mottled
 Joint Spacing - 3 mm

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

EASYCLEAN™

Factory sealed to provide integral stain resistance


COLORFUSION™

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Artline Random A



FRENCH GREY



WINTER MARVEL

| MULTIPLE SIZES | |
|----------------|----------|
| Bundle Type | RANDOM |
| Plant Produced | NEW YORK |
| Thickness (mm) | 70 MM |

| | | |
|----------|----------|-------|
| SQFT PER | Bundle | 93.25 |
| | Layer | 11.66 |
| | Sections | - |
| | Stone | 0.49 |

| | | |
|------------|----------|------|
| PER BUNDLE | Layers | 8.00 |
| | Sections | - |

| | | |
|------------------|----------|---|
| SOLDIER LNFT PER | SqFt | - |
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| | | |
|-----------------|----------|---|
| SAILOR LNFT PER | SqFt | - |
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| | | |
|-----------|----------|--------|
| UNITS PER | SqFt | 2.06 |
| | Sections | - |
| | Bundle | 192.00 |

| | | |
|---------|----------|-------|
| LBS PER | Layer | 414 |
| | Sections | - |
| | Bundle | 3,310 |

| COLORS | Reflectance | Stock |
|---------------|---------------|-------|
| French Grey | SR .35 SRI 38 | ✓ |
| Winter Marvel | SR .18 SRI 17 | ✓ |


7 Unit Random Bundle



UNIT C
 125 x 337.5 x 70mm
 4 7/8 x 13 1/4 x 2 3/4"
 32 units/Bundle
 .45 Sq.Ft./Stone



UNIT D
 125 x 450 x 70mm
 4 7/8 x 17 3/4 x 2 3/4"
 32 units/Bundle
 .61 Sq.Ft./Stone



UNIT E
 187.5 x 225 x 70mm
 7 3/8 x 8 7/8 x 2 3/4"
 32 units/Bundle
 .45 Sq.Ft./Stone



UNIT F
 187.5 x 337.5 x 70mm
 7 3/8 x 13 3/8 x 2 3/4"
 16 units/Bundle
 .58 Sq.Ft./Stone



UNIT G
 187.5 x 450 x 70mm
 7 3/8 x 17 1/4 x 2 3/4"
 16 units/Bundle
 .91 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Textured
 Joint Spacing - 7 mm
 Void - n/a


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Beacon Hill Fixed
Random A



Beacon Hill Fixed
Random B



ALMOND GROVE



FOSSIL



SIERRA



STEEL MOUNTAIN



TUSCANY



WALNUT

| | | | | | | |
|-------------------------|--|--|--|---|--|--|
| 3 Unit Random Bundle | | LARGE RECTANGLE 380 x 570 x 60mm 15 x 22 1/2 x 2 3/8" 20 Units/Bundle 2.33 SqFt/Stone | | SQUARE 380 x 380 x 60mm 15 x 15 x 2 3/8" 30 units/Bundle 1.55 Sq.Ft./Stone | | SMALL RECTANGLE 380 x 190 x 60mm 15 x 7 1/2 x 2 3/8" 30 units/Bundle .78 Sq.Ft./Stone |
|-------------------------|--|--|--|---|--|--|

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.**
 All measurements are nominal. Contact Unilock for more information.

| Bundle Type | RANDOM |
|----------------|----------|
| Plant Produced | NEW YORK |
| Thickness (mm) | 60 MM |

| SQFT PER | Bundle | 116.57 |
|----------|----------|--------|
| | Layer | 11.66 |
| | Sections | - |
| | Stone | 1.46 |

| PER BUNDLE | Layers | 10.00 |
|------------|----------|-------|
| | Sections | - |

| SOLDIER LNFT PER | SqFt | - |
|------------------|----------|---|
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| SAILOR LNFT PER | SqFt | 0.80 |
|-----------------|----------|-------|
| | Sections | - |
| | Layer | 9.35 |
| | Bundle | 93.50 |

| UNITS PER | SqFt | 0.69 |
|-----------|----------|-------|
| | Sections | - |
| | Bundle | 80.00 |

| LBS PER | Layer | 328 |
|---------|----------|-------|
| | Sections | - |
| | Bundle | 3,279 |

| COLORS | Reflectance | Stock |
|----------------|----------------|-------|
| Almond Grove | SR .25 SRI 25 | ✓ |
| Fossil | SR .22 SRI 21 | ✓ |
| Sierra | SR n/a SRI n/a | ✓ |
| Steel Mountain | SR .30 SRI 32 | ✓ |
| Tuscany | SR .39 SRI 44 | ✓ |
| Walnut | SR n/a SRI n/a | ✓ |



APPLICATIONS



APPEARANCE

- Edge Detail - Rounded
- Surface Texture - Textured
- Joint Spacing - 4 mm
- Void - n/a


TECHNOLOGIES

- ENDURACOLOR™**
- Refined surface and long-lasting color


TECHNICAL INFORMATION

- Conforms to ASTM C 936
- Eligible for LEED v4.1 credits

LAYING PATTERNS



Beacon Hill Fixed Random A



Beacon Hill Fixed Random B



FOSSIL



STEEL MOUNTAIN



WALNUT

| | |
|--------------------|---------------|
| Bundle Type | RANDOM |
| Plant Produced | NEW YORK |
| Thickness (mm) | 80 MM |

| | | |
|-----------------|----------|-------|
| SQFT PER | Bundle | 81.59 |
| | Layer | 11.65 |
| | Sections | - |
| | Stone | 1.46 |

| | | |
|-------------------|----------|------|
| PER BUNDLE | Layers | 7.00 |
| | Sections | - |

| | | |
|-------------------------|----------|---|
| SOLDIER LNFT PER | SqFt | - |
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| | | |
|------------------------|----------|-------|
| SAILOR LNFT PER | SqFt | 0.80 |
| | Sections | - |
| | Layer | 9.35 |
| | Bundle | 65.45 |

| | | |
|------------------|----------|-------|
| UNITS PER | SqFt | 0.69 |
| | Sections | - |
| | Bundle | 56.00 |

| | | |
|----------------|----------|-------|
| LBS PER | Layer | 427 |
| | Sections | - |
| | Bundle | 2,988 |

| COLORS | Reflectance | Stock |
|----------------|----------------|-------|
| Fossil | SR .22 SRI 21 | ✓ |
| Steel Mountain | SR .30 SRI 32 | ✓ |
| Walnut | SR n/a SRI n/a | ✓ |

3 Unit Random Bundle



LARGE RECTANGLE
380 x 570 x 80mm
15½ x 22½ x 3 ⅛"
14 Units/Bundle
2.33 SqFt./Stone



SQUARE
380 x 380 x 80mm
15 x 15 x 3 ⅛"
21 units/Bundle
1.55 Sq.Ft./Stone



SMALL RECTANGLE
380 x 190 x 80mm
15 x 7½ x 3 ⅛"
21 units/Bundle
.78 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - 4 mm
 Void - n/a


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



BeaconHill Fixed
Random A



BeaconHill Fixed
Random B

| | | | | |
|--------------------|---------------|---------------|---------------|-----------------|
| | | | XL | SMALL RECTANGLE |
| Bundle Type | RANDOM | SINGLE | SINGLE | SINGLE |
| Plant Produced | NEW YORK | NEW YORK | NEW YORK | NEW YORK |
| Thickness (mm) | 60 MM | 60 MM | 60 MM | 60 MM |

| | | | | |
|-----------------|----------|--------|-------|--------|
| SQFT PER | Bundle | 116.57 | 81.59 | 116.57 |
| | Layer | 11.66 | 11.66 | 11.66 |
| | Sections | - | - | - |
| | Stone | 1.46 | 5.83 | 0.78 |

| | | | | |
|-------------------|----------|-------|------|-------|
| PER BUNDLE | Layers | 10.00 | 7.00 | 10.00 |
| | Sections | - | - | - |

| | | | | |
|-------------------------|----------|---|-------|-------|
| SOLDIER LNFT PER | SqFt | - | 0.32 | 0.78 |
| | Sections | - | - | - |
| | Layer | - | 3.74 | 9.35 |
| | Bundle | - | 26.18 | 93.50 |

| | | | | |
|------------------------|----------|-------|-------|--------|
| SAILOR LNFT PER | SqFt | 0.80 | 0.53 | 1.60 |
| | Sections | - | - | - |
| | Layer | 9.35 | 6.23 | 18.70 |
| | Bundle | 93.50 | 43.61 | 187.01 |

| | | | | |
|------------------|----------|-------|-------|--------|
| UNITS PER | SqFt | 0.69 | 0.17 | 1.29 |
| | Sections | - | - | - |
| | Bundle | 80.00 | 14.00 | 150.00 |

| | | | | |
|----------------|----------|-------|-------|-------|
| LBS PER | Layer | 320 | 320 | 332 |
| | Sections | - | - | - |
| | Bundle | 3,199 | 2,240 | 3,318 |

| COLORS | Reflectance | Stock | Stock | Stock |
|----------------|----------------|-------|-------|-------|
| Almond Grove | SR .25 SRI 25 | ✓ | ✓ | ✓ |
| Fossil | SR .22 SRI 21 | ✓ | ✓ | ✓ |
| Dark Charcoal | SR n/a SRI n/a | | | ✓ |
| Steel Mountain | SR .30 SRI 32 | ✓ | ✓ | ✓ |
| Tuscany | SR .39 SRI 44 | ✓ | ✓ | ✓ |
| Opal Blend | SR .48 SRI 56 | ✓ | ✓ | ✓ |
| Walnut | SR n/a SRI n/a | ✓ | ✓ | ✓ |



ALMOND GROVE



FOSSIL



DARK CHARCOAL



STEEL MOUNTAIN



TUSCANY



OPAL BLEND



WALNUT

| | | | | | | | | | | | |
|-----------------------------|--|---|--|---|--|--|------------------------|--|--|--|---|
| 3 Unit Random Bundle | | LARGE RECTANGLE 380 x 570 x 60mm 15 x 22 1/2 x 2 3/8" 20 Units/Bundle 2.33 SqFt./Stone | | SQUARE 380 x 380 x 60mm 15 x 15 x 2 3/8" 30 units/Bundle 1.55 Sq.Ft./Stone | | SMALL RECTANGLE 380 x 190 x 60mm 15 x 7 1/2 x 2 3/8" 30 units/Bundle .78 Sq.Ft./Stone | Sold Separately | | XL UNIT 950 x 570 x 60mm 37 1/2 x 22 1/2 x 2 3/8" 14 units/Bundle 5.83 Sq.Ft./Stone | | SMALL RECTANGLE 380 x 190 x 60mm 15 x 7 1/2 x 2 3/8" 150 units/Bundle .78 Sq.Ft./Stone |
|-----------------------------|--|---|--|---|--|--|------------------------|--|--|--|---|

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.**
 All measurements are nominal. Contact Unilock for more information. Please contact Customer Service for XL Walnut configurations.



APPLICATIONS



APPEARANCE

- Edge Detail - Rounded
- Surface Texture - Smooth
- Joint Spacing - 4 mm
- Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™

Factory Sealed to provide integral stain resistance


COMFORT STEP™

Ultra-smooth surface texture


TECHNICAL INFORMATION

- Conforms to ASTM C 936
- Eligible for LEED v4.1 credits

LAYING PATTERNS



BeaconHill Fixed
Random A



BeaconHill Fixed
Random B

| | | EASYCLEAN |
|----------------|--|-----------|
| Bundle Type | | RANDOM |
| Plant Produced | | NEW YORK |
| Thickness (mm) | | 60 MM |

| | | |
|----------|----------|--------|
| SQFT PER | Bundle | 116.57 |
| | Layer | 11.66 |
| | Sections | - |
| | Stone | 0.78 |

| | | |
|------------|----------|-------|
| PER BUNDLE | Layers | 10.00 |
| | Sections | - |

| | | |
|------------------|----------|-------|
| SOLDIER LNFT PER | SqFt | 0.80 |
| | Sections | - |
| | Layer | 9.35 |
| | Bundle | 93.50 |

| | | |
|-----------------|----------|--------|
| SAILOR LNFT PER | SqFt | 1.60 |
| | Sections | - |
| | Layer | 18.70 |
| | Bundle | 187.01 |

| | | |
|-----------|----------|--------|
| UNITS PER | SqFt | 1.29 |
| | Sections | 15.00 |
| | Bundle | 150.00 |

| | | |
|---------|----------|-------|
| LBS PER | Layer | 332 |
| | Sections | - |
| | Bundle | 3,318 |

| COLORS | Reflectance | Stock |
|----------------|---------------|-------|
| Almond Grove | SR .25 SRI 25 | ✓ |
| Steel Mountain | SR .30 SRI 32 | ✓ |
| Opal Blend | SR .32 SRI 34 | ✓ |



ALMOND GROVE



STEEL MOUNTAIN



OPAL BLEND

3 Unit Random Bundle



LARGE RECTANGLE
380 x 570 x 60mm
15 x 22 1/2 x 2 3/8"
20 Units/Bundle
2.33 SqFt./Stone



SQUARE
380 x 380 x 60mm
15 x 15 x 2 3/8"
30 units/Bundle
1.55 Sq.Ft./Stone



SMALL RECTANGLE
380 x 190 x 60mm
15 x 7 1/2 x 2 3/8"
30 units/Bundle
.78 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.**
All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Textured
 Joint Spacing - 7 mm
 Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

EASYSOFT™

Factory Sealed to provide integral stain resistance


COMFORT STEP™

Ultra-smooth surface texture


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Bristol Valley Fixed
Random A



Bristol Valley Fixed
Random B

| Bundle Type | RANDOM |
|----------------|----------|
| Plant Produced | UXBRIDGE |
| Thickness (mm) | 60 MM |

| SQFT PER | Bundle | 116.57 |
|----------|----------|--------|
| | Layer | 11.66 |
| | Sections | - |
| | Stone | - |

| PER BUNDLE | Layers | 10.00 |
|------------|----------|-------|
| | Sections | - |

| SOLDIER LNFT PER | SqFt | - |
|------------------|----------|---|
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| SAILOR LNFT PER | SqFt | 0.80 |
|-----------------|----------|-------|
| | Sections | - |
| | Layer | 9.35 |
| | Bundle | 93.50 |

| UNITS PER | SqFt | - |
|-----------|----------|----|
| | Sections | - |
| | Bundle | 80 |

| LBS PER | Layer | 296 |
|---------|----------|-------|
| | Sections | - |
| | Bundle | 2,957 |

| COLORS | Reflectance | Stock |
|----------------|----------------|-------|
| Fossil | SR .22 SRI 21 | ✓ |
| Steel Mountain | SR .30 SRI 32 | ✓ |
| Walnut | SR n/a SRI n/a | ✓ |



FOSSIL



STEEL MOUNTAIN



WALNUT

3 Unit Random Bundle



LARGE RECTANGLE
 380 x 570 x 60mm
 15 x 22 1/2 x 2 3/8"
 20 Units/Bundle
 2.33 SqFt./Stone



SQUARE
 380 x 380 x 60mm
 15 x 15 x 2 3/8"
 30 units/Bundle
 1.55 Sq.Ft./Stone



SMALL RECTANGLE
 380 x 190 x 60mm
 15 x 7 1/2 x 2 3/8"
 30 units/Bundle
 .78 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.**
 All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Smooth
 Joint Spacing - 2 mm

TECHNOLOGIES

CLASSIC
 Budget-friendly traditional product mix


ANTIQUED

Distressed, timeworn finish


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits


LAYING PATTERNS



Brussels Multi-Unit
Random AC



Brussels Multi-Unit
Random AD



Brussels Multi-Unit
Random AE



ALMOND GROVE



CHARCOAL



LIMESTONE



SIERRA

| | HALF | STANDARD | XL |
|--------------------|---------------|---------------|---------------|
| Bundle Type | SINGLE | SINGLE | SINGLE |
| Plant Produced | UXBRIDGE | UXBRIDGE | UXBRIDGE |
| Thickness (mm) | 70 MM | 70 MM | 70 MM |

| SQFT PER | Bundle | 88.70 | 88.60 | 76.56 |
|----------|----------|-------|-------|-------|
| | Layer | - | - | - |
| | Sections | 12.67 | 12.66 | 25.52 |
| | Stone | 0.20 | 0.40 | 0.80 |

| PER BUNDLE | Layers | - | - | - |
|------------|----------|---|---|---|
| | Sections | 7 | 7 | 3 |

| SOLDIER LNFT PER | SqFt | 1.72 | 1.44 | 0.86 |
|------------------|----------|--------|--------|-------|
| | Sections | 21.84 | 18.27 | 21.84 |
| | Layer | - | - | - |
| | Bundle | 152.86 | 127.87 | 65.51 |

| SAILOR LNFT PER | SqFt | 2.87 | 1.73 | 1.43 |
|-----------------|----------|--------|--------|--------|
| | Sections | 36.33 | 21.84 | 36.54 |
| | Layer | - | - | - |
| | Bundle | 254.28 | 152.86 | 109.61 |

| UNITS PER | SqFt | 5.05 | 2.53 | 1.25 |
|-----------|----------|--------|--------|-------|
| | Sections | 64.00 | 32.00 | 32.00 |
| | Bundle | 448.00 | 224.00 | 96.00 |

| LBS PER | Layer | - | - | - |
|---------|----------|-------|-------|-------|
| | Sections | 398 | 455 | 843 |
| | Bundle | 2,789 | 3,187 | 2,528 |

| COLORS | Reflectance | Stock | Stock | Stock |
|--------------|----------------|-------|-------|-------|
| Almond Grove | SR n/a SRI n/a | ✓ | ✓ | ✓ |
| Charcoal | SR n/a SRI n/a | | ✓ | |
| Limestone | SR .28 SRI 29 | ✓ | ✓ | ✓ |
| Sierra | SR n/a SRI n/a | ✓ | ✓ | ✓ |

Single Units



HALF
 104 x 173 x 70mm
 4 x 6 7/8 x 2 3/4"
 448 units/Bundle
 .20 Sq.Ft./Stone



STANDARD
 173 x 208 x 70mm
 6 7/8 x 8 1/4 x 2 3/4"
 224 units/Bundle
 .40 Sq.Ft./Stone



XL
 208 x 348 x 70mm
 8 1/4 x 13 3/4 x 2 3/4"
 96 units/Bundle
 .80 Sq.Ft./Stone

Notes: All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - n/a
 Surface Texture - Textured
 Joint Spacing - 3 mm
 Void - n/a

TECHNOLOGIES

ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

EASYSOAK™

Factory Sealed to provide integral stain resistance

REALA™

Cast from historical brick


ULTIMA™

Up to 4x stronger than poured-in-place concrete


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Copthorne A



Copthorne C



BASALT



BURGUNDY RED



BURNT CLAY



OLD OAK



ARCTIC GREY



STEEL BLUE

| Bundle Type | | SINGLE |
|----------------|--|--------|
| Plant Produced | | AYR |
| Thickness (mm) | | 60 MM |

| SQFT PER | Bundle | 89.20 |
|----------|----------|-------|
| | Layer | 11.15 |
| | Sections | - |
| | Stone | 0.15 |

| PER BUNDLE | Layers | 8.00 |
|------------|----------|------|
| | Sections | - |

| SOLDIER LNFT PER | SqFt | 1.43 |
|------------------|----------|--------|
| | Sections | - |
| | Layer | 15.99 |
| | Bundle | 127.95 |

| SAILOR LNFT PER | SqFt | 4.41 |
|-----------------|----------|--------|
| | Sections | - |
| | Layer | 49.21 |
| | Bundle | 393.70 |

| UNITS PER | SqFt | 6.73 |
|-----------|----------|--------|
| | Sections | - |
| | Bundle | 600.00 |

| LBS PER | Layer | 294 |
|---------|----------|-------|
| | Sections | - |
| | Bundle | 2,349 |

| COLORS | Reflectance | Stock |
|--------------|----------------|-------|
| Basalt | SR n/a SRI n/a | ✓ |
| Burgundy Red | SR .35 SRI 38 | ✓ |
| Burnt Clay | SR .36 SRI 40 | ✓ |
| Old Oak | SR .37 SRI 41 | ✓ |
| Arctic Grey | SR .49 SRI 57 | ✓ |
| Steel Blue | SR n/a SRI n/a | ✓ |

Single Unit



STANDARD
 65 x 200 x 60mm
 2 5/8 x 7 7/8 x 2 3/8"
 600 Units/Bundle
 .15 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 93. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

- Edge Detail - Zero
- Surface Texture - Textured
- Joint Spacing - 15 mm

TECHNOLOGIES

ELEGANCE™

Timeless, long-lasting beauty with the combination of Realta and Ultima technologies

EASYSOAK™

Factory Sealed to provide integral stain resistance

REALTA™

Cast from European cobblestones

ULTIMA™

Up to 4x stronger than poured-in-place concrete

TECHNICAL INFORMATION

Conforms to ASTM C 936 - Eligible for LEED v4.1 credits

LAYING PATTERNS



Courtstone Fixed Random A




BASALT

| Bundle Type | | RANDOM | |
|------------------|----------|----------------|-------|
| Plant Produced | | AYR | |
| Thickness (mm) | | 60 MM | |
| SQFT PER | Bundle | 98.30 | |
| | Layer | 12.29 | |
| | Sections | - | |
| | Stone | - | |
| PER BUNDLE | Layers | 8.00 | |
| | Sections | - | |
| SOLDIER LNFT PER | SqFt | - | |
| | Sections | - | |
| | Layer | - | |
| | Bundle | - | |
| SAILOR LNFT PER | SqFt | 2.25 | |
| | Sections | - | |
| | Layer | 27.69 | |
| | Bundle | 221.52 | |
| UNITS PER | SqFt | 3.91 | |
| | Sections | - | |
| | Bundle | 384.00 | |
| LBS PER | Layer | 291 | |
| | Sections | - | |
| | Bundle | 2,326 | |
| COLORS | | Reflectance | Stock |
| Basalt | | SR n/a SRI n/a | ✓ |

| 5 Unit Random Bundle | XL RECTANGLE | LARGE RECTANGLE | RECTANGLE | SMALL RECTANGLE | SQUARE |
|----------------------|--|--|--|--|--|
| | 215 x 130 x 60mm 8 3/8 x 5 1/8 x 2 3/8" | 185 x 130 x 60mm 7 1/4 x 5 1/8 x 2 3/8" | 165 x 130 x 60mm 6 1/2 x 5 1/8 x 2 3/8" | 145 x 130 x 60mm 5 3/4 x 5 1/8 x 2 3/8" | 130 x 130 x 60mm 5 1/8 x 5 1/8 x 2 3/8" |
| | 128 Units/Bundle .30 SqFt/Stone | 64 Units/Bundle .28 SqFt/Stone | 64 Units/Bundle .23 SqFt/Stone | 64 Units/Bundle .20 SqFt/Stone | 64 Units/Bundle .18 SqFt/Stone |

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Please refer to the Polymeric Sand Best Practices on Page 93. Contact Unilock for more information.

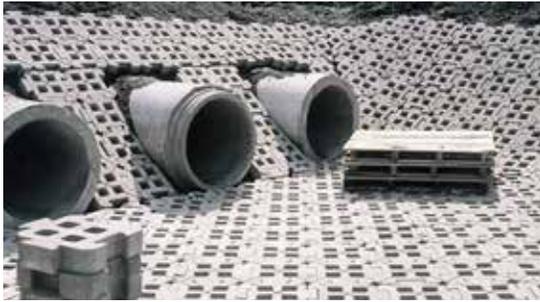

APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Smooth
 Joint Spacing - 3mm
 Void - 34.2%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

CLASSIC

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1319
 Eligible for LEED v4.1 credits



NATURAL

Single Unit



STANDARD
 500 x 500 x 100mm
 19 3/4 x 19 3/4 x 3 7/8"
 28 units/Bundle
 2.80 Sq.Ft./Stone

| | |
|--------------------|-----------------|
| | STANDARD |
| Bundle Type | SINGLE |
| Plant Produced | GORMLEY |
| Thickness (mm) | 100 MM |

| | | |
|-----------------|----------|-------|
| SQFT PER | Bundle | 78.40 |
| | Layer | 11.20 |
| | Sections | - |
| | Stone | 2.80 |

| | | |
|-------------------|----------|------|
| PER BUNDLE | Layers | 7.00 |
| | Sections | - |

| | | |
|-------------------------|----------|---|
| SOLDIER LNFT PER | SqFt | - |
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| | | |
|------------------------|----------|---|
| SAILOR LNFT PER | SqFt | - |
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| | | |
|------------------|----------|-------|
| UNITS PER | SqFt | 0.36 |
| | Sections | - |
| | Bundle | 28.00 |

| | | |
|----------------|----------|-------|
| LBS PER | Layer | 320 |
| | Sections | - |
| | Bundle | 2,240 |

| COLORS | Reflectance | Stock |
|---------------|--------------------|--------------|
| Natural | SR .30 SRI 32 | SO |

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Smooth / Exposed / Brushed / Umbriano Mottled
 Joint Spacing - 6.25 mm
 Void - 5.80%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

EASYSOAK™  (Umbriano)

Factory Sealed to provide integral stain resistance

COLOR FUSION™ (Umbriano)

Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Ecoline Fixed Random A

| | | | | | | | | |
|----------------------|--|--|--|---|--|--|---|---|
| 8 Unit Random Bundle |  |  |  |  |  |  |  |  |
| | UNIT A 357 x 84 x 100mm 14 x 3 5/16 x 3 7/8" 24 Units/Bundle .32 SqFt/Stone | UNIT B 317 x 84 x 100mm 12 1/2 x 3 5/16 x 3 7/8" 24 Units/Bundle .29 SqFt/Stone | UNIT C 277 x 84 x 100mm 12 x 3 5/16 x 3 7/8" 24 Units/Bundle .25 SqFt/Stone | UNIT D 237 x 84 x 100mm 9 3/8 x 3 5/16 x 3 7/8" 24 Units/Bundle .21 SqFt/Stone | UNIT E 357 x 114 x 100mm 14 x 4 1/2 x 3 7/8" 24 Units/Bundle .44 SqFt/Stone | UNIT F 317 x 114 x 100mm 12 1/2 x 4 1/2 x 3 7/8" 24 Units/Bundle .39 SqFt/Stone | UNIT G 277 x 84 x 100mm 11 x 4 1/2 x 3 7/8" 24 Units/Bundle .34 SqFt/Stone | UNIT H 237 x 114 x 100mm 9 3/8 x 4 1/2 x 3 7/8" 48 Units/Bundle .29 SqFt/Stone |

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.

| | | MULTIPLE SIZES |
|--|--------------------|----------------|
| | Bundle Type | RANDOM |
| | Plant Produced | NEW YORK |
| | Thickness (mm) | 100 MM |

| | | |
|-----------------|----------|-------|
| SQFT PER | Bundle | 66.20 |
| | Layer | 11.03 |
| | Sections | - |
| | Stone | 0.34 |

| | | |
|-------------------|----------|------|
| PER BUNDLE | Layers | 6.00 |
| | Sections | - |

| | | |
|-------------------------|----------|---|
| SOLDIER LNFT PER | SqFt | - |
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| | | |
|------------------------|----------|---|
| SAILOR LNFT PER | SqFt | - |
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| | | |
|------------------|----------|--------|
| UNITS PER | SqFt | 2.90 |
| | Sections | - |
| | Bundle | 216.00 |

| | | |
|----------------|----------|-------|
| LBS PER | Layer | 504 |
| | Sections | - |
| | Bundle | 3,027 |

| COLORS | Reflectance | Stock |
|------------------------------|----------------|-----------|
| Multiple Colors and Finishes | SR n/a SRI n/a | SO |



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
 Surface Texture - Smooth
 Joint Spacing - 12 mm
 Void - 7.3%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through


ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



EcoOptiloc Cluster C

| | |
|--------------------|-----------------|
| | STANDARD |
| Bundle Type | SINGLE |
| Plant Produced | NEW YORK |
| Thickness (mm) | 80 MM |

| | | |
|-----------------|----------|-------|
| SQFT PER | Bundle | 63.56 |
| | Layer | 9.08 |
| | Sections | - |
| | Stone | 0.50 |

| | | |
|-------------------|----------|------|
| PER BUNDLE | Layers | 7.00 |
| | Sections | - |

| | | |
|-------------------------|----------|---|
| SOLDIER LNFT PER | SqFt | - |
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| | | |
|------------------------|----------|---|
| SAILOR LNFT PER | SqFt | - |
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| | | |
|------------------|----------|--------|
| UNITS PER | SqFt | 1.98 |
| | Sections | - |
| | Bundle | 126.00 |

| | | |
|----------------|----------|-------|
| LBS PER | Layer | 292 |
| | Sections | - |
| | Bundle | 2,047 |

| COLORS | Reflectance | Stock |
|------------------------------|----------------|-------|
| Multiple Colors and Finishes | SR n/a SRI n/a | SO |

Single Unit



STANDARD
 250 x 250 x 80mm
 9 7/8 x 9 7/8 x 3 1/8"
 126 Units/Bundle
 .50 SqFt/Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Smooth
 Joint Spacing - 7 mm
 Void - 4.6 - 7.08%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

CLASSIC

Budget-friendly traditional product mix


ENDURACOLOR™

Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



EcoPriora 5x10 RB_A



EcoPriora 5x10 HB_E

| | 5 x 10 | 10 x 10 | 5 x 5 |
|--------------------|---------------|---------------|---------------|
| Bundle Type | SINGLE | SINGLE | SINGLE |
| Plant Produced | NEW YORK | NEW YORK | NEW YORK |
| Thickness (mm) | 80 MM | 80 MM | 80 MM |

| SQFT PER | Bundle | 75.95 | 86.60 | 74.59 |
|-----------------|----------|-------|-------|-------|
| | Layer | 10.85 | 12.37 | 10.66 |
| | Sections | - | - | - |
| | Stone | 0.31 | 0.62 | 0.15 |

| PER BUNDLE | Layers | 7.00 | 7.00 | 7.00 |
|-------------------|----------|------|------|------|
| | Sections | - | - | - |

| WSOLDIER LNFT PER | SqFt | 1.27 | 1.27 | 2.59 |
|--------------------------|----------|-------|--------|--------|
| | Sections | - | - | - |
| | Layer | 13.78 | 15.75 | 27.56 |
| | Bundle | 96.46 | 110.24 | 192.91 |


| SAILOR LNFT PER | SqFt | 2.54 | 1.27 | 2.59 |
|------------------------|----------|--------|--------|--------|
| | Sections | - | - | - |
| | Layer | 27.56 | 15.75 | 27.56 |
| | Bundle | 192.91 | 110.24 | 192.91 |

| UNITS PER | SqFt | 3.23 | 1.62 | 6.57 |
|------------------|--------|--------|--------|--------|
| | Layer | 35 | 20 | 70 |
| | Bundle | 245.00 | 140.00 | 490.00 |


| LBS PER | Layer | 388 | 443 | 381 |
|----------------|----------|-------|-------|-------|
| | Sections | - | - | - |
| | Bundle | 2,717 | 3,099 | 2,669 |

| COLORS | Reflectance | Stock | Stock | Stock |
|-----------------------------|----------------|-------|-------|-------|
| Granite (Classic) | SR .26 SRI 27 | ✓ | | |
| Steel Mountain | SR n/a SRI n/a | ✓ | | |
| Steel Grey | SR n/a SRI n/a | ✓ | | |
| Opal | SR n/a SRI n/a | ✓ | | |
| Multiple Color and Finishes | SR n/a SRI n/a | SO | SO | SO |

Multiple finishes available by Special Order. Please contact your Territory Manager for more details.



GRANITE



STEEL MOUNTAIN



STEEL GREY



OPAL

Single Units



5 x 10
 120 x 240 x 80mm
 4¾ x 9½ x 3⅞
 245 units/Bundle
 .31 Sq.Ft./Stone



10 x 10
 240 x 240 x 80mm
 9½ x 9½ x 3⅞
 140 units/Bundle
 .62 Sq.Ft./Stone
SPECIAL ORDER



5 x 5
 120 x 120 x 80mm
 4¾ x 4¾ x 3⅞
 490 units/Bundle
 .15 Sq.Ft./Stone
SPECIAL ORDER

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Smooth & Series Exposed
 Joint Spacing - 7 mm
 Void - 10.12 %

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

EASYSOAK™ (Umbriano)

Factory Sealed to provide integral stain resistance


COLOR FUSION™ (Umbriano)

Subtly mottled color finish


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits


LAYING PATTERNS



EcoPromenade 3x12
RB_A



EcoPromenade 3x12
HB_C



EcoPromenade 3x12
DHB_B

| | 3 x 12 | 4 x 16 |
|--------------------|----------|----------|
| Bundle Type | SINGLE | SINGLE |
| Plant Produced | NEW YORK | NEW YORK |
| Thickness (mm) | 100 MM | 100 MM |

| SQFT PER | Bundle | 63.94 | 62.00 |
|----------|----------|-------|-------|
| | Layer | 10.66 | 10.33 |
| | Sections | - | - |
| | Stone | 0.24 | 0.43 |

| PER BUNDLE | Layers | 6.00 | 6.00 |
|------------|----------|------|------|
| | Sections | - | - |

| SOLDIER LNFT PER | SqFt | 1.02 | 0.76 |
|------------------|----------|-------|-------|
| | Sections | - | - |
| | Layer | 10.83 | 7.87 |
| | Bundle | 64.96 | 47.24 |

| SAILOR LNFT PER | SqFt | 4.06 | 3.05 |
|-----------------|----------|--------|--------|
| | Sections | - | - |
| | Layer | 43.31 | 31.50 |
| | Bundle | 259.84 | 188.98 |

| UNITS PER | SqFt | 4.13 | 2.32 |
|-----------|--------|--------|--------|
| | Layer | 44 | 24 |
| | Bundle | 264.00 | 144.00 |

| LBS PER | Layer | 488 | 455 |
|---------|----------|-------|-------|
| | Sections | - | - |
| | Bundle | 2,927 | 2,730 |

| COLORS | Reflectance | Stock | Stock |
|------------------------------|----------------|-------|-------|
| Multiple Colors and Finishes | SR n/a SRI n/a | SO | SO |

Multiple finishes available by Special Order. Please contact your Territory Manager for more details.

Single Unit



3 x 12
 75 x 300 x 100mm
 3 x 11 7/8 x 3 7/8"
 264 units/Bundle
 .24 Sq.Ft./Stone



4 x 16
 100 x 400 x 100mm
 3 7/8 x 15 3/4 x 3 7/8"
 144 units/Bundle
 .43 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
 Surface Texture - Smooth
 Joint Spacing - 6mm
 Void - 10.18%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

| | |
|--------------------|-----------------|
| | STANDARD |
| Bundle Type | SINGLE |
| Plant Produced | NEW YORK |
| Thickness (mm) | 80 MM |

| | | |
|-----------------|----------|-------|
| SQFT PER | Bundle | 67.00 |
| | Layer | 9.57 |
| | Sections | - |
| | Stone | 0.27 |

| | | |
|-------------------|----------|------|
| PER BUNDLE | Layers | 7.00 |
| | Sections | - |

| | | |
|-------------------------|----------|---|
| SOLDIER LNFT PER | SqFt | - |
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| | | |
|------------------------|----------|---|
| SAILOR LNFT PER | SqFt | - |
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| | | |
|------------------|----------|--------|
| UNITS PER | SqFt | 3.66 |
| | Sections | - |
| | Bundle | 245.00 |

| | | |
|----------------|----------|-------|
| LBS PER | Layer | 349 |
| | Sections | - |
| | Bundle | 2,445 |

| COLORS | Reflectance | Stock |
|------------------------------|--------------------|--------------|
| Multiple Colors and Finishes | SR n/a SRI n/a | SO |

Single Unit



STANDARD
 115 x 230 x 80mm
 4 5/8 x 9 x 3 1/8"
 245 Units/Bundle
 .27 SqFt/Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



| | HEX | |
|----------------|---------|---------|
| Bundle Type | SINGLE | RANDOM |
| Plant Produced | ONTARIO | ONTARIO |
| Thickness (mm) | 70 MM | 60 MM |

| SQFT PER | Bundle | 73.92 | 94.14 |
|----------|----------|-------|-------|
| | Layer | 9.24 | 10.46 |
| | Sections | - | - |
| | Stone | 0.39 | 1.31 |

| PER BUNDLE | Layers | 8.00 | 9.00 |
|------------|----------|------|------|
| | Sections | - | - |

| SOLDIER LNFT PER | SqFt | - | - |
|------------------|----------|---|---|
| | Sections | - | - |
| | Layer | - | - |
| | Bundle | - | - |

| SAILOR LNFT PER | SqFt | - | 0.85 |
|-----------------|----------|---|-------|
| | Sections | - | - |
| | Layer | - | 8.86 |
| | Bundle | - | 79.72 |

| UNITS PER | SqFt | 2.60 | 0.76 |
|-----------|--------|--------|-------|
| | Layer | 24.00 | 8.00 |
| | Bundle | 192.00 | 72.00 |

| LBS PER | Layer | 306 | 287 |
|---------|----------|-------|-------|
| | Sections | - | - |
| | Bundle | 2,450 | 2,583 |

APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Granito/Granito
 Textured (Random)
 Joint Spacing - 7 mm

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

ARTISTA™

Boldly mottled color finish

EASYSOAK™


Factory Sealed to provide integral stain resistance

TECHNICAL INFORMATION


Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

| COLORS | Reflectance | Stock | Stock |
|--------|----------------|-------|-------|
| Notte | SR n/a SRI n/a | SO | SO |
| Sabia | SR n/a SRI n/a | SO | SO |
| Scuro | SR n/a SRI n/a | SO | SO |


LAYING PATTERNS



Granito Hex_A



Granito Fixed Random A



NOTTE HEX



SABIA HEX



SCURO HEX

| | | | | | | | | | |
|----------------------|---|--|---|---|---|--|-------------|---|--|
| 3-Unit Random Bundle |  | SMALL RECTANGLE 180 x 360 x 60mm 7 x 14 1/4 x 2 3/8" 27 units/Bundle .79 Sq.Ft./Stone |  | SQUARE 360 x 360 x 60mm 14 1/4 x 14 1/4 x 2 3/8" 27 units/Bundle 1.40 Sq.Ft./Stone |  | LARGE RECTANGLE 360 x 540 x 60mm 14 1/4 x 21 1/4 x 2 3/8" 18 units/Bundle 2.09 Sq.Ft./Stone | Single Unit |  | HEX 200 x 200 x 70mm 7 7/8 x 7 7/8 x 2 3/4" 192 units/Bundle .39 Sq.Ft./Stone |
|----------------------|---|--|---|---|---|--|-------------|---|--|

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro Surface Texture - Smooth/
Exposed

Joint Spacing - 3 mm

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

COLOR FUSION™ (Umbriano)

Subtly mottled color finish

EASYCLEAN™ (Umbriano)


Factory Sealed to provide integral stain resistance

TECHNICAL INFORMATION

Conforms to ASTM C 936

Eligible for LEED v4.1

LAYING PATTERNS



Hex Paver A

| | HEX | HEX PERMEABLE |
|--------------------|---------------|---------------|
| Bundle Type | SINGLE | SINGLE |
| Plant Produced | NEW YORK | NEW YORK |
| Thickness (mm) | 70 MM | 80 MM |

| SQFT PER | Bundle | 73.92 | 59.24 |
|----------|----------|-------|-------|
| | Layer | 9.24 | 8.46 |
| | Sections | - | - |
| | Stone | 0.39 | 0.42 |

| PER BUNDLE | Layers | 8.00 | 7.00 |
|------------|----------|------|------|
| | Sections | - | - |

| SOLDIER LNFT PER | SqFt | - | - |
|------------------|----------|---|---|
| | Sections | - | - |
| | Layer | - | - |
| | Bundle | - | - |

| SAILOR LNFT PER | SqFt | - | - |
|-----------------|----------|---|---|
| | Sections | - | - |
| | Layer | - | - |
| | Bundle | - | - |

| UNITS PER | SqFt | 2.60 | 2.36 |
|-----------|--------|--------|--------|
| | Layer | 24 | 20 |
| | Bundle | 192.00 | 140.00 |

| LBS PER | Layer | 306 | 310 |
|---------|----------|-------|-------|
| | Sections | - | - |
| | Bundle | 2,450 | 2,167 |

| COLORS | Reflectance | Stock | Stock |
|----------------------------|-----------------|-------|-------|
| Steel Mountain | SR .30 SRI 32 | ✓ | |
| Steel Grey | SR .12 SRI 9 | ✓ | |
| Opal | SR .48 SRI 56 | ✓ | |
| Multiple Colors & Finishes | SR .n/a SRI n/a | SO | SO |



STEEL MOUNTAIN



STEEL GREY



OPAL

Single Unit



HEX
200 x 200 x 70mm
7 7/8 x 7 7/8 x 2 3/4"
192 Units/Bundle
.39 SqFt/Stone



HEX PERMEABLE
200 x 200 x 80mm
7 7/8 x 7 7/8 x 3 1/8"
140 Units/Bundle
.42 SqFt/Stone



Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact UniLock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
 Surface Texture - Smooth
 Joint Spacing - 3 mm
 Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits


LAYING PATTERNS



HollandPremier 4x8
RB_B



HollandPremier 4x8
HB_C



HollandPremier 4x8
BW_D



DARK CHARCOAL



FOSSIL



HERITAGE BROWN



STEEL MOUNTAIN

| | |
|--------------------|-----------------|
| | STANDARD |
| Bundle Type | SINGLE |
| Plant Produced | NEW YORK |
| Thickness (mm) | 60 MM |

| | | |
|-----------------|----------|--------|
| SQFT PER | Bundle | 118.00 |
| | Layer | 11.80 |
| | Sections | - |
| | Stone | 0.22 |

| | | |
|-------------------|----------|-------|
| PER BUNDLE | Layers | 10.00 |
| | Sections | - |

| | | |
|-------------------------|----------|--------|
| SOLDIER LNFT PER | SqFt | 1.50 |
| | Sections | - |
| | Layer | 17.72 |
| | Bundle | 177.17 |

| | | |
|------------------------|----------|--------|
| SAILOR LNFT PER | SqFt | 3.00 |
| | Sections | - |
| | Layer | 35.43 |
| | Bundle | 354.33 |

| | | |
|------------------|--------|--------|
| UNITS PER | SqFt | 4.58 |
| | Layer | 54.00 |
| | Bundle | 540.00 |

| | | |
|----------------|----------|-------|
| LBS PER | Layer | 330 |
| | Sections | - |
| | Bundle | 3,305 |

| COLORS | Reflectance | Stock |
|----------------|----------------|-------|
| Dark Charcoal | SR n/a SRI n/a | ✓ |
| Fossil | SR .22 SRI 21 | ✓ |
| Heritage Brown | SR .35 SRI 36 | ✓ |
| Steel Mountain | SR .30 SRI 32 | ✓ |

Single Unit



STANDARD
 100 x 200 x 60mm
 3 7/8 x 7 7/8 x 2 3/8"
 540 units/Bundle
 .22 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Il Campo Brushed
 Joint Spacing - 3 mm
 Void - n/a


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits


LAYING PATTERNS



Il Campo 4x8 RB_F



Il Campo 4x8 SB_G



Il Campo 8x16 HB_E



DARK CHARCOAL



GRANITE



LIGHT GREY



SANDSTONE

| | | |
|--------------------|---------------|---------------|
| | 4 x 8 | 8 x 16 |
| Bundle Type | SINGLE | SINGLE |
| Plant Produced | ONTARIO | ONTARIO |
| Thickness (mm) | 70 MM | 70 MM |

| | | | |
|-----------------|----------|-------|-------|
| SQFT PER | Bundle | 94.40 | 82.67 |
| | Layer | 11.80 | 10.33 |
| | Sections | - | - |
| | Stone | 0.22 | 0.86 |

| | | | |
|-------------------|----------|------|------|
| PER BUNDLE | Layers | 8.00 | 8.00 |
| | Sections | - | - |

| | | | |
|-------------------------|----------|--------|-------|
| SOLDIER LNFT PER | SqFt | 1.50 | 0.76 |
| | Sections | - | - |
| | Layer | 17.72 | 7.87 |
| | Bundle | 141.73 | 62.99 |

| | | | |
|------------------------|----------|--------|--------|
| SAILOR LNFT PER | SqFt | 3.00 | 1.52 |
| | Sections | - | - |
| | Layer | 35.43 | 15.75 |
| | Bundle | 283.46 | 125.98 |

| | | | |
|------------------|----------|--------|-------|
| UNITS PER | SqFt | 4.58 | 1.16 |
| | Sections | - | - |
| | Bundle | 432.00 | 96.00 |

| | | | |
|----------------|----------|-------|-------|
| LBS PER | Layer | 377 | 343 |
| | Sections | - | - |
| | Bundle | 3,019 | 2,747 |

| COLORS | Reflectance | Stock | Stock |
|---------------|----------------|-----------|-----------|
| Dark Charcoal | SR n/a SRI n/a | SO | SO |
| Granite | SR n/a SRI n/a | | SO |
| Light Grey | SR .22 SRI 22 | | SO |
| Sandstone | SR n/a SRI n/a | | SO |

Single Unit

4 x 8
 100 x 200 x 70mm
 3 7/8 x 7 7/8 x 2 3/4"
 432 Units/Bundle
 .22 SqFt/Stone
SPECIAL ORDER

8 x 16
 200 x 400 x 70mm
 7 7/8 x 15 3/4 x 2 3/4"
 96 Units/Bundle
 .86 SqFt/Stone
SPECIAL ORDER

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Smooth
 Joint Spacing - 4 mm
 Void - n/a

TECHNOLOGIES


ENDURACOLOR™

Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits


LAYING PATTERNS



Mattoni RB_A



Mattoni HB_C




Mattoni DHB_D



COCOA BROWN



DARK CHARCOAL



GRANITE BLEND



SABLE BLEND

| | | STANDARD SMOOTH |
|--|----------------|-----------------|
| | Bundle Type | SINGLE |
| | Plant Produced | NEW YORK |
| | Thickness (mm) | 70 MM |

| | | |
|----------|----------|-------|
| SQFT PER | Bundle | 86.80 |
| | Layer | 10.85 |
| | Sections | - |
| | Stone | 0.16 |

| | | |
|------------|----------|------|
| PER BUNDLE | Layers | 8.00 |
| | Sections | - |

| | | |
|------------------|----------|--------|
| SOLDIER LNFT PER | SqFt | 1.27 |
| | Sections | - |
| | Layer | 13.78 |
| | Bundle | 110.23 |

| | | |
|-----------------|----------|--------|
| SAILOR LNFT PER | SqFt | 5.08 |
| | Sections | - |
| | Layer | 55.12 |
| | Bundle | 440.94 |

| | | |
|-----------|--------|--------|
| UNITS PER | SqFt | 6.45 |
| | Layer | 70.00 |
| | Bundle | 560.00 |

| | | |
|---------|----------|-------|
| LBS PER | Layer | 350 |
| | Sections | - |
| | Bundle | 2,797 |

| COLORS | Reflectance | Stock |
|---------------|----------------|-------|
| Cocoa Brown | SR n/a SRI n/a | ✓ |
| Dark Charcoal | SR n/a SRI n/a | ✓ |
| Granite Blend | SR n/a SRI n/a | ✓ |
| Sable | SR n/a SRI n/a | ✓ |

Single Unit



STANDARD

60 x 240 x 70mm
 2 3/8 x 9 1/2 x 2 3/4"
 560 Units/Bundle
 .16 SqFt/Stone

Natural Stone

NEW RANDOM BUNDLE



APPLICATIONS




APPEARANCE

Edge Detail - Zero
 Surface Texture - Brushed / Riven
 Joint Spacing - 3/8" (10 mm)
 Void - n/a

TECHNICAL INFORMATION

Visit Unilock.com for more information.

LAYING PATTERNS



NaturalStone_Fixed
 RB_R



GOLDEN SAND



HEARTHSTONE



STONE CLIFF GREY

| | | |
|-----------------------|--|--------------------|
| BRUSHED FINISH | | 4 PC BUNDLE |
| Bundle Type | | RANDOM |
| Thickness (mm) | | 38 MM |

| | | |
|-----------------|-------|--------|
| SQFT PER | Crate | 120.00 |
| | Units | 3.63 |

| | | |
|------------------|-------|-------|
| UNITS PER | Crate | 32.00 |
| | SqFt | 0.28 |

| | | |
|----------------|--------|-------|
| LBS PER | Unit | 47 |
| | Bundle | 2,508 |

| COLORS | Reflectance | Stock |
|------------------|----------------|-------|
| Golden Sand | SR n/a SRI n/a | ✓ |
| Hearthstone | SR n/a SRI n/a | ✓ |
| Stone Cliff Grey | SR n/a SRI n/a | ✓ |

4 Unit Random



12 x 24
 300 x 600 x 38mm
 11 7/8 x 23 5/8 x 1 1/2
 2.0 Sq.Ft./Stone



18 x 24
 450 x 600 x 38mm
 17 3/4 x 23 5/8 x 1 1/2
 3.0 Sq.Ft./Stone



24 x 24
 600 x 600 x 38mm
 23 5/8 x 23 5/8 x 1 1/2
 4.0 Sq.Ft./Stone



24 x 36
 600 x 900 x 38mm
 23 5/8 x 35 1/2 x 1 1/2
 6.0 Sq.Ft./Stone

Notes: This project pack must be installed with a 10 mm joint space between stones. This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.

Natural Stone - Sandstone Slabs



| BRUSHED FINISH | 12 x 24 | 18 x 24 | 24 x 24 | 24 x 36 |
|----------------|---------|---------|---------|---------|
| Bundle Type | SINGLE | SINGLE | SINGLE | SINGLE |
| Thickness (mm) | 22 MM | 22 MM | 22 MM | 22 MM |

| SQFT PER | Crate | 180.00 | 186.00 | 160.00 | 180.00 |
|----------|-------|--------|--------|--------|--------|
| | Units | 2.00 | 3.00 | 4.00 | 6.00 |

| UNITS PER | Crate | 90.00 | 62.00 | 40.00 | 30.00 |
|-----------|-------|-------|-------|-------|-------|
| | SqFt | 0.50 | 0.33 | 0.25 | 0.17 |

| LBS PER | Unit | 24 | 36 | 48 | 72 |
|---------|-------|-------|-------|-------|-------|
| | Crate | 2,149 | 2,221 | 1,910 | 2,149 |

| COLORS | Reflectance | Stock | Stock | Stock | Stock |
|--------------------------|----------------|-------|-------|-------|-------|
| Autumn Harvest (Riven) | SR n/a SRI n/a | ✓ | ✓ | ✓ | ✓ |
| Golden Sand (Brushed) | SR n/a SRI n/a | ✓ | ✓ | ✓ | ✓ |
| Ivory Sand (Brushed) | SR n/a SRI n/a | ✓ | ✓ | ✓ | ✓ |
| Stone Cliff Grey (Riven) | SR n/a SRI n/a | ✓ | ✓ | ✓ | ✓ |

APPLICATIONS



APPEARANCE

Edge Detail - Zero

Surface Texture - Brushed / Riven


Joint Spacing - 0 mm

Void - n/a


TECHNICAL INFORMATION

Visit Unilock.com for more information.


LAYING PATTERNS



NaturalStone
12x24 RB A



NaturalStone
Multi-Unit E



NaturalStone
Multi-Unit C




AUTUMN HARVEST



GOLDEN SAND



IVORY SAND



STONE CLIFF GREY

Single Units



12 x 24
300 x 600 x 22mm
11 7/8 x 23 5/8 x 7/8"
2.0 Sq.Ft./Stone



18 x 24
450 x 600 x 22mm
17 3/4 x 23 5/8 x 7/8"
3.0 Sq.Ft./Stone



24 x 24
600 x 600 x 22mm
23 5/8 x 23 5/8 x 7/8"
4.0 Sq.Ft./Stone



24 x 36
600 x 900 x 22mm
23 5/8 x 35 1/2 x 7/8"
6.0 Sq.Ft./Stone

Notes: This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.

Natural Stone - Sandstone Coping



APPLICATIONS



| | | 48 x 12 FULLNOSE COPING | 48 x 12 ROCK FACED COPING | 48 x 16 ROCK FACED COPING | 72 x 12 FULLNOSE COPING | 72 x 12 ROCK FACED COPING | 72 x 16 ROCK FACED COPING |
|--------------------|--|-------------------------------|---------------------------------|---------------------------------|-------------------------------|---------------------------------|---------------------------------|
| Bundle Type | | SINGLE | SINGLE | SINGLE | SINGLE | SINGLE | SINGLE |
| Thickness (mm) | | 50 MM | 50 MM | 50 MM | 50 MM | 50 MM | 50 MM |

| UNITS PER | Crate | 20.00 | 20.00 | 16.00 | 12.00 | 12.00 | 10.00 |
|-----------|-------|-------|-------|-------|-------|-------|-------|
| | SqFt | - | - | - | - | - | - |

| LBS PER | Unit | 101 | 106 | 113 | 159 | 159 | 209 |
|---------|-------|-------|-------|-------|-------|-------|-------|
| | Crate | 2,028 | 2,116 | 2,258 | 1,905 | 1,905 | 2,094 |

| COLORS | Reflectance | Stock | Stock | Stock | Stock | Stock |
|------------------|----------------|-------|-------|-------|-------|-------|
| Autumn Harvest | SR n/a SRI n/a | ✓ | ✓ | ✓ | ✓ | ✓ |
| Golden Sand | SR n/a SRI n/a | ✓ | ✓ | ✓ | ✓ | ✓ |
| Ivory Sand | SR n/a SRI n/a | ✓ | ✓ | ✓ | ✓ | ✓ |
| Stone Cliff Grey | SR n/a SRI n/a | ✓ | ✓ | ✓ | ✓ | ✓ |



AUTUMN HARVEST



GOLDEN SAND



IVORY SAND



STONE CLIFF GREY

Coping



4' FULLNOSE COPING
1,200 x 50 x 300mm
47 1/4 x 2 x 11 7/8"



6' FULLNOSE COPING
1,800 x 50 x 300mm
70 7/8 x 2 x 11 7/8"



4' ROCK FACE COPING
1,200 x 50 x 300mm
47 1/4 x 2 x 11 7/8"



6' ROCKFACE COPING
1,800 x 50 x 300mm
70 7/8 x 2 x 11 7/8"



4' ROCK FACE COPING
1,200 x 50 x 400mm
47 1/4 x 2 x 15 3/4"



6' ROCKFACE COPING
1,800 x 50 x 400mm
70 7/8 x 2 x 15 3/4"

Natural Stone - Sandstone Steps & Pillar Caps



| | 24 x 24 ROCK FACED PILLAR CAP | 28 x 28 ROCK FACED PILLAR CAP | 48 x 16 ROCK FACED STEP | 72 x 16 ROCK FACED STEP |
|-----------------------|-------------------------------------|-------------------------------------|-------------------------------|-------------------------------|
| Bundle Type | SINGLE | SINGLE | SINGLE | SINGLE |
| Thickness (mm) | 65 MM | 65 MM | 150 MM | 150 MM |

| | | | | | |
|-----------------|-------|---|---|-------|-------|
| FCFT PER | Crate | - | - | 32.00 | 32.00 |
|-----------------|-------|---|---|-------|-------|

| | | | | | |
|-----------------|-------|---|---|-------|-------|
| LNFT PER | Crate | - | - | 24.00 | 24.00 |
| | Unit | - | - | 4.00 | 6.00 |

| | | | | | |
|------------------|-------|-------|-------|------|------|
| UNITS PER | Crate | 14.00 | 12.00 | 6.00 | 4.00 |
|------------------|-------|-------|-------|------|------|

| | | | | | |
|----------------|-------|-------|-------|-------|-------|
| LBS PER | Unit | 137 | 209 | 421 | 628 |
| | Crate | 1,914 | 2,513 | 2,526 | 2,513 |

| COLORS | Reflectance | Stock | Stock | Stock | Stock |
|------------------|----------------|-------|-------|-------|-------|
| Autumn Harvest | SR n/a SRI n/a | ✓ | ✓ | ✓ | ✓ |
| Golden Sand | SR n/a SRI n/a | ✓ | ✓ | ✓ | ✓ |
| Ivory Sand | SR n/a SRI n/a | ✓ | ✓ | ✓ | ✓ |
| Stone Cliff Grey | SR n/a SRI n/a | ✓ | ✓ | ✓ | ✓ |

APPLICATIONS



APPEARANCE

Edge Detail - Zero

Surface Texture - Brushed / Ripen

Joint Spacing - 0 mm

Void - n/a

TECHNICAL INFORMATION

Visit Unilock.com for more information.



AUTUMN HARVEST



GOLDEN SAND



IVORY SAND



STONE CLIFF GREY



Notes: This product is not intended for vehicular applications. All measurements are nominal. Contact Unilock for more information.

Natural Stone - Limestone Slabs



| | 12 x 24 | 18 x 24 | 24 x 24 | 24 x 36 |
|--------------------|---------|---------|---------|---------|
| Bundle Type | SINGLE | SINGLE | SINGLE | SINGLE |
| Thickness (mm) | 22 MM | 22 MM | 22 MM | 22 MM |

| SQFT PER | Crate | 180.00 | 186.00 | 160.00 | 180.00 |
|----------|-------|--------|--------|--------|--------|
| | Units | 2.00 | 3.00 | 4.00 | 6.00 |

| UNITS PER | Crate | 90.00 | 62.00 | 40.00 | 30.00 |
|-----------|-------|-------|-------|-------|-------|
| | SqFt | 0.50 | 0.33 | 0.25 | 0.17 |

| LBS PER | Unit | 24 | 36 | 48 | 72 |
|---------|-------|-------|-------|-------|-------|
| | Crate | 2,149 | 2,221 | 1,910 | 2,149 |

| COLORS | Reflectance | Stock | Stock | Stock | Stock |
|-------------|----------------|-------|-------|-------|-------|
| Black River | SR n/a SRI n/a | ✓ | ✓ | ✓ | ✓ |
| Hearthstone | SR n/a SRI n/a | ✓ | ✓ | ✓ | ✓ |
| Winter Mist | SR n/a SRI n/a | ✓ | ✓ | ✓ | ✓ |

APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Riven
 Joint Spacing - 0 mm
 Void - 0 %

TECHNICAL INFORMATION

Visit Unilock.com for more information.




CONTRACTORS




COMMERCIAL


LAYING PATTERNS



NaturalStone
12x24 RB A



NaturalStone
Multi-Unit E



NaturalStone
Multi-Unit C



BLACK RIVER



HEARTHSTONE



WINTER MIST

| Single Units | 12 x 24 | 18 x 24 | 24 x 24 | 24 X 36 |
|--------------|--|--|--|--|
| | | | | |
| | 300 x 600 x 22mm 11 7/8 x 23 5/8 x 7/8" 2.0 Sq.Ft./Stone | 450 x 600 x 22mm 17 3/4 x 23 5/8 x 7/8" 3.0 Sq.Ft./Stone | 600 x 600 x 22mm 23 5/8 x 23 5/8 x 7/8" 4.0 Sq.Ft./Stone | 600 x 900 x 22mm 23 5/8 x 35 1/2 x 7/8" 6.0 Sq.Ft./Stone |

Notes: Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealer for natural stone. All measurement are nominal. Product is not intended for vehicular applications.

Natural Stone - Limestone Steps, Coping & Pillar Caps



APPLICATIONS



BLACK RIVER



HEARTHSTONE



WINTER MIST

| | 48 x 12 FULLNOSE COPING | 48 x 12 ROCKFACED COPING | 48 x 16 ROCK FACED COPING | 72 x 12 FULLNOSE COPING | 72 x 12 ROCK FACED COPING | 72 x 16 ROCK FACED COPING |
|--------------------|-------------------------------|--------------------------------|---------------------------------|-------------------------------|---------------------------------|---------------------------------|
| Bundle Type | SINGLE | SINGLE | SINGLE | SINGLE | SINGLE | SINGLE |
| Thickness (mm) | 50 MM | 50 MM | 50 MM | 50 MM | 50 MM | 50 MM |

| UNITS PER | Crate | 20.00 | 20.00 | 16.00 | 12.00 | 12.00 | 10.00 |
|-----------|-------|-------|-------|-------|-------|-------|-------|
| | SqFt | - | - | - | - | - | - |

| LBS PER | Unit | 159 | 106 | 141 | 159 | 159 | 209 |
|---------|-------|-------|-------|-------|-------|-------|-------|
| | Crate | 3,175 | 2,116 | 2,258 | 1,905 | 1,905 | 2,094 |

| COLORS | Reflectance | Stock | Stock | Stock | Stock | Stock | Stock |
|-------------|----------------|-------|-------|-------|-------|-------|-------|
| Black River | SR n/a SRI n/a | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

| | 24 x 24 ROCK FACED PILLAR CAP | 28 x 28 ROCK FACED PILLAR CAP | 48 x 16 ROCK FACED STEP | 72 x 16 ROCK FACED STEP |
|--------------------|-------------------------------------|-------------------------------------|-------------------------------|-------------------------------|
| Bundle Type | SINGLE | SINGLE | SINGLE | SINGLE |
| Thickness (mm) | 64 MM | 64 MM | 150 MM | 150 MM |

| FCFT PER | Crate | - | - | - | - |
|----------|-------|---|---|---|---|
|----------|-------|---|---|---|---|

| LNFT PER | Crate | - | - | 24.00 | 24.00 |
|----------|-------|---|---|-------|-------|
| | Unit | - | - | 4.00 | 6.00 |

| UNITS PER | Crate | 14.00 | 12.00 | 6.00 | 4.00 |
|-----------|-------|-------|-------|------|------|
|-----------|-------|-------|-------|------|------|

| LBS PER | Unit | 137 | 186 | 421 | 628 |
|---------|-------|-------|-------|-------|-------|
| | Crate | 1,914 | 2,606 | 2,526 | 2,513 |

| COLORS | Reflectance | Stock | Stock | Stock | Stock |
|-------------|----------------|-------|-------|-------|-------|
| Black River | SR n/a SRI n/a | ✓ | ✓ | ✓ | ✓ |
| Hearthstone | SR n/a SRI n/a | ✓ | ✓ | | |
| Winter Mist | SR n/a SRI n/a | ✓ | ✓ | | |

| | | | | |
|-----------------|---|---|--|--|
| 48" & 72" Steps |  | 48 x 16 STEP 1,200 x 150 x 400mm 47 1/4 x 5 7/8 x 15 3/4" |  | 72 x 16 STEP 1,800 x 150 x 400mm 70 7/8 x 5 7/8 x 15 3/4" |
| | Pillar Caps |  | 24" PILLAR CAP 600 x 600 x 64mm 23 5/8 x 23 5/8 x 2 5/8" |  |
| Coping | |  | 48 x 12 ROCK FACE 1,200 x 300 x 50mm 47 1/4 x 11 7/8 x 2" |  |
| |  | 48 x 16 ROCK FACE 400 x 1,200 x 50mm 47 1/4 x 15 3/4 x 2" |  | 72 x 16 ROCK FACE 1,800 x 400 x 50mm 47 1/4 x 15 3/4 x 2" |
| |  | 48 x 12 FULLNOSE 300 x 1,200 x 50mm 11 7/8 x 47 1/4 x 2" |  | 72 x 12 FULLNOSE 1,800 x 300 x 50mm 70 7/8 x 11 7/8 x 2" |

Notes: Due to natural oxidation, the Black River Limestone will require sealing to maintain its deep rich color. Unilock recommends a solvent-based sealers for natural stone. All measurements are nominal. Product is not intended for vehicular applications.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Textured
 Joint Spacing - 0 mm
 Void - n/a

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through


ENDURACOLOR™

Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1


LAYING PATTERNS



NordicCobble_A




NordicCobble_Fan




NordicCobble_Circle



GRANITE FUSION



DARK CHARCOAL



OPAL BLEND

| | |
|--------------------|-----------------|
| | STANDARD |
| Bundle Type | SINGLE |
| Plant Produced | ONTARIO |
| Thickness (mm) | 60 MM |

| | | |
|-----------------|----------|-------|
| SQFT PER | Bundle | 58.95 |
| | Layer | 9.83 |
| | Sections | - |
| | Stone | 0.05 |

| | | |
|-------------------|----------|------|
| PER BUNDLE | Layers | 6.00 |
| | Sections | - |

| | | |
|-------------------------|----------|--------|
| SOLDIER LNFT PER | SqFt | 3.39 |
| | Sections | - |
| | Layer | 33.31 |
| | Bundle | 199.84 |

| | | |
|------------------------|----------|---|
| SAILOR LNFT PER | SqFt | - |
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| | | |
|------------------|--------|--------|
| UNITS PER | SqFt | 10.99 |
| | Layer | 108.00 |
| | Bundle | 648.00 |

| | | |
|----------------|----------|-------|
| LBS PER | Layer | 270 |
| | Sections | - |
| | Bundle | 1,618 |

| COLORS | Reflectance | Stock |
|----------------|----------------|-------|
| Granite Fusion | SR n/a SRI n/a | ✓ |
| Dark Charcoal | SR n/a SRI n/a | ✓ |
| Opal Blend | SR n/a SRI n/a | ✓ |

Single Unit



STANDARD
 89.9 x 94 x 60mm
 3 5/8 x 3 3/4 x 2 3/8"
 648 units/Bundle
 .05 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
 Surface Texture - Smooth
 Joint Spacing - 8 mm
 Void - n/a

TECHNOLOGIES

CLASSIC

Budget-friendly traditional product mix


ENDURACOLOR™

Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Optiloc A



Optiloc B

| | | STANDARD |
|----------------|--|----------|
| Bundle Type | | SINGLE |
| Plant Produced | | UXB/NY |
| Thickness (mm) | | 80 MM |

| SQFT PER | Bundle | 67.66 |
|----------|----------|-------|
| | Layer | 9.67 |
| | Sections | - |
| | Stone | 0.54 |

| PER BUNDLE | Layers | 7.00 |
|------------|----------|------|
| | Sections | - |

| SOLDIER LNFT PER | SqFt | 1.59 |
|------------------|----------|--------|
| | Sections | - |
| | Layer | 15.35 |
| | Bundle | 107.48 |

| SAILOR LNFT PER | SqFt | 1.59 |
|-----------------|----------|--------|
| | Sections | - |
| | Layer | 15.35 |
| | Bundle | 107.48 |

| UNITS PER | SqFt | 1.86 |
|-----------|----------|--------|
| | Sections | - |
| | Bundle | 126.00 |

| LBS PER | Layer | 359 |
|---------|----------|-------|
| | Sections | - |
| | Bundle | 2,516 |

| COLORS | Reflectance | Stock |
|------------------------------|----------------|-------|
| Multiple Colors and Finishes | SR n/a SRI n/a | SO |

Single Unit



STANDARD
 260 x 260 x 80mm
 10¼ x 10¼ x 3 ⅙"
 126 units/Bundle
 .54 Sq.Ft./Stone

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.

Porcelain



APPLICATIONS



APPEARANCE

Edge Detail - n/a

Surface Texture - Stone Finish


Joint Spacing - n/a

Void - n/a


TECHNICAL INFORMATION

Visit Unilock.com for more information.

LAYING PATTERNS



Porcelain 24x24
RB_A



Porcelain 16x32
HB_D

| | | DEL CONCA 24 x 24 PRESSED EDGE | DEL CONCA 16 x 32 PRESSED EDGE |
|----------------|--------|-----------------------------------|-----------------------------------|
| Bundle Type | | SINGLE | SINGLE |
| Thickness (mm) | | 20 MM | 20 MM |
| SQFT PER | Pallet | 248 | 165 |
| | Box | 7.75 | 6.89 |
| | Unit | 3.88 | 3.45 |
| PER PALLET | Box | 32.00 | 24.00 |
| | SqFt | 248.00 | 165.71 |
| | Unit | 64.00 | 48.00 |
| UNITS PER | Pallet | 64.00 | 48.00 |
| | Box | 2.00 | 2.00 |
| LBS PER | Unit | 36 | 32 |
| | SqFt | 9 | 9 |
| | Box | 72 | 64 |
| | Pallet | 2,277 | 1,538 |

| COLORS | Reflectance | Stock | Stock |
|-----------------------|----------------|-------|-------|
| Gotham Grey | SR n/a SRI n/a | ✓ | |
| Gotham Nero | SR n/a SRI n/a | ✓ | |
| Gotham Bianco | SR n/a SRI n/a | ✓ | |
| Nature Carrara | SR n/a SRI n/a | ✓ | |
| Nature Dolomite | SR n/a SRI n/a | ✓ | |
| New England White | SR n/a SRI n/a | ✓ | ✓ |
| New England Ivory | SR n/a SRI n/a | ✓ | ✓ |
| New England Cold Gray | SR n/a SRI n/a | ✓ | ✓ |
| Travstone Beige | SR n/a SRI n/a | ✓ | ✓ |
| Travstone Gray | SR n/a SRI n/a | ✓ | ✓ |
| Quartzite Dark Gray | SR n/a SRI n/a | | ✓ |
| Quartzite Sand | SR n/a SRI n/a | | ✓ |



GOTHAM GREY



GOTHAM NERO



GOTHAM BIANCO



NATURE CARRARA



NATURE DOLOMITE



NEW ENGLAND WHITE



NEW ENGLAND IVORY




NEW ENGLAND COLD GRAY



TRAVSTONE BEIGE



TRAVSTONE GRAY



QUARTZITE DARK GRAY



QUARTZITE SAND

Single Units



DEL CONCA 24 x 24
600 x 600 x 20mm
23⁵/₈ x 23⁵/₈ x 3/4"
3.88 Sq.Ft./Stone



DEL CONCA 16 x 32
400 x 800 x 20mm
15 3/4 x 31 1/2 x 3/4"
3.45 Sq.Ft./Stone

Notes: All measurements are nominal. Contact Unilock for more information. Porcelain tile is not covered by Unilock's Lifetime Guarantee. Please contact your Territory Manager for more information. Product is not intended for vehicular applications.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth, Series™ Exposed,
 Il Campo Brushed
 Joint Spacing - 4 mm
 Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ (Umbriano)

Factory Sealed to provide integral stain resistance

COLOR FUSION™ (Umbriano)

Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

| | 3 x 12 | 4 x 12 | 4 x 16 | 8 x 24 |
|--------------------|----------|----------|----------|----------|
| Bundle Type | SINGLE | SINGLE | SINGLE | SINGLE |
| Plant Produced | NEW YORK | NEW YORK | NEW YORK | NEW YORK |
| Thickness (mm) | 100 MM | 100 MM | 100 MM | 100 MM |

| SQFT PER | Bundle | 63.94 | 69.76 | 62.00 | 62.00 |
|----------|----------|-------|-------|-------|-------|
| | Layer | 10.66 | 11.63 | 10.33 | 10.33 |
| | Sections | - | - | - | - |
| | Stone | 0.24 | 0.32 | 0.43 | 1.29 |

| PER BUNDLE | Layers | 6.00 | 6.00 | 6.00 | 6.00 |
|------------|----------|------|------|------|------|
| | Sections | - | - | - | - |

| SOLDIER LNFT PER | SqFt | 1.35 | 1.02 | 0.76 | 0.51 |
|------------------|----------|-------|-------|-------|-------|
| | Sections | - | - | - | - |
| | Layer | 14.44 | 11.81 | 7.87 | 5.25 |
| | Bundle | 86.61 | 70.87 | 47.24 | 31.50 |

| SAILOR LNFT PER | SqFt | 4.06 | 3.05 | 3.05 | 1.52 |
|-----------------|----------|--------|--------|--------|-------|
| | Sections | - | - | - | - |
| | Layer | 43.31 | 35.43 | 31.50 | 15.75 |
| | Bundle | 259.84 | 212.60 | 188.98 | 94.49 |


| UNITS PER | SqFt | 4.13 | 3.10 | 2.32 | 0.77 |
|-----------|--------|--------|--------|--------|-------|
| | Layer | 44.00 | 36.00 | 24.00 | 8.00 |
| | Bundle | 264.00 | 216.00 | 144.00 | 48.00 |

| LBS PER | Layer | 483 | 532 | 455 | 478 |
|---------|----------|-------|-------|-------|-------|
| | Sections | - | - | - | - |
| | Bundle | 2,898 | 3,191 | 2,730 | 2,869 |


| COLORS | Reflectance | Stock | Stock | Stock | Stock |
|------------------------------|----------------|-------|-------|-------|-------|
| Multiple Colors and Finishes | SR n/a SRI n/a | SO | SO | SO | SO |

Multiple finishes available by Special Order.
 Please contact your Territory Manager for more details.


LAYING PATTERNS




Promenade Multi-Unit Random G




Promenade 4x12 HB_I



Promenade 4x12 RB_H



Promenade 4x16 HB_C



Promenade 8x24 RB_D

| Single Units | 3 x 12 | 4 x 12 | 4 x 16 | 8 x 24 |
|--------------|---|--|--|--|
| | | | | |
| | 75 x 300 x 100mm 3 x 11 7/8 x 3 7/8" 264 units/Bundle .24 Sq.Ft./Stone | 100 x 300 x 100mm 3 7/8 x 11 7/8 x 3 7/8" 216 units/Bundle .32 Sq.Ft./Stone | 100 x 400 x 100mm 3 7/8 x 15 3/4 x 3 7/8" 144 units/Bundle .43 Sq.Ft./Stone | 200 x 600 x 100mm 7 7/8 x 23 3/8 x 3 7/8" 48 units/Bundle 1.29 Sq.Ft./Stone |

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture,
 Smooth & Series™ Exposed, Umbriano Mottled
 Joint Spacing - 4 mm

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

EASYCLEAN™ (Umbriano)

Factory Sealed to provide integral stain resistance

COLOR FUSION™ (Umbriano)

Subtly mottled color finish

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

| | 4 x 12 | 6 x 24 | 8 x 24 |
|--------------------|---------------|---------------|---------------|
| Bundle Type | SINGLE | SINGLE | SINGLE |
| Plant Produced | NEW YORK | NEW YORK | NEW YORK |
| Thickness (mm) | 70 MM | 70 MM | 70 MM |

| SQFT PER | Bundle | 93.04 | 93.00 | 82.67 |
|-----------------|----------|-------|-------|-------|
| | Layer | 11.63 | 11.63 | 10.33 |
| | Sections | - | - | - |
| | Stone | 0.32 | 0.97 | 1.29 |

| PER BUNDLE | Layers | 8.00 | 8.00 | 8.00 |
|-------------------|----------|------|------|------|
| | Sections | - | - | - |

| SOLDIER LNFT PER | SqFt | 1.02 | 0.51 | 0.51 |
|-------------------------|----------|-------|-------|-------|
| | Sections | - | - | - |
| | Layer | 11.81 | 5.91 | 5.25 |
| | Bundle | 94.49 | 47.24 | 41.99 |

| SAILOR LNFT PER | SqFt | 3.05 | 2.03 | 1.02 |
|------------------------|----------|--------|--------|-------|
| | Sections | - | - | - |
| | Layer | 35.43 | 23.62 | 10.50 |
| | Bundle | 283.46 | 188.98 | 83.99 |


| UNITS PER | SqFt | 3.10 | 1.03 | 0.77 |
|------------------|--------|--------|-------|-------|
| | Layer | 36.00 | 12.00 | 8.00 |
| | Bundle | 288.00 | 96.00 | 64.00 |

| LBS PER | Layer | 393 | 372 | 331 |
|----------------|----------|-------|-------|-------|
| | Sections | - | - | - |
| | Bundle | 3,140 | 2,977 | 2,647 |


| COLORS | Reflectance | Stock | Stock | Stock |
|------------------------------|----------------|-------|-------|-------|
| Multiple Colors and Finishes | SR n/a SRI n/a | SO | SO | SO |

Multiple finishes available by Special Order.
 Please contact your Territory Manager for more details.


LAYING PATTERNS




Promenade Multi-Unit Random G



Promenade 4x12 HB_I



Promenade 4x12 RB_H



Promenade 8x24 RB_D



COMMERCIAL

| | | | | | | |
|---------------------|---|--|---|---|---|--|
| Single Units |  | 4 x 12 100 x 300 x 70mm 3 7/8 x 11 7/8 x 2 3/4" 288 units/Bundle .32 Sq.Ft./Stone |  | 6 x 24 150 x 600 x 70mm 5 7/8 x 23 5/8 x 2 3/4" 96 units/Bundle .97 Sq.Ft./Stone |  | 8 x 24 200 x 600 x 70mm 7 7/8 x 23 5/8 x 2 3/4" 64 units/Bundle 1.29 Sq.Ft./Stone |
|---------------------|---|--|---|---|---|--|

Notes: **Special Order - Lead time required.** Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - n/a
 Void - n/a

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

ECOTERRA®
 Reduced carbon emissions and refined surface protection

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

| | |
|--------------------|---------------|
| | 4 x 12 |
| Bundle Type | SINGLE |
| Plant Produced | ONTARIO |
| Thickness (mm) | 70 MM |

| | | |
|-----------------|---------|-------|
| SQFT PER | Bundle | 93.04 |
| | Layer | 11.63 |
| | Section | 23.26 |
| | Stone | 0.32 |

| | | |
|-------------------|----------|------|
| PER BUNDLE | Layers | 8.00 |
| | Sections | 4.00 |

| | | |
|-------------------------|---------|-------|
| SOLDIER LNFT PER | SqFt | 1.02 |
| | Section | 23.62 |
| | Layer | 11.81 |
| | Bundle | 94.49 |


| | | |
|------------------------|---------|--------|
| SAILOR LNFT PER | SqFt | 3.05 |
| | Section | 70.87 |
| | Layer | 35.43 |
| | Bundle | 283.46 |

| | | |
|------------------|--------|--------|
| UNITS PER | SqFt | 3.10 |
| | Layer | 36.00 |
| | Bundle | 288.00 |


| | | |
|----------------|---------|-------|
| LBS PER | Layer | 393 |
| | Section | 785 |
| | Bundle | 3,140 |

| COLORS | Reflectance | Stock |
|------------------|----------------|-----------|
| Light Opal Blend | SR n/a SRI n/a | SO |
| Light Steel Gray | SR n/a SRI n/a | SO |

LAYING PATTERNS



4x12 RB_A



4x12 HB_C



LIGHT OPAL BLEND



LIGHT STEEL GRAY

Single Unit



4 x 12
 100 x 300 x 70 mm
 3⁷/₈ x 11⁷/₈ x 2³/₄
 288 units/Bundle
 .32 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - 4mm
 Void - n/a

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

| | 4 x 8 | 8 x 24 |
|--------------------|---------------|---------------|
| Bundle Type | SINGLE | SINGLE |
| Plant Produced | UXBRIDGE | UXBRIDGE |
| Thickness (mm) | 70 MM | 70 MM |

| SQFT PER | Bundle | 94.40 | 82.67 |
|----------|----------|-------|-------|
| | Layer | 11.80 | 10.33 |
| | Sections | - | - |
| | Stone | 0.22 | 1.29 |

| PER BUNDLE | Layers | 8.00 | 8.00 |
|------------|----------|------|------|
| | Sections | - | - |

| SOLDIER LNFT PER | SqFt | 1.50 | 0.51 |
|------------------|----------|--------|-------|
| | Sections | - | - |
| | Layer | 17.72 | 5.25 |
| | Bundle | 141.73 | 41.99 |


| SAILOR LNFT PER | SqFt | 3.00 | 1.02 |
|-----------------|----------|--------|-------|
| | Sections | - | - |
| | Layer | 35.43 | 10.50 |
| | Bundle | 283.46 | 83.99 |

| UNITS PER | SqFt | 4.58 | 0.77 |
|-----------|--------|--------|-------|
| | Layer | 54.00 | 8.00 |
| | Bundle | 432.00 | 64.00 |


| LBS PER | Layer | 334 | 331 |
|---------|----------|-------|-------|
| | Sections | - | - |
| | Bundle | 2,669 | 2,647 |

| COLORS | Reflectance | Stock | Stock |
|---------------|----------------|-------|-------|
| Dark Charcoal | SR n/a SRI n/a | ✓ | |
| Tuscany | SR n/a SRI n/a | ✓ | ✓ |

LAYING PATTERNS



Revela 4x8 HB



Revela 8x24 RB



DARK CHARCOAL



TUSCANY

Single Units



4 x 8
 100 x 200 x 70mm
 3⁷/₈ x 7⁷/₈ x 2³/₄"
 432 units/Bundle
 .22 Sq.Ft./Stone



8 x 24
 200 x 600 x 70mm
 7⁷/₈ x 23³/₈ x 2³/₄"
 64 units/Bundle
 1.29 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - n/a
 Void - n/a

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Revela_18x24
 RB_A



Revela_18x24
 SB_B




FROST



MICA GREY



METTALIC GREY



DARK CHARCOAL



SAVANNAH

| | |
|--------------------|----------------|
| | 18 x 24 |
| Bundle Type | SINGLE |
| Plant Produced | UXBRIDGE |
| Thickness (mm) | 60 MM |

| | | |
|-----------------|----------|-------|
| SQFT PER | Bundle | 93.00 |
| | Layer | 11.63 |
| | Sections | - |
| | Stone | 2.91 |

| | | |
|-------------------|----------|------|
| PER BUNDLE | Layers | 8.00 |
| | Sections | - |

| | | |
|-------------------------|----------|-------|
| SOLDIER LNFT PER | SqFt | 0.51 |
| | Sections | - |
| | Layer | 5.91 |
| | Bundle | 47.25 |

| | | |
|------------------------|----------|-------|
| SAILOR LNFT PER | SqFt | 0.68 |
| | Sections | - |
| | Layer | 7.87 |
| | Bundle | 62.99 |

| | | |
|------------------|--------|-------|
| UNITS PER | SqFt | 0.34 |
| | Layer | 4.00 |
| | Bundle | 32.00 |

| | | |
|----------------|--------|-------|
| LBS PER | Unit | 80 |
| | Layer | 319 |
| | Bundle | 2,552 |

| COLORS | Reflectance | Stock |
|---------------|----------------|-------|
| Frost | SR n/a SRI n/a | ✓ |
| Mica Grey | SR n/a SRI n/a | ✓ |
| Metallic Grey | SR n/a SRI n/a | ✓ |
| Dark Charcoal | SR n/a SRI n/a | ✓ |
| Savannah | SR n/a SRI n/a | ✓ |

Single Units



18 x 24
 450 x 600 x 60mm
 17¾ x 23⅝ x 2⅜"
 32 units/Bundle
 2.91 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - n/a
 Surface Texture - Textured
 Joint Spacing - 10 mm
 Void - n/a

TECHNOLOGIES

ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

EASYCLEAN™



Factory Sealed to provide integral stain resistance

REALA™

Cast from natural stone


ULTIMA™

Up to 4x stronger than poured-in-place concrete


TECHNICAL INFORMATION

Conforms to ASTM C 936 - Eligible for LEED v4.1

LAYING PATTERNS



Richcliff Fixed Random A



Richcliff Fixed Random B

| | | LARGE RECTANGLE | |
|----------------|--|-----------------|--------|
| Bundle Type | | RANDOM | SINGLE |
| Plant Produced | | AYR | AYR |
| Thickness (mm) | | 60 MM | 60 MM |

| SQFT PER | Bundle | 90.30 | 82.39 |
|----------|----------|-------|-------|
| | Layer | 11.29 | 10.30 |
| | Sections | - | - |
| | Stone | 0.56 | 1.72 |

| PER BUNDLE | Layers | 8.00 | 8.00 |
|------------|----------|------|------|
| | Sections | - | - |

| SOLDIER LNFT PER | SqFt | - | 0.58 |
|------------------|----------|---|-------|
| | Sections | - | - |
| | Layer | - | 5.94 |
| | Bundle | - | 47.56 |

| SAILOR LNFT PER | SqFt | 1.31 | 1.01 |
|-----------------|----------|--------|-------|
| | Sections | - | - |
| | Layer | 14.78 | 10.39 |
| | Bundle | 118.22 | 83.15 |

| UNITS PER | SqFt | 1.77 | 0.58 |
|-----------|--------|--------|-------|
| | Layer | 20.00 | 6.00 |
| | Bundle | 160.00 | 48.00 |

| LBS PER | Layer | 309 | 301 |
|---------|----------|-------|-------|
| | Sections | - | - |
| | Bundle | 2,472 | 2,411 |

| COLORS | Reflectance | Stock | Stock |
|--------------|----------------|-------|-------|
| Dawn Mist | SR n/a SRI n/a | ✓ | ✓ |
| Pebble Taupe | SR n/a SRI n/a | ✓ | ✓ |
| Smoke Shale | SR n/a SRI n/a | ✓ | ✓ |



DAWN MIST



PEBBLE TAUPE



SMOKE SHALE

| | | | | | | | | | |
|----------------------|--|--|--|--|--|---|-------------|--|--|
| 3 Unit Random Bundle | | RECTANGLE 226 x 300 x 60mm 8 7/8 x 11 7/8 x 2 3/8" 64 Units/Bundle .75 SqFt/Stone | | SQUARE 226 x 226 x 60mm 8 7/8 x 8 7/8 x 2 3/8" 32 units/Bundle .58 Sq.Ft./Stone | | SMALL RECTANGLE 150 x 226 x 60mm 5 7/8 x 8 7/8 x 2 3/8" 64 units/Bundle .38 Sq.Ft./Stone | Single Unit | | LARGE RECTANGLE 302 x 528 x 60mm 11 7/8 x 20 7/8 x 2 3/8" 48 units/Bundle 1.72 Sq.Ft./Stone |
|----------------------|--|--|--|--|--|---|-------------|--|--|

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Chamfer
 Surface Texture - Series Exposed
 Joint Spacing -3 mm
 Void - n/a


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits


LAYING PATTERNS



Series Fixed
Random A



Series Fixed
Random B



Series 4x8 HB_G



BLACK GRANITE



PEPPERED GRANITE

| | | | |
|--------------------|---------------|--|---------------|
| | | | 4 x 8 |
| Bundle Type | RANDOM | | SINGLE |
| Plant Produced | NEW YORK | | NEW YORK |
| Thickness (mm) | 60 MM | | 70 MM |

| | | | |
|-----------------|----------|--------|------|
| SQFT PER | Bundle | 104.60 | 94.4 |
| | Layer | 10.46 | 11.8 |
| | Sections | - | - |
| | Stone | 1.31 | 1.31 |

| | | | |
|-------------------|----------|-------|------|
| PER BUNDLE | Layers | 10.00 | 8.00 |
| | Sections | - | - |

| | | | |
|-------------------------|----------|---|--------|
| SOLDIER LNFT PER | SqFt | - | 1.50 |
| | Sections | - | - |
| | Layer | - | 17.72 |
| | Bundle | - | 141.76 |

| | | | |
|------------------------|----------|-------|-------|
| SAILOR LNFT PER | SqFt | 0.85 | 0.85 |
| | Sections | - | - |
| | Layer | 8.86 | 8.86 |
| | Bundle | 88.58 | 88.58 |

| | | | |
|------------------|--------|-------|--------|
| UNITS PER | SqFt | 0.76 | 4.58 |
| | Layer | 8.00 | 54.00 |
| | Bundle | 80.00 | 432.00 |

| | | | |
|----------------|----------|-------|-------|
| LBS PER | Layer | 296 | 377 |
| | Sections | - | - |
| | Bundle | 2,960 | 2,953 |

| COLORS | Reflectance | Stock | Stock |
|------------------|----------------|-----------|-------|
| Black Granite | SR n/a SRI n/a | | ✓ |
| Peppered Granite | SR .38 SRI 42 | SO | |

| | | | | | | | | | |
|---------------|--|--|--|---|--|--|-------------|--|--|
| Random Bundle | | LARGE RECTANGLE 360 x 540 x 60mm 14 1/4 x 21 1/4 x 2 3/8" 20 units/Bundle 2.08 Sq.Ft./Stone | | SQUARE 360 x 360 x 60mm 14 1/4 x 14 1/4 x 2 3/8" 30 units/Bundle 1.39 Sq.Ft./Stone | | SMALL RECTANGLE 180 x 360 x 60mm 7 x 14 1/4 x 2 3/8" 30 units/Bundle .69 Sq.Ft./Stone | Single Unit | | 4 x 8 100 x 200 x 70mm 3 7/8 x 7 7/8 x 2 3/4" 432 units/Bundle .22 Sq.Ft./Stone |
|---------------|--|--|--|---|--|--|-------------|--|--|

Notes: For Special Order items - Lead time required. Minimum quantities apply. **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - 2mm
 Void - n/a

TECHNOLOGIES


ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 1782
 Eligible for LEED v4.1 credits

LAYING PATTERNS




Skyline 24x24 SB_A



Skyline 24x24 RB_B



CHAMOIS



SILVER GREY

| | |
|--------------------|----------------|
| | 24 x 24 |
| Bundle Type | SINGLE |
| Plant Produced | NEW YORK |
| Thickness (mm) | 60 MM |

| | | |
|-----------------|----------|-------|
| SQFT PER | Bundle | 77.50 |
| | Layer | 7.75 |
| | Sections | - |
| | Stone | 3.88 |

| | | |
|-------------------|----------|-------|
| PER BUNDLE | Layers | 10.00 |
| | Sections | - |

| | | |
|-------------------------|----------|---|
| SOLDIER LNFT PER | SqFt | - |
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| | | |
|------------------------|----------|---|
| SAILOR LNFT PER | SqFt | - |
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| | | |
|------------------|--------|-------|
| UNITS PER | SqFt | 0.26 |
| | Layer | 2.00 |
| | Bundle | 20.00 |

| | | |
|----------------|----------|-------|
| LBS PER | Layer | 211 |
| | Sections | - |
| | Bundle | 2,113 |

| COLORS | Reflectance | Stock |
|-------------|----------------|-------|
| Chamois | SR .41 SRI 46 | ✓ |
| Silver Grey | SR n/a SRI n/a | ✓ |

Single Unit



24 x 24
 600 x 600 x 60mm
 23 5/8 x 23 5/8 x 2 3/8"
 20 units/Bundle
 3.88 Sq.Ft./Stone



PEDESTAL SYSTEM

Contact your local Unilock Rep for more information.

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Product is not intended vehicular applications.** Unilock offers adjustable and stackable pedestal systems; please contact your Territory Manager for pricing and availability. All measurements are nominal.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Smooth
 Joint Spacing - 0 mm
 Void - n/a

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color


EASYCLEAN™

Factory Sealed to provide integral stain resistance


TECHNICAL INFORMATION

Conforms to ASTM C 1782
 Eligible for LEED v4.1

LAYING PATTERN



Soreno 16x32 RB_A



Soreno 16x32 HB_B



LIGHT GRANITE



TOSCANA BEIGE

| | | |
|--|--------------------|----------------|
| | | 16 x 32 |
| | Bundle Type | SINGLE |
| | Plant Produced | CHICAGO |
| | Thickness (mm) | 50 MM |

| | | |
|-----------------|----------|-------|
| SQFT PER | Bundle | 64.27 |
| | Layer | 3.57 |
| | Sections | - |
| | Stone | 3.57 |

| | | |
|-------------------|----------|-------|
| PER BUNDLE | Layers | 18.00 |
| | Sections | - |

| | | |
|-------------------------|----------|-------|
| SOLDIER LNFT PER | SqFt | 0.37 |
| | Sections | - |
| | Layer | 1.34 |
| | Bundle | 24.04 |

| | | |
|------------------------|----------|-------|
| SAILOR LNFT PER | SqFt | 0.75 |
| | Sections | - |
| | Layer | 2.67 |
| | Bundle | 48.13 |

| | | |
|------------------|----------|-------|
| UNITS PER | SqFt | 0.28 |
| | Sections | - |
| | Bundle | 18.00 |

| | | |
|----------------|----------|-------|
| LBS PER | Layer | 86 |
| | Sections | - |
| | Bundle | 1,550 |

| COLORS | Reflectance | Stock |
|---------------|----------------|-----------|
| Light Granite | SR n/a SRI n/a | SO |
| Toscana Beige | SR n/a SRI n/a | SO |

Single Units

16 x 32
 407 x 815 x 50mm
 16 x 32 x 2"
 18 units/Bundle
 3.57 Sq.Ft./Stone



PEDESTAL SYSTEM
 Contact your local Unilock Rep for more information.

Notes: Special Order items, lead time is required. Minimum quantities apply. SOLD IN FULL BUNDLES ONLY and is produced and sold on a required, refundable skid. This product is not intended for vehicular applications. Important: A urethane rubber paver mat must be used to prevent scuffing when compacting. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - 11-18 mm
 Void - 4.4%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

| Bundle Type | RANDOM |
|----------------|----------|
| Plant Produced | UXBRIDGE |
| Thickness (mm) | 70 MM |

| SQFT PER | Bundle | 88.61 |
|----------|----------|-------|
| | Layer | 11.08 |
| | Sections | - |
| | Stone | - |

| PER BUNDLE | Layers | 8.00 |
|------------|----------|------|
| | Sections | - |

| SOLDIER LNFT PER | SqFt | - |
|------------------|----------|---|
| | Sections | - |
| | Layer | - |
| | Bundle | - |


| SAILOR LNFT PER | SqFt | - |
|-----------------|----------|---|
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| UNITS PER | SqFt | - |
|-----------|--------|-------|
| | Layer | 12.00 |
| | Bundle | 96.00 |


| LBS PER | Layer | 355 |
|---------|----------|-------|
| | Sections | - |
| | Bundle | 2,838 |

| COLORS | Reflectance | Stock |
|----------------|---------------|-------|
| Fossil | SR .22 SRI 21 | ✓ |
| Steel Mountain | SR .30 SRI 31 | ✓ |


LAYING PATTERNS



Thornbury Fixed Random A.



Thornbury Fixed Random B



Thornbury Fixed Random C



FOSSIL



STEEL MOUNTAIN

3 Unit Random Bundle



LARGE RECTANGLE
 350 x 420 x 70mm
 13 7/8 x 16 5/8 x 2 3/4"
 32 Units/Bundle
 1.58 Sq.Ft./Stone



MEDIUM RECTANGLE
 210 x 350 x 70mm
 8 3/8 x 13 7/8 x 2 3/4"
 32 units/Bundle
 0.79 Sq.Ft./Stone



SMALL RECTANGLE
 173 x 210 x 70mm
 6 7/8 x 8 3/8 x 2 3/4"
 32 units/Bundle
 .39 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - n/a
 Surface Texture - Textured
 Joint Spacing - 10 mm
 Void - 6.5%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ELEGANCE™

Timeless, long-lasting beauty with the combination of Reala and Ultima technologies

EASYCLEAN™ 

Factory Sealed to provide integral stain resistance

REALA™

Cast from historical brick


ULTIMA™

Up to 4x stronger than poured-in-place concrete


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



TownHall 4x10 DHB_D



TownHall 4x10 HB_B



BURGUNDY RED



BURNT CLAY



OLD OAK



BASALT

| | |
|--------------------|-----------------|
| | STANDARD |
| Bundle Type | SINGLE |
| Plant Produced | ONTARIO |
| Thickness (mm) | 70 MM |

| | | |
|-----------------|----------|-------|
| SQFT PER | Bundle | 88.41 |
| | Layer | 11.05 |
| | Sections | - |
| | Stone | 0.28 |

| | | |
|-------------------|----------|------|
| PER BUNDLE | Layers | 8.00 |
| | Sections | - |

| | | |
|-------------------------|----------|--------|
| SOLDIER LNFT PER | SqFt | 1.19 |
| | Sections | - |
| | Layer | 13.12 |
| | Bundle | 104.99 |

| | | |
|------------------------|----------|--------|
| SAILOR LNFT PER | SqFt | 2.97 |
| | Sections | - |
| | Layer | 32.81 |
| | Bundle | 262.47 |

| | | |
|------------------|--------|--------|
| UNITS PER | SqFt | 3.62 |
| | Layer | 40.00 |
| | Bundle | 320.00 |

| | | |
|----------------|--------|--------|
| LBS PER | Unit | 9 |
| | Layer | 361.00 |
| | Bundle | 2,888 |

| COLORS | Reflectance | Stock |
|--------------|----------------|-------|
| Burgundy Red | SR .35 SRI 38 | ✓ |
| Burnt Clay | SR .36 SRI 40 | ✓ |
| Old Oak | SR .37 SRI 41 | ✓ |
| Basalt | SR n/a SRI n/a | ✓ |

Single Unit



STANDARD
 250 x 100 x 70mm
 9 7/8 x 3 7/8 x 2 3/4"
 320 units/Bundle
 .28 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Textured
 Joint Spacing - 3 mm
 Void - n/a


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Transition 6x9
HB_D



Transition 6x9
RB_C



ALMOND GROVE



DARK CHARCOAL



FOSSIL



SIERRA



STEEL MOUNTAIN



WALNUT

| | |
|--------------------|------------------|
| | RECTANGLE |
| Bundle Type | SINGLE |
| Plant Produced | NEW YORK |
| Thickness (mm) | 60 MM |

| | | |
|-----------------|----------|--------|
| SQFT PER | Bundle | 125.00 |
| | Layer | 12.50 |
| | Sections | - |
| | Stone | 0.42 |

| | | |
|-------------------|----------|-------|
| PER BUNDLE | Layers | 10.00 |
| | Sections | - |

| | | |
|-------------------------|----------|--------|
| SOLDIER LNFT PER | SqFt | 1.18 |
| | Sections | - |
| | Layer | 14.76 |
| | Bundle | 147.64 |

| | | |
|------------------------|----------|--------|
| SAILOR LNFT PER | SqFt | 1.81 |
| | Sections | - |
| | Layer | 22.64 |
| | Bundle | 226.38 |

| | | |
|------------------|--------|--------|
| UNITS PER | SqFt | 2.40 |
| | Layer | 30.00 |
| | Bundle | 300.00 |

| | | |
|----------------|--------|--------|
| LBS PER | Unit | 12 |
| | Layer | 350.00 |
| | Bundle | 3,500 |

| COLORS | Reflectance | Stock |
|----------------|----------------|-------|
| Almond Grove | SR .25 SRI 25 | ✓ |
| Dark Charcoal | SR n/a SRI n/a | ✓ |
| Fossil | SR .22 SRI 21 | ✓ |
| Sierra | SR n/a SRI n/a | ✓ |
| Steel Mountain | SR .30 SRI 32 | ✓ |
| Walnut | SR n/a SRI n/a | ✓ |

Single Unit



RECTANGLE
 150 x 230 x 60mm
 5 7/8" x 9 x 2 3/8"
 300 Units/Bundle
 .42 SqFt/Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting.** All measurements are nominal. Contact Unilock for more information.



| | | SMALL RECTANGLE | |
|----------------|--|-----------------|----------|
| Bundle Type | | RANDOM | SINGLE |
| Plant Produced | | NEW YORK | NEW YORK |
| Thickness (mm) | | 60 MM | 60 MM |

| SQFT PER | Bundle | 118.99 | 118.90 |
|----------|----------|--------|--------|
| | Layer | 11.89 | 11.89 |
| | Sections | - | - |
| | Stone | 0.44 | 0.30 |

| PER BUNDLE | Layers | 10.00 | 10.00 |
|------------|----------|-------|-------|
| | Sections | - | - |

| SOLDIER LNFT PER | SqFt | - | 1.30 |
|------------------|----------|---|--------|
| | Sections | - | - |
| | Layer | - | 15.42 |
| | Bundle | - | 154.20 |

| SAILOR LNFT PER | SqFt | - | 2.59 |
|-----------------|----------|---|--------|
| | Sections | - | - |
| | Layer | - | 30.84 |
| | Bundle | - | 308.40 |

| UNITS PER | SqFt | 2.29 | 3.36 |
|-----------|----------|--------|--------|
| | Sections | - | - |
| | Bundle | 250.00 | 400.00 |

| LBS PER | Layer | 349 | 349 |
|---------|----------|-------|-------|
| | Sections | - | - |
| | Bundle | 3,485 | 3,485 |

| COLORS | Reflectance | Stock | Stock |
|----------------|----------------|-------|-------|
| Almond Grove | SR .25 SRI 25 | ✓ | ✓ |
| Brown | SR n/a SRI n/a | | ✓ |
| Dark Charcoal | SR n/a SRI n/a | | ✓ |
| Fossil | SR .22 SRI 21 | ✓ | ✓ |
| Sierra | SR n/a SRI n/a | ✓ | ✓ |
| Slate | SR n/a SRI n/a | ✓ | ✓ |
| Steel Mountain | SR .30 SRI 31 | ✓ | ✓ |
| Tuscany | SR .30 SRI 32 | ✓ | ✓ |
| Walnut | SR n/a SRI n/a | ✓ | ✓ |

APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Textured
 Joint Spacing - 4mm
 Void - n/a


TECHNOLOGIES

ENDURACOLOR™ (FLAGSTONE)
 Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Treo Fixed Random_C



Treo Fixed Random_D



ALMOND GROVE



BROWN



DARK CHARCOAL



FOSSIL



SIERRA



SLATE



STEEL MOUNTAIN



TUSCANY



WALNUT

| | | | | | | | | | |
|---------------|--|--|--|--|-------------|--|--|--|--|
| Random Bundle | | LARGE RECTANGLE 235 x 352.5 x 60mm 9 1/2 x 13 7/8 x 2 3/8" 50 units/Bundle .89 Sq.Ft./Stone | | SQUARE 235 x 235 x 60mm 9 1/2 x 9 1/2 x 2 3/8" 50 units/Bundle .59 Sq.Ft./Stone | Single Unit | | SMALL RECTANGLE 117.5 x 235 x 60mm 4 5/8 x 9 1/2 x 2 3/8" 150 units/Bundle .30 Sq.Ft./Stone | | SMALL RECTANGLE 117.5 x 235 x 60mm 4 5/8 x 9 1/2 x 2 3/8" 400 units/Bundle .30 Sq.Ft./Stone |
| | | | | | | | | | |

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - 7mm
 Void - 5.5%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through


ENDURACOLOR[™]

Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Treo Fixed Random_R



Treo Fixed Random_S



ALMOND GROVE



FOSSIL



STEEL MOUNTAIN



WALNUT



SLATE



DARK CHARCOAL

| | | | | | | | | | |
|---------------|---|--|---|--|---|---|-------------|---|--|
| Random Bundle |  | LARGE RECTANGLE 233 x 349.5 x 60mm 9 1/4 x 13 3/4 x 2 3/8" 60 units/Bundle .82 Sq.Ft./Stone |  | SQUARE 233 x 233 x 60mm 9 1/4 x 9 1/4 x 2 3/8" 70 units/Bundle .55 Sq.Ft./Stone |  | SMALL RECTANGLE 116.5 x 233 x 60mm 4 5/8 x 9 1/4 x 2 3/8" 80 units/Bundle .27 Sq.Ft./Stone | Single Unit |  | RECTANGLE 116.5 x 233 x 60mm 4 5/8 x 9 1/4 x 2 3/8" 400 units/Bundle .29 Sq.Ft./Stone |
|---------------|---|--|---|--|---|---|-------------|---|--|

| | | | |
|--------------------|---------------|------------------------|--|
| | | SMALL RECTANGLE | |
| Bundle Type | RANDOM | SINGLE | |
| Plant Produced | NEW YORK | UXBRIDGE | |
| Thickness (mm) | 60 MM | 60 MM | |

| | | | |
|-----------------|----------|--------|--------|
| SQFT PER | Bundle | 116.87 | 116.87 |
| | Layer | 11.69 | 11.69 |
| | Sections | - | - |
| | Stone | 0.56 | 0.29 |

| | | | |
|-------------------|----------|-------|-------|
| PER BUNDLE | Layers | 10.00 | 10.00 |
| | Sections | - | - |

| | | | |
|-------------------------|----------|---|--------|
| SOLDIER LNFT PER | SqFt | - | 1.31 |
| | Sections | - | - |
| | Layer | - | 15.29 |
| | Bundle | - | 152.89 |

| | | | |
|------------------------|----------|--------|--------|
| SAILOR LNFT PER | SqFt | 1.57 | 2.62 |
| | Sections | - | - |
| | Layer | 18.35 | 30.58 |
| | Bundle | 183.46 | 305.77 |

| | | | |
|------------------|--------|--------|--------|
| UNITS PER | SqFt | 1.80 | 3.42 |
| | Layer | 21.00 | 40.00 |
| | Bundle | 210.00 | 400.00 |

| | | | |
|----------------|----------|-------|-------|
| LBS PER | Layer | 321 | 321 |
| | Sections | - | - |
| | Bundle | 3,208 | 3,208 |

| COLORS | Reflectance | Stock | Stock |
|----------------|----------------|-------|-------|
| Almond Grove | SR .25 SRI 25 | ✓ | ✓ |
| Fossil | SR .22 SRI 21 | ✓ | ✓ |
| Steel Mountain | SR .30 SRI 31 | ✓ | ✓ |
| Walnut | SR n/a SRI n/a | ✓ | |
| Slate | SR n/a SRI n/a | ✓ | |
| Dark Charcoal | SR n/a SRI n/a | | ✓ |

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Series Exposed Textured
 Joint Spacing - 10mm
 Void - 5.6%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

| | CURB | |
|--------------------|---------------|---------------|
| Bundle Type | SINGLE | RANDOM |
| Plant Produced | NEW YORK | NEW YORK |
| Thickness (mm) | 180 MM | 70 MM |

| SQFT PER | Bundle | - | 97.53 |
|----------|----------|---|-------|
| | Layer | - | 12.19 |
| | Sections | - | - |
| | Stone | - | 0.32 |

| PER BUNDLE | Layers | 3.00 | 8.00 |
|------------|----------|------|------|
| | Sections | - | - |

| SOLDIER LNFT PER | SqFt | - | - |
|------------------|----------|-------|---|
| | Sections | - | - |
| | Layer | 12.24 | - |
| | Bundle | 36.72 | - |

| SAILOR LNFT PER | SqFt | - | 2.34 |
|-----------------|----------|---|--------|
| | Sections | - | - |
| | Layer | - | 28.49 |
| | Bundle | - | 227.95 |

| UNITS PER | SqFt | - | 3.12 |
|-----------|--------|-------|--------|
| | Layer | 12.00 | 38.00 |
| | Bundle | 36.00 | 304.00 |


| LBS PER | Unit | 46 | - |
|---------|--------|--------|--------|
| | Layer | 555.00 | 398.00 |
| | Bundle | 1,664 | 3,186 |

| COLORS | Reflectance | Stock | Stock |
|--------------------|----------------|-------|-------|
| Crystalline Basalt | SR n/a SRI n/a | ✓ | ✓ |
| Peppered Granite | SR .38 SRI 42 | ✓ | ✓ |

LAYING PATTERNS



TribecaCobble Fixed Random_A



CRYSTALLINE BASALT



PEPPERED GRANITE

| | | | | | | | | | |
|---------------|---|--|---|---|---|--|-------------|---|--|
| Random Bundle |  | LARGE RECTANGLE 130 x 305 x 70mm 5 x 12 x 2 3/4" 88 units/Bundle .43 Sq.Ft./Stone |  | RECTANGLE 130 x 230 x 70mm 5 x 9 x 2 3/4" 88 units/Bundle .32 Sq.Ft./Stone |  | SMALL RECTANGLE 130 x 175 x 70mm 5 x 6 7/8 x 2 3/4" 128 units/Bundle .25 Sq.Ft./Stone | Single Unit |  | CURB 230 x 290 x 180mm 9 x 11 1/2 x 7" 36 units/Bundle |
|---------------|---|--|---|---|---|--|-------------|---|--|

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** For permeable installations, Unilock recommends using granite chips for joint filler. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

- Edge Detail - Zero
- Surface Texture - Smooth
- Joint Spacing - 2mm
- Void - 40%

TECHNOLOGIES

PERMEABLE

Can be installed to allow water to flow through


CLASSIC

Budget-friendly traditional product mix

TECHNICAL INFORMATION

- Conforms to ASTM C1319
- Eligible for LEED v4.1 credits

LAYING PATTERNS



Turfstone Fixed
Random_R

| | |
|--------------------|-----------------|
| | STANDARD |
| Bundle Type | RANDOM |
| Plant Produced | BREWSTER |
| Thickness (mm) | 80 MM |

| | | |
|-----------------|----------|-------|
| SQFT PER | Bundle | 72.00 |
| | Layer | 10.29 |
| | Sections | - |
| | Stone | 2.57 |

| | | |
|-------------------|----------|------|
| PER BUNDLE | Layers | 7.00 |
| | Sections | - |

| | | |
|-------------------------|----------|---|
| SOLDIER LNFT PER | SqFt | - |
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| | | |
|------------------------|----------|---|
| SAILOR LNFT PER | SqFt | - |
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| | | |
|------------------|--------|-------|
| UNITS PER | SqFt | 0.39 |
| | Layer | 4.00 |
| | Bundle | 28.00 |

| | | |
|----------------|--------|--------|
| LBS PER | Unit | 62 |
| | Layer | 250.00 |
| | Bundle | 1,748 |

| COLORS | Reflectance | Stock |
|---------------|--------------------|--------------|
| Natural | SR .30 SRI 32 | ✓ |



NATURAL

Single Unit



STANDARD
 400 x 600 x 80mm
 15 3/4 x 23 5/8 x 3 1/8"
 28 units/Bundle
 2.57 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Umbriano Mottled
 Joint Spacing - 4mm
 Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

EASYSOAK™

Factory Sealed to provide integral stain resistance


COLORFUSION™

Subtly mottled colored finish


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Umbriano Fixed
Random_A



Umbriano Fixed
Random_B



FRENCH GREY



MIDNIGHT SKY



SUMMER WHEAT



WINTER MARVEL

| Bundle Type | RANDOM |
|----------------|----------|
| Plant Produced | NEW YORK |
| Thickness (mm) | 60 MM |

| SQFT PER | Bundle | 104.60 |
|----------|----------|--------|
| | Layer | 10.46 |
| | Sections | - |
| | Stone | 1.31 |

| PER BUNDLE | Layers | 10.00 |
|------------|----------|-------|
| | Sections | - |

| SOLDIER LNFT PER | SqFt | - |
|------------------|----------|---|
| | Sections | - |
| | Layer | - |
| | Bundle | - |

| SAILOR LNFT PER | SqFt | 0.82 |
|-----------------|----------|-------|
| | Sections | - |
| | Layer | 8.61 |
| | Bundle | 86.12 |

| UNITS PER | SqFt | 0.76 |
|-----------|----------|-------|
| | Sections | - |
| | Bundle | 80.00 |

| LBS PER | Layer | 305 |
|---------|----------|-------|
| | Sections | - |
| | Bundle | 3,050 |

| COLORS | Reflectance | Stock |
|---------------|---------------|-------|
| French Grey | SR .18 SRI 17 | ✓ |
| Midnight Sky | SR .17 SRI 15 | SO |
| Summer Wheat | SR .42 SRI 48 | ✓ |
| Winter Marvel | SR .35 SRI 38 | ✓ |

Random Bundle



LARGE RECTANGLE
 360 x 540 x 60mm
 14 1/4 x 21 1/4 x 2 3/8"
 20 units/Bundle
 2.09 Sq.Ft./Stone



SQUARE
 360 x 360 x 60mm
 14 1/4 x 14 1/4 x 2 3/8"
 30 units/Bundle
 1.40 Sq.Ft./Stone



SMALL RECTANGLE
 180 x 360 x 60mm
 7 x 14 1/4 x 2 3/8"
 30 units/Bundle
 .70 Sq.Ft./Stone

80mm Drive
friendly available
as special order

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. This product is not intended for vehicular use.**
 All measurements are nominal. Contact Unilock for more information.



| | 8 x 8 | 8 x 16 | 12 x 24 | 16 x 16 | 24 x 24 |
|--------------------|---------------|---------------|---------------|---------------|---------------|
| Bundle Type | SINGLE | SINGLE | SINGLE | SINGLE | SINGLE |
| Plant Produced | NEW YORK |
| Thickness (mm) | 70 MM |

| SQFT PER | Bundle | 82.67 | 82.67 | 93.00 | 82.67 | 62.00 |
|-----------------|----------|-------|-------|-------|-------|-------|
| | Layer | 10.33 | 10.33 | 11.63 | 10.33 | 7.75 |
| | Sections | - | - | - | - | - |
| | Stone | 0.43 | 0.86 | 1.94 | 1.72 | 3.88 |

| PER BUNDLE | Layers | 8.00 | 8.00 | 8.00 | 8.00 | 8.00 |
|-------------------|----------|------|------|------|------|------|
| | Sections | - | - | - | - | - |

| SOLDIER LNFT PER | SqFt | 1.52 | 0.76 | 0.51 | 0.76 | 0.51 |
|-------------------------|----------|--------|-------|-------|-------|-------|
| | Sections | - | - | - | - | - |
| | Layer | 15.75 | 7.87 | 5.91 | 7.87 | 3.94 |
| | Bundle | 125.98 | 62.99 | 47.24 | 62.99 | 31.50 |

| SAILOR LNFT PER | SqFt | 1.52 | 1.52 | 1.02 | 0.76 | 0.51 |
|------------------------|----------|--------|--------|-------|-------|-------|
| | Sections | - | - | - | - | - |
| | Layer | 15.75 | 15.75 | 11.81 | 7.87 | 3.94 |
| | Bundle | 125.98 | 125.98 | 94.49 | 62.99 | 31.50 |

| UNITS PER | SqFt | 2.32 | 1.16 | 0.52 | 0.58 | 0.26 |
|------------------|----------|--------|-------|-------|-------|-------|
| | Sections | - | - | - | - | - |
| | Bundle | 192.00 | 96.00 | 48.00 | 48.00 | 16.00 |

| LBS PER | Layer | 331 | 331 | 372 | 331 | 258 |
|----------------|----------|-------|-------|-------|-------|-------|
| | Sections | - | - | - | - | - |
| | Bundle | 2,646 | 2,646 | 2,978 | 2,646 | 2,055 |

| COLORS | Reflectance | Stock | Stock | Stock | Stock | Stock |
|---------------|---------------|-------|-------|-------|-------|-------|
| French Grey | SR .18 SRI 17 | SO | SO | SO | SO | SO |
| Midnight Sky | SR .17 SRI 15 | SO | SO | SO | SO | SO |
| Summer Wheat | SR .42 SRI 48 | SO | SO | SO | SO | SO |
| Winter Marvel | SR .35 SRI 38 | SO | SO | SO | SO | SO |

APPLICATIONS



APPEARANCE

Edge Detail - Micro
 Surface Texture - Umbriano Mottled
 Joint Spacing - 4mm
 Void - n/a

TECHNOLOGIES

ENDURACOLOR[™]

Refined surface and long-lasting color

EASYCLEAN[™]

Factory Sealed to provide integral stain resistance


COLORFUSION[™]

Subtly mottled colored finish


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Umbriano 24x24
RB_AG




Umbriano 12x24
HB_0



FRENCH GREY



MIDNIGHT SKY



SUMMER WHEAT



WINTER MARVEL

| Single Units | 8 x 8 | 8 x 16 | 12 x 24 | 16 x 16 | 24 x 24 |
|--------------|--|---|--|--|--|
| | | | | | |
| | 200 x 200 x 70mm 7 7/8 x 7 7/8 x 2 3/4" | 200 x 400 x 70mm 7 7/8 x 15 3/4 x 2 3/4" | 300 x 600 x 70mm 11 7/8 x 23 3/8 x 2 3/4" | 400 x 400 x 70mm 15 3/4 x 15 3/4 x 2 3/4" | 600 x 600 x 70mm 23 3/8 x 23 3/8 x 2 3/4" |
| | 192 units/Bundle .43 Sq.Ft./Stone | 96 units/Bundle .86 Sq.Ft./Stone | 48 units/Bundle 1.94 Sq.Ft./Stone | 48 units/Bundle 1.72 Sq.Ft./Stone | 16 units/Bundle 3.88 Sq.Ft./Stone |

Notes: **Special Order items - Lead time required. SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.**
 All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Smooth
 Joint Spacing - 4mm
 Void - n/a


TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



UrbanLine_18x24
 RB_A



UrbanLine_18x24
 SB_B



OPAL



STEEL MOUNTAIN



FOSSIL



WALNUT



TUSCANY

| | |
|--------------------|----------------|
| | 18 x 24 |
| Bundle Type | SINGLE |
| Plant Produced | NEW YORK |
| Thickness (mm) | 60 MM |

| | | |
|-----------------|----------|-------|
| SQFT PER | Bundle | 93.00 |
| | Layer | 11.63 |
| | Sections | - |
| | Stone | 2.91 |

| | | |
|-------------------|----------|------|
| PER BUNDLE | Layers | 8.00 |
| | Sections | - |

| | | |
|-------------------------|----------|-------|
| SOLDIER LNFT PER | SqFt | 0.51 |
| | Sections | - |
| | Layer | 5.91 |
| | Bundle | 47.25 |

| | | |
|------------------------|----------|-------|
| SAILOR LNFT PER | SqFt | 0.68 |
| | Sections | - |
| | Layer | 7.87 |
| | Bundle | 62.99 |

| | | |
|------------------|--------|-------|
| UNITS PER | SqFt | 0.34 |
| | Layer | 4.00 |
| | Bundle | 32.00 |

| | | |
|----------------|--------|--------|
| LBS PER | Unit | 80 |
| | Layer | 319.00 |
| | Bundle | 2,552 |

| COLORS | Reflectance | Stock |
|----------------|-----------------|-------|
| Opal | SR .n/a SRI n/a | ✓ |
| Steel Mountain | SR .n/a SRI n/a | ✓ |
| Fossil | SR .n/a SRI n/a | ✓ |
| Walnut | SR .n/a SRI n/a | ✓ |
| Tuscany | SR .n/a SRI n/a | ✓ |

Single Units



18 x 24
 450x 600 x 60mm
 17 3/4 x 23 5/8 x 2 3/8"
 32 units/Bundle
 2.91 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important:** A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Textured
 Joint Spacing - 3-7mm
 Void - n/a

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

EASYSOFT™

Factory Sealed to provide integral stain resistance


COMFORT STEP™

Ultra-smooth surface texture


TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

LAYING PATTERNS



Westport Fixed
Random_A



Westport Fixed
Random_B



CHARCOAL



FOSSIL



STEEL MOUNTAIN



WALNUT

| | | | |
|--|--------------------|---------------|---------------|
| | | | 5 x 10 |
| | Bundle Type | RANDOM | SINGLE |
| | Plant Produced | UXBRIDGE | UXBRIDGE |
| | Thickness (mm) | 70 MM | 70 MM |

| | | | |
|-----------------|----------|-------|-------|
| SQFT PER | Bundle | 94.19 | 94.19 |
| | Layer | 11.77 | 11.77 |
| | Sections | - | - |
| | Stone | 0.59 | 0.34 |

| | | | |
|-------------------|----------|------|------|
| PER BUNDLE | Layers | 8.00 | 8.00 |
| | Sections | - | - |

| | | | |
|-------------------------|----------|---|--------|
| SOLDIER LNFT PER | SqFt | - | 1.24 |
| | Sections | - | - |
| | Layer | - | 14.58 |
| | Bundle | - | 116.64 |

| | | | |
|------------------------|----------|--------|--------|
| SAILOR LNFT PER | SqFt | 1.24 | 2.48 |
| | Sections | - | - |
| | Layer | 14.57 | 29.16 |
| | Bundle | 116.56 | 233.28 |

| | | | |
|------------------|--------|--------|--------|
| UNITS PER | SqFt | 1.70 | 2.97 |
| | Layer | 20.00 | 35.00 |
| | Bundle | 160.00 | 280.00 |

| | | | |
|----------------|----------|-------|-------|
| LBS PER | Layer | 373 | 373 |
| | Sections | - | - |
| | Bundle | 2,985 | 2,985 |

| COLORS | Reflectance | Stock | Stock |
|----------------|----------------|-------|-------|
| Charcoal | SR.n/a SRI n/a | | ✓ |
| Fossil | SR n/a SRI n/a | ✓ | ✓ |
| Steel Mountain | SR n/a SRI n/a | ✓ | ✓ |
| Walnut | SR n/a SRI n/a | ✓ | ✓ |

Random Bundle



LARGE RECTANGLE
 254 x 380 x 70mm
 10 x 15 x 2¾"
 32 units/Bundle
 1.04 Sq.Ft./Stone



SQUARE
 254 x 254 x 70mm
 10 x 10 x 2¾"
 56 units/Bundle
 .69 Sq.Ft./Stone



RECTANGLE
 127 x 254 x 70mm
 5 x 10 x 2¾"
 72 units/Bundle
 .35 Sq.Ft./Stone

Single Unit



5 x 10 RECTANGLE
 127 x 254 x 70mm
 5 x 10 x 2¾"
 280 units/Bundle
 .35 Sq.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. **Important: A urethane rubber paver mat must be used to prevent scuffing when compacting on textured surfaces.** All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

SUNSET FIREPIT KITS

Located on page 86



ROUND



SQUARE



ALMOND GROVE



LIMESTONE



SIERRA

| | STANDARD |
|----------------|----------|
| Bundle Type | SINGLE |
| Plant Produced | UXBRIDGE |
| Thickness (mm) | 100 MM |

| | | |
|----------|--------|-------|
| FCFT PER | Bundle | 32.00 |
| | Layer | 6.00 |
| | Stone | 0.33 |

| | | |
|------------|----------|------|
| PER BUNDLE | Layers | - |
| | Sections | 3.00 |

| | | |
|----------|--------|------|
| LNFT PER | Bundle | - |
| | Unit | 1.00 |

| | | |
|-----------|----------|--------|
| UNITS PER | SqFt | 3.00 |
| | Sections | 36.00 |
| | Bundle | 108.00 |

| | | |
|---------|----------|-------|
| LBS PER | Unit | 30 |
| | Sections | 1,091 |
| | Bundle | 3,274 |

| COLORS | Reflectance | Stock |
|--------------|----------------|-------|
| Almond Grove | SR n/a SRI n/a | ✓ |
| Limestone | SR n/a SRI n/a | ✓ |
| Sierra | SR n/a SRI n/a | ✓ |

Single Unit



STANDARD
300 x 100 x 200mm
11 7/8 x 3 7/8 x 7 7/8"
108 units/Bundle
.33 Fc.Ft./Stone

Notes: Maximum height is 24" (under optimum conditions). Based on an 8" deep wall coverage = 32 sqft per bundle. *Based on 12" deep wall coverage = 21.4 sqft per bundle. All measurements are nominal. Contact Unilock for more information.



| | CORNER | XL UNIT | COPING / STEP TREAD | WEDGE CAP UNIT |
|--------------------|---------------|---------------|---------------------|----------------|
| Bundle Type | RANDOM | SINGLE | SINGLE | SINGLE |
| Plant Produced | UXBRIDGE | UXBRIDGE | UXBRIDGE | UXBRIDGE |
| Thickness (mm) | 150 MM | 150 MM | 75 MM | 75 MM |

| FCFT PER | Bundle | 15.00 | 21.33 | 15.50 | 16.66 |
|----------|--------|-------|-------|-------|-------|
| | Layer | 5.00 | 5.33 | 1.94 | 2.08 |
| | Stone | 0.83 | 0.67 | 0.97 | 0.17 |

| PER BUNDLE | Layers | 3.00 | 4.00 | 8.00 | 8.00 |
|------------|----------|------|------|------|------|
| | Sections | - | - | 2.00 | - |

| LNFT PER | Bundle | - | - | 64.00 | 63.39 |
|----------|--------|---|---|-------|-------|
| | Unit | - | - | 4.00 | 0.66 |

| UNITS PER | SqFt | 1.20 | 1.50 | 1.63 | 5.88 |
|-----------|--------|-------|-------|-------|-------|
| | Layer | 6.00 | 8.00 | 2.00 | 12.00 |
| | Bundle | 18.00 | 32.00 | 16.00 | 96.00 |

| LBS PER | Unit | 46 | 77 | 145 | 27 |
|---------|----------|-----|-------|-------|-------|
| | Sections | - | - | - | - |
| | Bundle | 820 | 2,455 | 2,320 | 2,544 |

| COLORS | Reflectance | Stock | Stock | Stock | Stock |
|--------------|----------------|-------|-------|-------|-------|
| Almond Grove | SR n/a SRI n/a | ✓ | ✓ | ✓ | ✓ |
| Granite | SR n/a SRI n/a | ✓ | ✓ | ✓ | ✓ |
| Sierra | SR n/a SRI n/a | ✓ | ✓ | ✓ | ✓ |

APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Split

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits



ALMOND GROVE



GRANITE



SIERRA

| | | | | | | | | |
|--------------|---|--|---|--|---|---|---|---|
| Single Units |  | CORNER 200 x 150 x 300mm 7 7/8 x 5 7/8 x 11 7/8" 18 units/Bundle .81 Fc.Ft./Stone |  | XL UNIT 400 x 150 x 300mm 15 3/4 x 5 7/8 x 11 7/8" 32 units/Bundle .67 Fc.Ft./Stone |  | COPING / STEP TREAD 600 x 75 x 300mm 23 5/8 x 3 x 11 7/8" 16 units/Bundle .97 Fc.Ft./Stone |  | WEDGE CAP UNIT 215 x 323 x 75mm 8 1/2 x 12 3/4 x 3" 96 units/Bundle .17 Fc.Ft./Stone |
|--------------|---|--|---|--|---|---|---|---|

Notes: Maximum height without setback 36" (under optimum conditions). Maximum height with setback is 42" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. XL units will allow for a minimum 9ft. outside radius. Wedge cap radius = 7", contains 8 closed-end units per bundle. Closed-end not sold separately. All Concord Wall™ is shipped on refundable skid. Closed-end step tread is available. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. Contact your local Unilock Representative for details. Retaining wall engineering software is also available free of charge at www.unilock.com.



| | CORNER | XL TAPERED | COPING |
|--------------------|---------------|---------------|---------------|
| Bundle Type | SINGLE | SINGLE | SINGLE |
| Plant Produced | UXBRIDGE | UXBRIDGE | UXBRIDGE |
| Thickness (mm) | 150 MM | 150 MM | 75 MM |

| FCFT PER | Bundle | 46.52 | 20.67 | 15.50 |
|----------|--------|-------|-------|-------|
| | Layer | 11.63 | 5.17 | 1.94 |
| | Stone | 0.97 | 0.65 | 0.32 |

| PER BUNDLE | Layers | 4.00 | 4.00 | 8.00 |
|------------|----------|------|------|------|
| | Sections | - | - | - |

| LNFT PER | Bundle | - | 42.00 | 62.99 |
|----------|--------|---|-------|-------|
| | Unit | - | 1.31 | 1.31 |

| UNITS PER | SqFt | 1.03 | 1.55 | 3.10 |
|-----------|--------|-------|-------|-------|
| | Layer | 12.00 | 8.00 | 6.00 |
| | Bundle | 48.00 | 32.00 | 48.00 |

| LBS PER | Layer | 695 | 627 | 282 |
|---------|----------|-------|-------|-------|
| | Sections | - | - | - |
| | Bundle | 2,780 | 2,508 | 2,256 |

| COLORS | | Stock | Stock | Stock |
|--------------|----------------|-------|-------|-------|
| Almond Grove | SR.n/a SRI n/a | ✓ | ✓ | ✓ |
| Sandstone | SR.n/a SRI n/a | ✓ | ✓ | ✓ |
| Granite | SR.n/a SRI n/a | ✓ | ✓ | ✓ |

APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

APPEARANCE

Edge Detail - n/a

Surface Texture - Smooth

Joint Spacing - n/a

Void - n/a

TECHNOLOGIES


CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits





ALMOND GROVE



SANDSTONE



GRANITE

| | | | | | | |
|--------------|---|---|---|--|---|---|
| Single Units |  | <p>CORNER 400 x 150 x 200mm 15 3/4 x 5 7/8 x 7 7/8" 48 units/Bundle .97 Fc.Ft./Stone</p> |  | <p>XL TAPERED 400 x 150 x 300mm 15 3/4 x 5 7/8 x 11 7/8" 32 units/Bundle .65 Fc.Ft./Stone</p> |  | <p>COPING 400 x 75 x 325mm 15 3/4 x 3 x 12 3/4" 48 units/Bundle .32 Fc.Ft./Stone</p> |
|--------------|---|---|---|--|---|---|

Notes: Maximum height is 42" (under optimum conditions). Higher walls can be achieved using geogrid reinforcement. All Concord Wall Smooth is shipped on refundable skid. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. Contact your local Unilock Representative for details. Retaining wall engineering software is also available free of charge at www.unilock.com.



| | STANDARD | STANDARD HALF | CORNER 45° | CORNER 90° |
|--------------------|---------------|---------------|---------------|---------------|
| Bundle Type | SINGLE | SINGLE | SINGLE | SINGLE |
| Plant Produced | ONTARIO | ONTARIO | ONTARIO | ONTARIO |
| Thickness (mm) | 300 MM | 300 MM | 300 MM | 300 MM |

| | | | | | |
|-----------------|--------|------|------|------|------|
| FCFT PER | Bundle | 6.02 | 3.00 | 7.04 | 7.04 |
| | Layer | 6.02 | 3.00 | 7.04 | 7.04 |
| | Stone | 6.02 | 3.00 | 7.04 | 7.04 |

| | | | | | |
|-------------------|----------|------|------|------|------|
| PER BUNDLE | Layers | 1.00 | 1.00 | 1.00 | 1.00 |
| | Sections | - | - | - | - |

| | | | | | |
|-----------------|--------|------|------|---|---|
| LNFT PER | Bundle | 6.00 | 3.00 | - | - |
| | Unit | 6.00 | 3.00 | - | - |

| | | | | | |
|------------------|----------|------|------|------|------|
| UNITS PER | SqFt | 0.17 | 0.33 | 0.14 | 0.14 |
| | Sections | - | - | - | - |
| | Bundle | 1.00 | 1.00 | 1.00 | 1.00 |

| | | | | | |
|----------------|----------|-------|-----|-------|-------|
| LBS PER | Unit | 1,680 | 800 | 1,480 | 1,320 |
| | Sections | - | - | - | - |
| | Bundle | 1,680 | 800 | 1,480 | 1,320 |

| COLORS | Reflectance | Stock | Stock | Stock | Stock |
|---------|----------------|-------|-------|-------|-------|
| Natural | SR n/a SRI n/a | SO | SO | SO | SO |

APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

APPEARANCE

Edge Detail - n/a

Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C1372

Eligible for LEED v4.1 credits



NATURAL

| | | | | |
|--------------|--|--|--|--|
| Single Units |  |  |  |  |
| | STANDARD 1830 x 300 x 600mm 72 x 11 7/8 x 23 5/8" 1 unit/Bundle 6.02 Fc.Ft./Stone | STANDARD HALF 915 x 300 x 600mm 36 x 11 7/8 x 23 5/8" 1 unit/Bundle 3.00 Fc.Ft./Stone | CORNER 45° 1520 x 300 x 600mm 59 7/8 x 11 7/8 x 23 5/8" 1 unit/Bundle 7.04 Fc.Ft./Stone | CORNER 90° 1520 x 300 x 600mm 59 7/8 x 11 7/8 x 23 5/8" 1 unit/Bundle 7.04 Fc.Ft./Stone |

Notes: *Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Refer to terms and conditions for placement rates. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.



| | TIE-BACK | COPING HALF | COPING STANDARD | COPING CLOSED-END |
|--------------------|----------|-------------|-----------------|-------------------|
| Bundle Type | SINGLE | SINGLE | SINGLE | SINGLE |
| Plant Produced | ONTARIO | ONTARIO | ONTARIO | ONTARIO |
| Thickness (mm) | 300 MM | 300 MM | 300 MM | 300 MM |

| FCFT PER | Bundle | 2.00 | 2.95 | 6.02 | 6.02 |
|----------|--------|------|------|------|------|
| | Layer | 2.00 | 2.95 | 6.02 | 6.02 |
| | Stone | 2.00 | 2.95 | 6.02 | 6.02 |

| PER BUNDLE | Layers | 1.00 | 1.00 | 1.00 | 1.00 |
|------------|----------|------|------|------|------|
| | Sections | - | - | - | - |

| LNFT PER | Bundle | - | - | 6.00 | 6.00 |
|----------|--------|---|---|------|------|
| | Unit | - | - | 6.00 | 6.00 |

| UNITS PER | SqFt | 0.50 | 0.34 | 0.17 | 0.17 |
|-----------|----------|------|------|------|------|
| | Sections | - | - | - | - |
| | Bundle | 1.00 | 1.00 | 1.00 | 1.00 |

| LBS PER | Unit | 1,660 | 780 | 1,560 | 1,560 |
|---------|----------|-------|-----|-------|-------|
| | Sections | - | - | - | - |
| | Bundle | 1,660 | 780 | 1,560 | 1,560 |

| COLORS | Reflectance | Stock | Stock | Stock | Stock |
|---------|----------------|-------|-------|-------|-------|
| Natural | SR n/a SRI n/a | SO | SO | SO | SO |

APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

APPEARANCE

Edge Detail - n/a

Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C1372

Eligible for LEED v4.1 credits



NATURAL

| | | | | |
|--------------|---|---|--|---|
| Single Units |  |  |  |  |
| | TIE-BACK | COPING HALF | COPING STANDARD | COPING CLOSED-END |
| | 1830 x 300 x 600mm | 915 x 300 x 600mm | 1830 x 300 x 600mm | 1830 x 300 x 600mm |
| | 72 x 11 7/8 x 23 5/8" | 36 x 11 7/8 x 23 5/8" | 72 x 11 7/8 x 23 5/8" | 72 x 11 7/8 x 23 5/8" |
| | 1 unit/Bundle 6.02 Fc.Ft./Stone | 1 unit/Bundle 2.95 Fc.Ft./Stone | 1 unit/Bundle 6.02 Fc.Ft./Stone | 1 unit/Bundle 6.02 Fc.Ft./Stone |

Notes: *Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. 1/2 Standard units are slightly tapered and can be used to create a 45 foot radius. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.



| | TIE-BACK | CORNER 90° | STANDARD | COPING | COPING CLOSED-END |
|--------------------|---------------|---------------|---------------|---------------|-------------------|
| Bundle Type | SINGLE | SINGLE | SINGLE | SINGLE | SINGLE |
| Plant Produced | ONTARIO | ONTARIO | ONTARIO | ONTARIO | ONTARIO |
| Thickness (mm) | 300 MM |

| FCFT PER | Bundle | 4.60 | 16.67 | 24.10 | 24.10 | 24.10 |
|----------|--------|------|-------|-------|-------|-------|
| | Layer | 2.34 | 8.34 | 12.05 | 12.05 | 12.05 |
| | Stone | 1.17 | 4.17 | 6.02 | 6.02 | 6.02 |

| PER BUNDLE | Layers | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
|------------|----------|------|------|------|------|------|
| | Sections | - | - | - | - | - |

| LNFT PER | Bundle | - | - | 24.00 | 24.00 | 24.00 |
|----------|--------|---|---|-------|-------|-------|
| | Unit | - | - | 6.00 | 6.00 | 6.00 |

| UNITS PER | SqFt | 0.85 | 0.24 | 0.17 | 0.17 | 0.17 |
|-----------|--------|------|------|------|------|------|
| | Layer | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 |
| | Bundle | 4.00 | 4.00 | 4.00 | 4.00 | 4.00 |

| LBS PER | Layer | 940 | 460 | 884 | 884 | 884 |
|---------|----------|-------|-------|-------|-------|-------|
| | Sections | - | - | - | - | - |
| | Bundle | 3,752 | 1,840 | 3,752 | 3,536 | 3,536 |

| COLORS | Reflectance | Stock | Stock | Stock | Stock | Stock |
|---------|----------------|-------|-------|-------|-------|-------|
| Natural | SR n/a SRI n/a | SO | SO | SO | SO | SO |

APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

APPEARANCE

Edge Detail - n/a

Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C1372

Eligible for LEED v4.1 credits



NATURAL

| Single Units | TIE-BACK | CORNER | STANDARD | COPING | COPING CLOSED-END |
|--------------|---|--|--|--|--|
| | | | | | |
| | 1830 x 300 x 360mm 72 x 11 7/8 x 14 1/4" 4 unit/Bundle 1.17 Fc.Ft./Stone | 900 x 300 x 360mm 35 1/2 x 11 7/8 x 14 1/4" 4 unit/Bundle 4.17 Fc.Ft./Stone | 1830x 300 x 360mm 72 x 11 7/8 x 14 1/4" 4 unit/Bundle 6.02 Fc.Ft./Stone | 1830x 300 x 360mm 72 x 11 7/8 x 14 1/4" 4 unit/Bundle 6.02 Fc.Ft./Stone | 1830x 300 x 360mm 72 x 11 7/8 x 14 1/4" 4 unit/Bundle 6.02 Fc.Ft./Stone |

Notes: *Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY. Closed-end coping units are closed on both ends so that they may be used as left or right units. Tie-back units are reinforced with steel. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. All measurements are nominal. Contact Unilock for more information.





The enhanced Estate Wall System with 6" and 3" high units, is ideal for all residential landscape walls and vertical element construction. The front and back of each unit is rock-faced making it perfect for seat walls and the unique tapered units can be used for both straight or curved applications.


Estate Wall™ System

Units

WALL UNITS

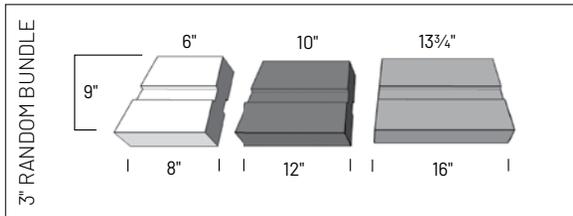
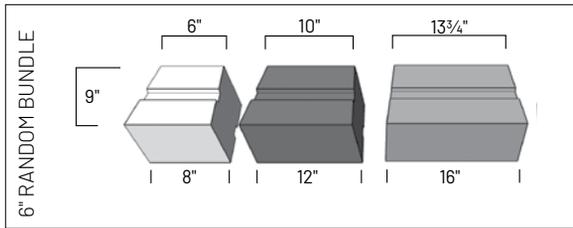


LARGE/CORNER UNITS

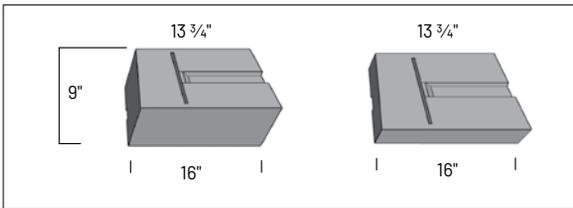

NOTE: See Product Data for packaging information.

COPING

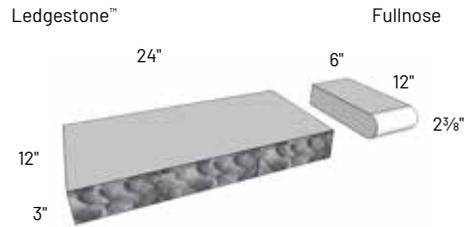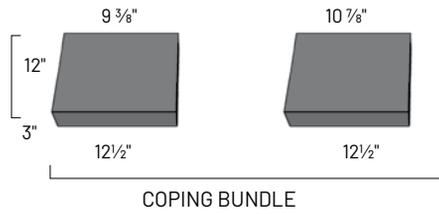


NOTE: Different products can be used for Estate Wall coping. LedgeStone and Fullnose are two of the most popular.




NOTE: Unilock Recommends using the Universal Base Units

Cross Sections

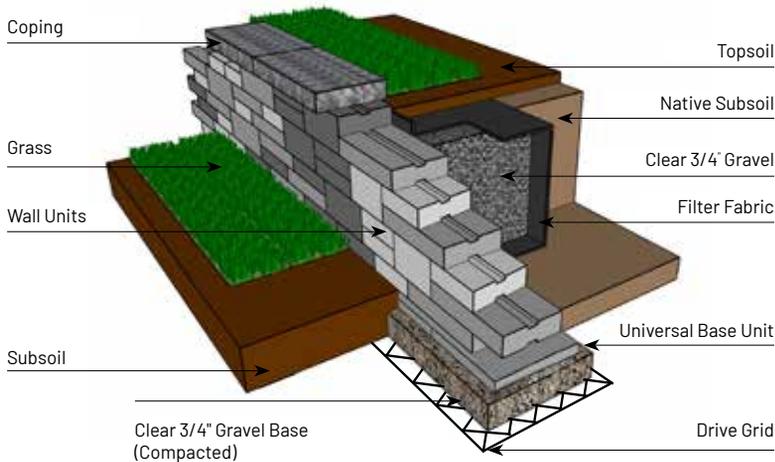


MAXIMUM HEIGHT FOR VERTICAL APPLICATION - 24"
MAXIMUM HEIGHT FOR SETBACK APPLICATION - 42"

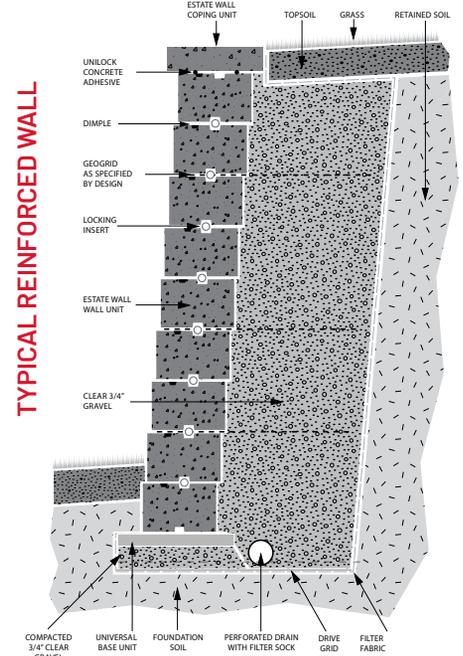

*Higher wall up to 6' can be achieved using geogrid reinforcement. Contact your Unilock Territory Manager.

Corners


CONVERTIBLE LARGE/CORNER UNITS



To split a large convertible unit, use a hammer and chisel to score the top and sides, then flip the unit upside down and use the chisel to break the unit. This may require a couple of hits along the groove to achieve a clean break.

Each bundle contains approximately 9 convertible units.


90° SEAT WALL CORNER

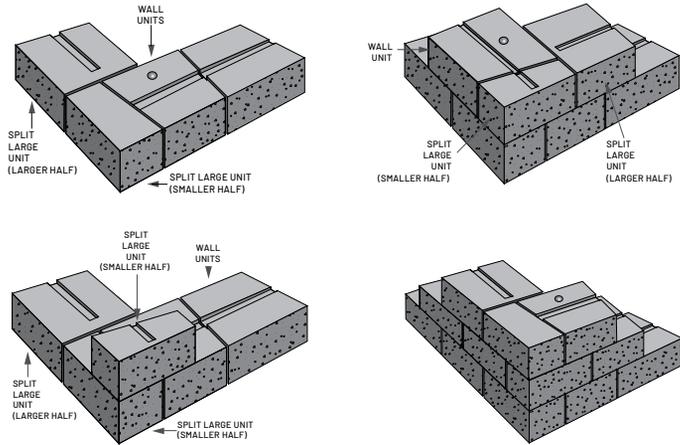

LOCKING INSERTS



Depending on the application or the wall strength required, you can construct the Estate Wall System vertically or with a setback. To assist in alignment and locking, proprietary plastic inserts are provided with each bundle. Depending on the orientation of the insert will dictate whether it goes up vertical or with a setback.

Note: It is strongly recommended that you use adhesive on all rows and for all applications to achieve maximum stability and strength.

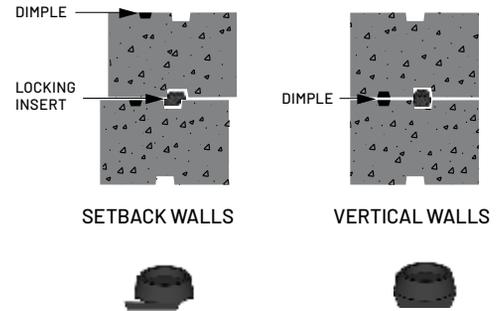

Seat Walls



SEAT WALL TERMINATION

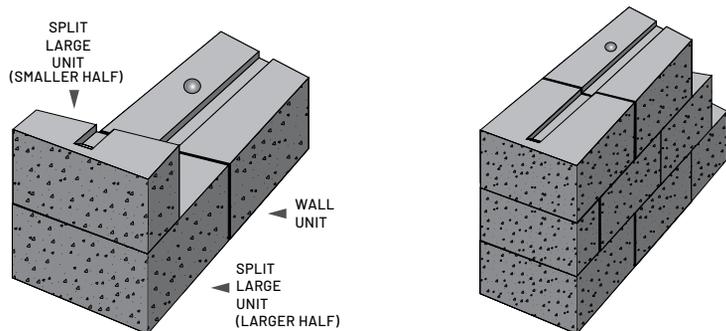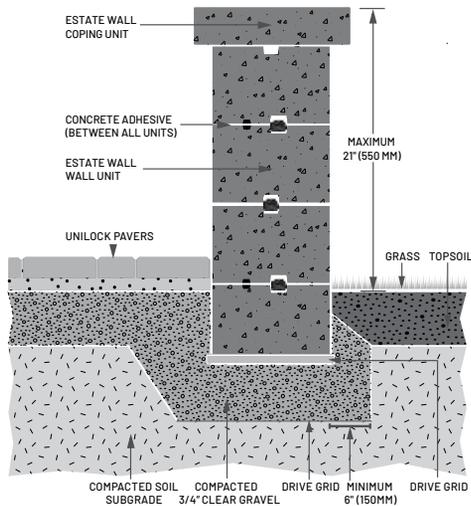

Alternate courses


System Patterns

RANDOM PATTERNS OPEN BACK WALL

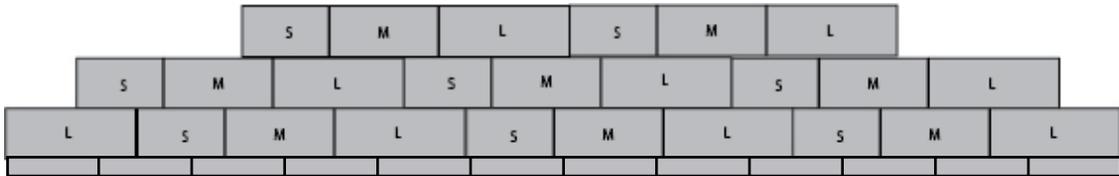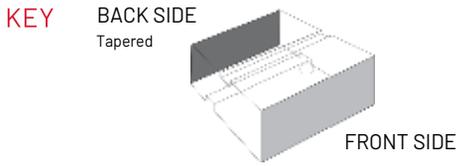

Use Universal Base Units for base

RANDOM PATTERNS SOLID WALL




Use Universal Base Units for base

CURVED RADIUS

Radius achieved using only the tapered (wedge) units.

| | | | | | | | |
|------------------|--------------------------|--|----------------|----------------|---------------|------------|--------------------|
| Radius in inches | 35" | 27" | 35" | 44" | 31" | 35" | 40" |
| Unit sequence | 8",12",16" | Only 8" Units | Only 12" Units | Only 16" Units | 9",12",8",12" | 8",16", 8" | 12", 16", 12", 16" |
| Note: | Uses all units in bundle | These sequences will have left over units. Plan to use left overs in other parts of the project. | | | | | |

Random Units



Although the three tapered unit sizes come packaged together, they can be separated to achieve various radius projects. If you construct a radius using only one size unit, the other units will be left over. Careful planning will allow you to use these units elsewhere.



| | 3" RANDOM BUNDLE | 3" PILLAR/CORNER | 6" RANDOM BUNDLE | 6" PILLAR/CORNER | COPING BUNDLE |
|--------------------|------------------|------------------|------------------|------------------|---------------|
| Bundle Type | RANDOM | SINGLE | RANDOM | SINGLE | RANDOM |
| Plant Produced | UXBRIDGE | UXBRIDGE | UXBRIDGE | UXBRIDGE | UXBRIDGE |
| Thickness (mm) | 75 MM | 75 MM | 150 MM | 150 MM | 75 MM |

| FCFT PER | Bundle | 24.00 | 16.38 | 24.00 | 16.38 | 14.70 |
|----------|--------|-------|-------|-------|-------|-------|
| | Layer | 3.00 | 2.05 | 6.00 | 4.10 | 2.10 |
| | Stone | 0.25 | 0.26 | 0.50 | 0.51 | 0.23 |

| PER BUNDLE | Layers | 8.00 | 8.00 | 4.00 | 4.00 | 7.00 |
|------------|----------|------|------|------|------|------|
| | Sections | - | - | - | - | 7.00 |

| LNFT PER | Bundle | - | - | - | - | 56.87 |
|----------|--------|---|---|---|---|-------|
| | Unit | - | - | - | - | 0.90 |

| UNITS PER | SqFt | 4.00 | 3.91 | 2.00 | 1.95 | 4.29 |
|-----------|--------|-------|-------|-------|-------|-------|
| | Layer | 12.00 | 8.00 | 12.00 | 8.00 | 9.00 |
| | Bundle | 96.00 | 64.00 | 48.00 | 32.00 | 63.00 |

| LBS PER | Layer | 271.00 | 264 | 585 | 444 | 294 |
|---------|----------|--------|-------|-------|-------|-------|
| | Sections | - | - | - | - | 294 |
| | Bundle | 2,164 | 2,110 | 2,340 | 1,776 | 2,060 |

| COLORS | Reflectance | Stock | Stock | Stock | Stock | Stock |
|--------------|----------------|-------|-------|-------|-------|-------|
| Almond Grove | SR.n/a SRI n/a | ✓ | ✓ | ✓ | ✓ | ✓ |
| Charcoal | SR.n/a SRI n/a | | | | | ✓ |
| Granite | SR.n/a SRI n/a | ✓ | ✓ | ✓ | ✓ | ✓ |
| Sierra | SR.n/a SRI n/a | ✓ | ✓ | ✓ | ✓ | ✓ |

APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

APPEARANCE

Edge Detail - n/a

Surface Texture - Split

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1 credits




ALMOND GROVE



CHARCOAL



GRANITE



SIERRA

| | | | | | | | | | | | | |
|----------------|--|---|----------------|--|--|---------------|--|--|------------------|---|---|--|
| 3" Single Unit | | 3" PILLAR/CORNER 318 x 75 x 229mm 12 1/2 x 3 x 9" 64 units/Bundle .26 Fc.Ft./Stone | 6" Single Unit | | 6" PILLAR/CORNER 318 x 150 x 229mm 12 1/2 x 5 7/8 x 9" 32 units/Bundle .51 Fc.Ft./Stone | Coping Bundle | | COPING TAPERED 317.5 x 304.8 x 76.2mm 12 1/2 x 12 x 3" 56 units/Bundle .26 Fc.Ft./Stone | | CLOSED-END COPING UNIT 317.5 x 304.8 x 76.2mm 12 1/2 x 12 x 3" 7 units/Bundle .26 Fc.Ft./Stone | | |
| | | 3" LARGE UNIT 406 x 75 x 228mm 16 x 3 x 9" 32 units/Bundle .33 Fc.Ft./Stone | | | 3" MEDIUM UNIT 305 x 75 x 228mm 12 x 3 x 9" 32 units/Bundle .24 Fc.Ft./Stone | | | 3" SMALL UNIT 203 x 75 x 228mm 8 x 3 x 9" 32 units/Bundle .16 Fc.Ft./Stone | 6" Random Bundle | | 6" LARGE UNIT 406 x 150 x 228mm 16 x 5 7/8 x 9" 16 units/Bundle .66 Fc.Ft./Stone | |

Notes: 3" and 6" random wall bundles have convertible large units that can be used for corners or ending seat walls. End caps not sold separately. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

| | RANDOM BUNDLE | PILLAR /CORNER |
|--------------------|---------------|----------------|
| Bundle Type | RANDOM | SINGLE |
| Plant Produced | UXBRIDGE | UXBRIDGE |
| Thickness (mm) | 100 MM | 100 MM |

| FCFT PER | Bundle | 29.92 | 48.24 |
|----------|--------|-------|-------|
| | Layer | 9.97 | 16.08 |
| | Stone | - | 0.67 |

| PER BUNDLE | Layers | 3.00 | 3.00 |
|------------|----------|------|------|
| | Sections | - | - |

| LNFT PER | Bundle | 89.06 | 96.00 |
|----------|--------|-------|-------|
| | Unit | - | 1.33 |

| UNITS PER | SqFt | 2.01 | 1.49 |
|-----------|--------|-------|-------|
| | Layer | 20.00 | 24.00 |
| | Bundle | 60.00 | 72.00 |

| LBS PER | Unit | - | 39 |
|---------|--------|--------|--------|
| | Layer | 881.00 | 936.00 |
| | Bundle | 2,643 | 2,808 |

| COLORS | Reflectance | Stock | Stock |
|--------------|----------------|-------|-------|
| Almond Grove | SR.n/a SRI n/a | ✓ | ✓ |
| Granite | SR.n/a SRI n/a | ✓ | ✓ |
| Sierra | SR.n/a SRI n/a | ✓ | ✓ |



ALMOND GROVE



GRANITE




SIERRA

| Random Bundle | XL RECTANGLE | LARGE RECTANGLE | RECTANGLE | SMALL RECTANGLE | Single Unit | PILLAR/CORNER |
|---------------|--|--|--|--|-------------|--|
| | 600 x 100 x 200mm 23 5/8 x 3 7/8 x 7 7/8 15 units/Bundle .64 Fc.Ft./Stone | 500 x 100 x 200mm 19 3/4 x 3 7/8 x 7 7/8 15 units/Bundle .54 Fc.Ft./Stone | 400 x 100 x 200mm 15 3/4 x 3 7/8 x 7 7/8 15 units/Bundle .43 Fc.Ft./Stone | 300 x 100 x 200mm 11 7/8 x 3 7/8 x 7 7/8 15 units/Bundle .32 Fc.Ft./Stone | | 400 x 100 x 200mm 15 3/4 x 3 7/8 x 7 7/8 72 units/Bundle .67 Fc.Ft./Stone |

Notes: Sold in full bundles only and is produced and sold on a required, refundable skid. Spacing strips are shipped with random wall bundles to create even spacing between units. LedgeStone™, Unilock Natural Stone or 6"x12" Fullnose complement as possible coping options. All measurements are nominal. Contact Unilock for more information.

Lineo™ Dimensional Stone

Shadow Box - Spacers (supplied with bundle of product)


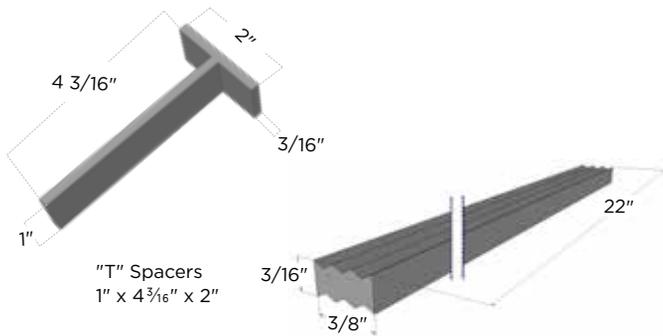


"T" Spacers
1" x 4 3/16" x 2"

"Strip" Spacers
3/16" x 3/8" x 22"

Adhesive "mound" is placed every 4 inches apart.

Mound must be minimum 3/8" high so that the top and bottom are securely adhered.

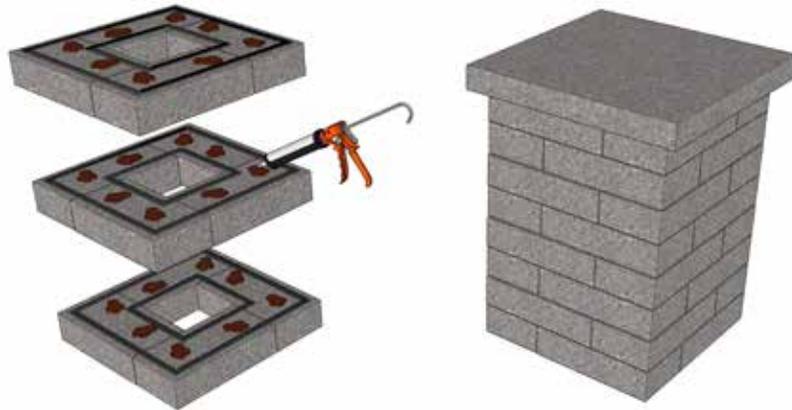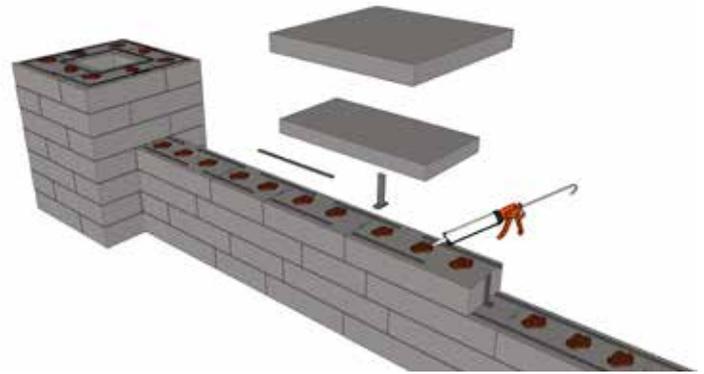

Notes:

Lineo is not a retaining wall. Lineo is a decorative landscape wall, with a typical height of 20" - 24" above grade. (Higher walls are possible when engineered by a professional engineer.)

In many cases, experienced installers are able to construct higher walls based on the actual design of the project or landscape feature. For example, designs containing 90 degree corners, box-like planters, hollow pillars and landscape features such as grill islands, can be successfully constructed to higher heights.

Disclaimer: The strength and capacity of a Lineo installation is dependent on many factors such as base material, site conditions, drainage, surcharge, design, and the quality and quantity of concrete adhesive used. Unilock cannot be responsible for installation failures. The performance of a Lineo installation rests solely on the installer or project engineer.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

| | STANDARD/ CORNER | COPING/ CLOSED-END |
|----------------|---------------------|-----------------------|
| Bundle Type | 2 UNIT | 2 UNIT |
| Plant Produced | UXBRIDGE | UXBRIDGE |
| Thickness (mm) | 90 MM | 90 MM |

| FCFT PER | Bundle | 20.93 | 20.93 |
|----------|--------|-------|-------|
| | Layer | 3.49 | 3.49 |
| | Stone | 0.44 | 0.44 |

| PER BUNDLE | Layers | 6.00 | 6.00 |
|------------|----------|------|------|
| | Sections | - | - |

| LNFT PER | Bundle | 70.87 | 70.87 |
|----------|--------|-------|-------|
| | Unit | 1.48 | 1.48 |

| UNITS PER | SqFt | 2.29 | 2.29 |
|-----------|--------|-------|-------|
| | Layer | 8.00 | 8.00 |
| | Bundle | 48.00 | 48.00 |

| LBS PER | Unit | 52 | 52 |
|---------|--------|--------|--------|
| | Layer | 415.00 | 415.00 |
| | Bundle | 2,489 | 2,489 |

| COLORS | Reflectance | Stock | Stock |
|--------------|----------------|-------|-------|
| Granite | SR.n/a SRI n/a | ✓ | ✓ |
| Almond Grove | SR.n/a SRI n/a | ✓ | ✓ |
| Sierra | SR.n/a SRI n/a | ✓ | ✓ |
| Sandstone | SR.n/a SRI n/a | ✓ | ✓ |



GRANITE





ALMOND GROVE



SIERRA



SANDSTONE

| | | | | | |
|---------------|--|--|---------------|--|--|
| 2 Unit Bundle |  |  | 2 Unit Bundle |  |  |
| | <p>CORNER/CLOSE-END 450 x 260 x 90mm 17¾ x 10¼ x 3½" 24 Units/Bundle 1.26 Fc.Ft/Stone</p> | <p>STANDARD 450 x 260 x 90mm 17¾ x 10¼ x 3½" 24 Units/Bundle 1.26 Fc.Ft/Stone</p> | | <p>COPING/CLOSE-END 450 x 260 x 90mm 17¾ x 10¼ x 3½" 24 Units/Bundle 1.26 Fc.Ft/Stone</p> | <p>STANDARD 450 x 260 x 90mm 17¾ x 10¼ x 3½" 24 Units/Bundle 1.26 Fc.Ft/Stone</p> |

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Textured

TECHNOLOGIES

REALA™

Cast from natural stone

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

| | WALL | CORNER |
|----------------|--------|--------|
| Bundle Type | RANDOM | RANDOM |
| Plant Produced | AYR | AYR |
| Thickness (mm) | 57 MM | 57 MM |

| FCFT PER | Bundle | 24.30 | 16.21 |
|----------|--------|-------|-------|
| | Layer | 3.0 | 4.0 |
| | Stone | 0.19 | 0.41 |

| PER BUNDLE | Layers | 8.00 | 4.00 |
|------------|----------|------|------|
| | Sections | - | - |

| LNFT PER | Bundle | 130.69 | - |
|----------|--------|--------|---|
| | Unit | 1.02 | - |

| UNITS PER | SqFt | 5.27 | 2.47 |
|-----------|----------|--------|-------|
| | Sections | - | - |
| | Bundle | 128.00 | 40.00 |

| LBS PER | Layer | 252 | 293 |
|---------|----------|-------|-------|
| | Sections | - | - |
| | Bundle | 2,015 | 1,173 |

| COLORS | Reflectance | Stock | Stock |
|---------------|----------------|-------|-------|
| Buff | SR n/a SRI n/a | ✓ | ✓ |
| Coastal Slate | SR n/a SRI n/a | ✓ | ✓ |



BUFF



COASTAL SLATE

| | | | | |
|---|---|---|---|---|
| Corner Bundle |  | LONG CORNER UNIT 17½ x 9-10 x 2¼" 450 x 230-250 x 57mm |  | SHORT CORNER UNIT 14½ x 9-10 x 2¼" 375 x 230-250 x 57mm |
| | Random Bundle |  | STANDARD UNIT 1 200 x 230-250 x 57mm 8 x 9-10 x 2¼" |  |
|  | | STANDARD UNIT 3 300 x 230-250 x 57mm 12 x 9-10 x 2¼" |  | STANDARD UNIT 4 425 x 230-250 x 57mm 17 x 9-10 x 2¼" |

Notes: All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



CROSS SECTIONS

Cross Sections are available on Unilock's Contractor website under Products: contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1

| | STANDARD/ CORNER | COPING |
|----------------|---------------------|----------|
| Bundle Type | SINGLE | SINGLE |
| Plant Produced | UXBRIDGE | UXBRIDGE |
| Thickness (mm) | 180 MM | 180 MM |

| FCFT PER | Bundle | 23.25 | 23.25 |
|----------|--------|-------|-------|
| | Layer | 7.75 | 7.75 |
| | Stone | 1.94 | 1.94 |

| PER BUNDLE | Layers | 3.00 | 3.00 |
|------------|----------|------|------|
| | Sections | - | - |

| LNFT PER | Bundle | 39.37 | 39.37 |
|----------|--------|-------|-------|
| | Unit | 3.28 | 3.28 |

| UNITS PER | SqFt | 0.52 | 0.52 |
|-----------|--------|-------|-------|
| | Layer | 4.00 | 4.00 |
| | Bundle | 12.00 | 12.00 |

| LBS PER | Unit | 257 | 257 |
|---------|--------|-------|-------|
| | Layer | 1,029 | 1,029 |
| | Bundle | 3,086 | 3,086 |

| COLORS | Reflectance | Stock | Stock |
|--------------|----------------|-------|-------|
| Almond Grove | SR.n/a SRI n/a | ✓ | ✓ |
| Granite | SR.n/a SRI n/a | ✓ | ✓ |
| Sandstone | SR.n/a SRI n/a | ✓ | ✓ |



ALMOND GROVE



GRANITE



SANDSTONE

Single Units



STANDARD/CORNER
1000 x 180 x 290mm
39 3/8 x 7 x 11 1/2"
12 units/Bundle
1.94 Fc.Ft./Stone



COPING
1000 x 180 x 290mm
39 3/8 x 7 x 11 1/2"
12 units/Bundle
1.94 Fc.Ft./Stone

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. Coping units can be used to construct steps. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - n/a

Surface Texture - Split

CROSS SECTIONS

Cross Sections are available on Unilock's

Contractor website under Products:

contractor.unilock.com

TECHNOLOGIES

CLASSIC™

Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 1372

Eligible for LEED v4.1

| | CORNER SPLIT | 333 SPLIT | 500 SPLIT | 925 SPLIT | COPING SPLIT | CLOSED-END COPING |
|--------------------|--------------|-----------|-----------|-----------|--------------|-------------------|
| Bundle Type | SINGLE | SINGLE | SINGLE | SINGLE | SINGLE | SINGLE |
| Plant Produced | UXBRIDGE | UXBRIDGE | UXBRIDGE | UXBRIDGE | UXBRIDGE | GORMLEY |
| Thickness (mm) | 185 MM | 185 MM | 185 MM | 185 MM | 185 MM | 185 MM |

| FCFT PER | Bundle | 17.19 | 18.00 | 12.00 | 6.00 | 12.00 | 14.43 |
|----------|--------|-------|-------|-------|------|-------|-------|
| | Layer | 5.73 | 6.00 | 4.00 | 2.00 | 4.00 | 4.81 |
| | Stone | 2.87 | 2.00 | 2.00 | 2.00 | 2.00 | 2.41 |

| PER BUNDLE | Layer | 3.00 | 3.00 | 3.00 | 3.00 | 3.00 | 3.00 |
|------------|----------|------|------|------|------|------|------|
| | Sections | - | - | - | - | - | - |

| LNFT PER | Bundle | - | 29.25 | 19.50 | 9.75 | - | 23.70 |
|----------|--------|---|-------|-------|------|---|-------|
| | Unit | - | 3.25 | 3.25 | 3.25 | - | 3.95 |

| UNITS PER | SqFt | 0.35 | 0.50 | 0.50 | 0.50 | 0.50 | 0.42 |
|-----------|--------|------|------|------|------|------|------|
| | Layer | 2.00 | 3.00 | 2.00 | 1.00 | 2.00 | 2.00 |
| | Bundle | 6.00 | 9.00 | 6.00 | 3.00 | 6.00 | 6.00 |

| LBS PER | Unit | 477 | 318 | 477 | 954 | 477 | 570 |
|---------|--------|-------|-------|-------|-------|-------|-------|
| | Layer | 954 | 954 | 954 | 954 | 927 | 1,140 |
| | Bundle | 2,862 | 2,862 | 2,862 | 2,862 | 2,780 | 3,420 |

| COLORS | Reflectance | Stock | Stock | Stock | Stock | Stock | Stock |
|---------|----------------|-------|-------|-------|-------|-------|-------|
| Granite | SR.n/a SRI n/a | SO | SO | SO | SO | SO | ✓ |
| Sierra | SR.n/a SRI n/a | SO | SO | SO | SO | SO | |



GRANITE



SIERRA

| Single Units | CORNER SPLIT | STANDARD 333 SPLIT | STANDARD 500 SPLIT | STANDARD 925 SPLIT | COPING SPLIT | C-E COPING |
|--------------|--|---|---|---|---|---|
| | 925 x 185 x 500mm 36 1/2 x 7 3/8 x 19 3/4" 6 units/Bundle 2.87 Fc.Ft./Stone | 1000 x 185 x 333mm 39 3/8 x 7 3/8 x 13" 9 units/Bundle 2.00 Fc.Ft./Stone | 1000 x 185 x 500mm 39 3/8 x 7 3/8 x 19 3/4" 6 units/Bundle 2.00 Fc.Ft./Stone | 1000 x 185 x 925mm 39 3/8 x 7 3/8 x 36 1/2" 3 units/Bundle 2.00 Fc.Ft./Stone | 1000 x 185 x 500mm 39 3/8 x 7 3/8 x 19 3/4" 6 units/Bundle 2.00 Fc.Ft./Stone | 1200 x 185 x 500mm 47 1/4 x 7 3/8 x 19 3/4" 6 units/Bundle 2.41 Fc.Ft./Stone |

Notes: **Special Order - Lead time is required, minimum quantities apply.** Product is sold on a required, refundable skid. Coping units can be used to construct steps. Unilock, through Risi Stone® Systems International, can provide preliminary site engineering for most commercial projects. Soils information, site drawings, and loading requirements are some of the information details required in order to provide this preliminary site engineering. Retaining wall engineering software is also available free of charge at www.unilock.com. All measurements are nominal. Contact Unilock for more information.

U-Cara® Multi-Face Wall System



APPLICATIONS



APPEARANCE

Edge Detail - n/a

Surface Texture - Smooth, Standard, Series Exposed, Umbriano Mottled and Pitched

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

COLORFUSION™ (UMBRIANO)

Subtly mottled colored finish


TECHNICAL INFORMATION

Conforms to ASTM C1372

Eligible for LEED v4.1 credits



Download the U-Cara Multi-Face Wall Installation Guide.

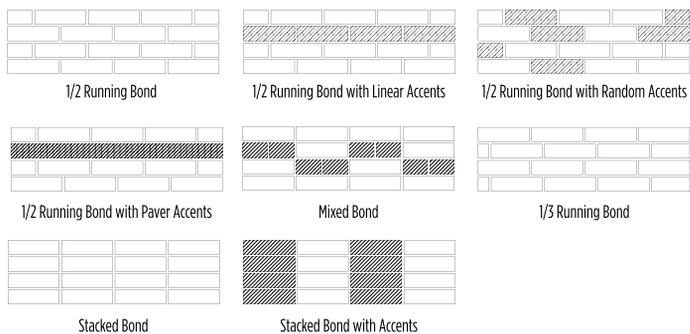

U-Cara® Multi-Face Wall System

| | 6" STANDARD FASCIA PANEL SMOOTH | 6" CLOSED-END FASCIA PANEL SMOOTH | 3" STANDARD FASCIA PANEL SERIES EXPOSED | 6" STANDARD FASCIA PANEL PITCHED | 6" CLOSED-END FASCIA PANEL PITCHED | STANDARD CLOSED-END UMBRIANO | STANDARD FASCIA UMBRIANO |
|--------------------|---------------------------------|-----------------------------------|---|----------------------------------|------------------------------------|------------------------------|--------------------------|
| Bundle Type | SINGLE | SINGLE | SINGLE | SINGLE | SINGLE | SINGLE | SINGLE |
| Plant Produced | NEW YORK | NEW YORK | CHICAGO | NEW YORK | NEW YORK | ONTARIO | ONTARIO |
| Thickness (mm) | 150 MM | 150 MM | 71 MM | 150 MM | 150 MM | 150 MM | 150 MM |

| FCFT PER | Bundle | 61.52 | 45.15 | 59.32 | 61.52 | 45.15 | 54.18 | 61.52 |
|----------|--------|-------|-------|-------|-------|-------|-------|-------|
| | Layer | 10.25 | 9.03 | 9.89 | 10.25 | 9.03 | 9.03 | 10.25 |
| | Stone | 0.73 | 1.29 | 0.18 | 0.73 | 1.29 | 1.29 | 0.73 |

| PER BUNDLE | Layers | 6.00 | 5.00 | 6.00 | 6.00 | 5.00 | 6.00 | 6.00 |
|------------|----------|------|------|------|------|------|------|------|
| | Sections | - | - | - | - | - | - | - |

| LNFT PER | Bundle | 129.50 | 74.95 | 256.70 | 129.50 | 89.95 | 107.94 | 129.50 |
|----------|--------|--------|-------|--------|--------|-------|--------|--------|
| | Unit | 1.54 | 2.14 | 0.75 | 1.54 | 2.57 | 2.57 | 1.54 |

| UNITS PER | SqFt | 1.37 | 0.78 | 5.66 | 1.37 | 0.78 | 0.78 | 1.37 |
|-----------|--------|-------|-------|--------|-------|-------|-------|-------|
| | Layer | 14.00 | - | 56.00 | 14.00 | 7.00 | - | 14.00 |
| | Bundle | 84.00 | 35.00 | 336.00 | 84.00 | 35.00 | 42.00 | 84.00 |

| LBS PER | Layer | 274 | 207 | 250 | 291 | 236 | 207 | 252 |
|---------|----------|-------|-------|-------|-------|-------|-------|-------|
| | Sections | - | - | - | - | - | - | - |
| | Bundle | 1,647 | 1,033 | 1,501 | 1,745 | 1,179 | 1,240 | 1,513 |

| COLORS | Reflectance | Stock |
|----------------|----------------|-------|-------|-------|-------|-------|-------|-------|
| Dark Charcoal | SR.n/a SRI n/a | SO | SO | | | | | |
| Fossil | SR.n/a SRI n/a | ✓ | ✓ | | ✓ | ✓ | | |
| Steel Mountain | SR.n/a SRI n/a | ✓ | ✓ | | ✓ | ✓ | | |
| Opal | SR.n/a SRI n/a | ✓ | ✓ | | | | | |
| Onyx Black | SR.n/a SRI n/a | | | ✓ | | | | |
| Walnut | SR.n/a SRI n/a | ✓ | ✓ | | ✓ | ✓ | | |
| French Grey | SR n/a SRI n/a | | | | | | SO | SO |
| Summer Wheat | SR n/a SRI n/a | | | | | | SO | SO |
| Winter Marvel | SR n/a SRI n/a | | | | | | SO | SO |

| | | | | |
|---------------------|---|---|---|---|
| Single Panel Bundle |  | 6" STANDARD FASCIA PANEL 5 7/8 x 18 3/8 x 2 3/8" 150 x 466 x 60mm 84 units/Bundle .73 Fc.Ft./Stone |  | 3" FASCIA PANEL 2 7/8 x 9 x 2 3/8" 71 x 231 x 60mm 336 units/Bundle .18 Fc.Ft./Stone |
| | 2 Unit Corner Bundle |  | STANDARD FASCIA HALF PANEL 5 7/8 x 9 1/4 x 2 3/8" 150 x 233 x 60mm 35 units/Bundle 0.36 Fc.Ft./Stone |  |


Notes: For Special Order Items - Lead time is required, minimum quantities apply. Sold in full bundles. Produced and sold on a required refundable skid. The Dark Charcoal Corner Bundle is 54.2 Face Feet/ Bundle. Contact Customer Service for details.

U-Cara® Multi-Face Wall System

NEW DESIGNS COMING SOON



APPLICATIONS



CROSS SECTIONS

All Cross Sections are available on Unilock's Contractor web site under Products:
contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Smooth

TECHNOLOGIES

ENDURACOLOR™

Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C1372
Eligible for LEED v4.1 credits

| | LAVANO STANDARD | SUBWAY STANDARD |
|-----------------------|-----------------|-----------------|
| Bundle Type | SINGLE | SINGLE |
| Thickness (mm) | 150 MM | 150 MM |

| FCFT PER | Bundle | 61.52 | 61.52 |
|----------|----------|-------|-------|
| | Layer | 10.25 | 10.25 |
| | Sections | - | - |
| | Stone | 0.73 | 0.73 |



| PER BUNDLE | Layers | 6.00 | 6.00 |
|------------|----------|------|------|
| | Sections | - | - |

| LNFT PER | Bundle | 129.50 | 129.50 |
|----------|--------|--------|--------|
| | Unit | 1.54 | 1.54 |


| UNITS PER | SqFt | 1.37 | 1.37 |
|-----------|----------|-------|-------|
| | Sections | - | - |
| | Bundle | 84.00 | 84.00 |

| LBS PER | Layer | 252.00 | 252.00 |
|---------|----------|--------|--------|
| | Sections | - | - |
| | Bundle | 1,513 | 1,513 |

| COLORS | Reflectance | Stock | Stock |
|----------------|----------------|-------|-------|
| Granite Fusion | SR n/a SRI n/a | SO | - |
| Fossil | SR n/a SRI n/a | SO | - |
| Dark Charcoal | SR n/a SRI n/a | - | SO |
| Opal | SR n/a SRI n/a | - | SO |
| Ivory | SR n/a SRI n/a | - | SO |

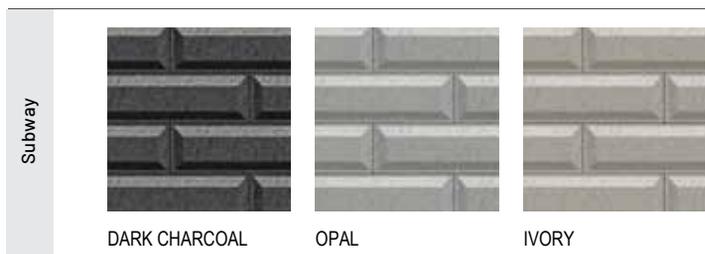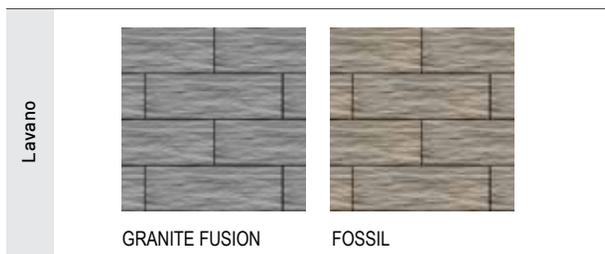

LAVANO STANDARD FASCIA PANEL
5 7/8 x 18 3/8 x 2 3/8"
150 x 466 x 60mm
84 units/Bundle
.73 Fc.Ft./Stone

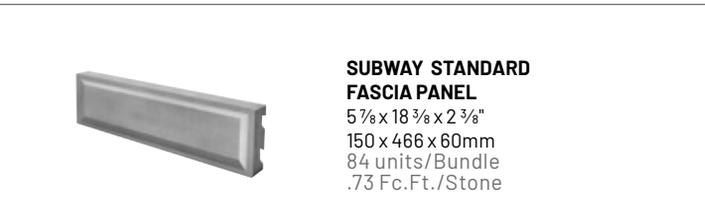


SUBWAY STANDARD FASCIA PANEL
5 7/8 x 18 3/8 x 2 3/8"
150 x 466 x 60mm
84 units/Bundle
.73 Fc.Ft./Stone

Notes: **Special Order - Lead time is required, minimum quantities apply. SOLD IN FULL BUNDLES ONLY** Produced and sold on a required refundable skins. Contact Customer Service for details.

U-Cara® Multi-Face Wall System



APPLICATIONS



ENDURACOLOR™

Refined surface and long-lasting color

COLORFUSION™

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 1262
Eligible for LEED v4.1

CROSS SECTIONS


All Cross Sections are available on Unilock's Contractor website under Products:

contractor.unilock.com

APPEARANCE

Edge Detail - n/a
Surface Texture - Smooth,
Standard, Series™ Exposed,
Umbriano® Mottled,
Pitched & Flamed


U-CARA RETAINING WALL GEOGRID SECTIONS

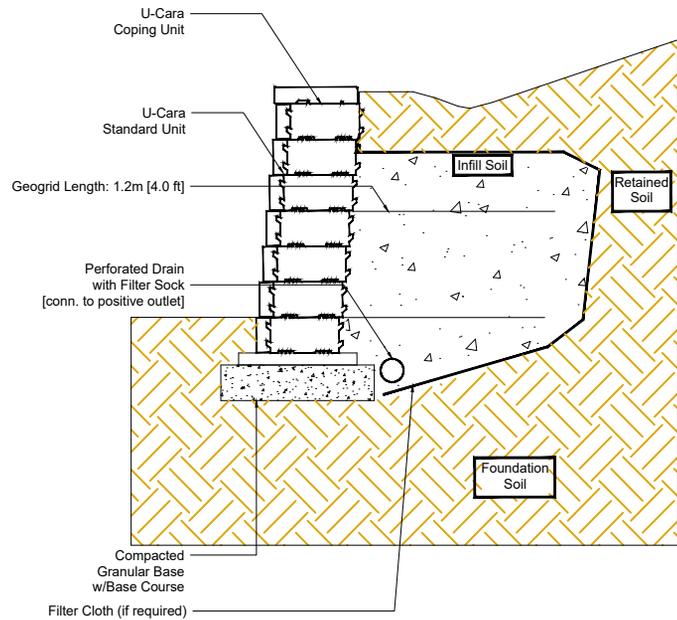

U-CARA®

CROSS SECTION

Garden Wall - Max Height 15"

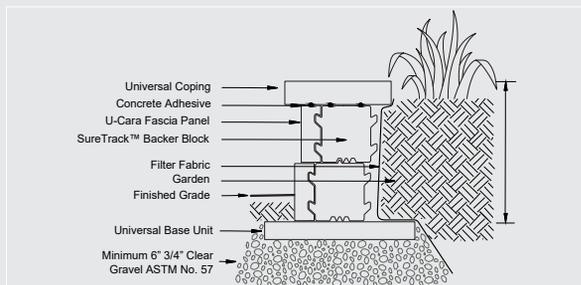


Notes:
This cross section is intended for preliminary design purposes only. Confirm site conditions and consult with a qualified design professional or installer prior to installation.

U-CARA®

CROSS SECTION

Seat Wall - Max Height 21"

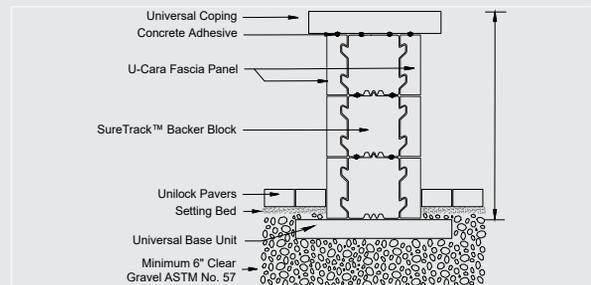

Notes:
This cross section is intended for preliminary design purposes only. Confirm site conditions and consult with a qualified design professional or installer prior to installation.

U-Cara® Multi-Face Wall System

Components



SURE TRACK CORNER BACKER
6⁷/₈ x 5⁷/₈ x 11⁵/₈"
175 x 150 x 294mm



SURE TRACK LARGE BACKER
7¹/₂ x 5⁷/₈ x 11⁵/₈"
190 x 150 x 294mm



SURE TRACK STANDARD BACKER
7¹/₂ x 5⁷/₈ x 5⁷/₈"
190 x 150 x 150mm

| | CORNER/ PILLAR BACKER | LARGE BACKER | STANDARD BACKER | UNIVERSAL BASE UNIT |
|--------------------|--------------------------|--------------|-----------------|---------------------|
| Bundle Type | SINGLE | SINGLE | SINGLE | SINGLE |
| Plant Produced | UXBRIDGE | UXBRIDGE | UXBRIDGE | UXBRIDGE |
| Thickness (mm) | 150 MM | 150 MM | 150 MM | 55 MM |

| FCFT PER | Bundle | 42.40 | 20.35 | 33.91 | - |
|----------|--------|-------|-------|-------|---|
| | Layer | 10.60 | 6.78 | 11.30 | - |
| | Stone | 0.76 | 0.32 | 0.32 | - |

| PER BUNDLE | Layers | 4.00 | 3.00 | 3.00 | 9.00 |
|------------|----------|------|------|------|------|
| | Sections | - | - | - | - |

| LNFT PER | Bundle | - | 41.34 | 69.99 | 85.50 |
|----------|--------|---|-------|-------|-------|
| | Unit | - | 0.66 | 0.67 | 1.58 |

| UNITS PER | SqFt | 1.32 | 3.10 | 3.10 | - |
|-----------|--------|-------|-------|--------|-------|
| | Layer | 14.00 | 21.00 | 35.00 | 6.00 |
| | Bundle | 56.00 | 63.00 | 105.00 | 54.00 |

| LBS PER | Unit | 36 | 42 | 22 | 46 |
|---------|--------|-------|-------|-------|-------|
| | Layer | 498 | 878 | 773 | 278 |
| | Bundle | 1,992 | 2,635 | 2,320 | 2,502 |

Smooth Panel



FOSSIL



DARK CHARCOAL



OPAL



STEEL MOUNTAIN



WALNUT

Series 3" Panel



ONYX BLACK


Pitched Panel



FOSSIL



WALNUT



STEEL MOUNTAIN

Umbriano® Panel



FRENCH GREY



SUMMER WHEAT



WINTER MARVEL

Recommended Base Unit



UNIVERSAL BASE UNIT
14 x 19 x 2¹/₄"
355 x 482 x 55mm
54 units/bundle

Extra Components




SURE TRACK CORNER INSERT
L = 2"
50mm

Notes: Product is shipped on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.

U-Cara® Modular System

The U-Cara Modular System offers a variety of aluminum frames that can be mixed and matched to construct vertical features like grill islands. Speak to your contractor to select a design and a U-Cara fascia panel finish to suit your project.

With the U-Cara Modular System you can build Grill Islands, Bars, Back splashes, Fire Places and Pillars.

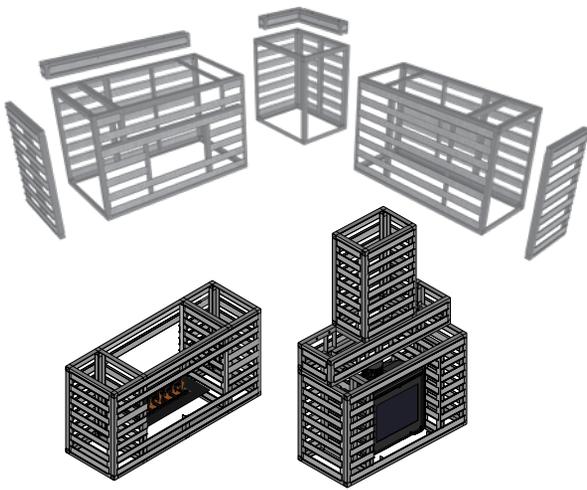

| NO. | MODEL | DESCRIPTION |
|----------------|---------------|--|
| UCARA000001 | URS | UCARA 8' RAIL (10/PACK) |
| UCARA000003 | URS | ALIGNMENT BARS 39" (10/PACK) |
| UCARA000007 | UL-OSK | CABINET DEPTH CHANGE KIT |
| RS-UCARA000009 | UL-FIR | U-CARA FIREPLACE |
| RS-UCARA000010 | UL-FIR-M | U-CARA FIREPLACE MANTLE |
| RS-UCARA000015 | UL-HCK-CC | U-CARA HEIGHT CONVERSION CORNER CAB |
| RS-UCARA000016 | UL-FIR-MW | U-CARA FIREPLACE MANTLE WIDE UNIT |
| RS-UCARA000017 | UL-FIR-CH | U-CARA U-CARA FIREPLACE CHIMNEY UNIT |
| RS-UCARA000018 | UL-FIR-CH-MW | U-CARA FIREPLACE CHIMNEY WIDE UNIT |
| RS-UCARA000019 | UL-FIR-RTN | U-CARA FIREPLACE RETURN |
| RS-UCARA000020 | UL-FIR-RTN-OS | U-CARA FIREPLACE RETURN OVERSIZED |
| UCARA001000 | UL-GC | UNIVERSAL GRILL CABINET (fits 36"-42" grill) |
| UCARA002000 | UL-BC | BASE CABINET (fits fire table or fridge) |
| UCARA003000 | UL-CC | CORNER CABINET 27.5" x 27.5" |
| UCARA003001 | UL-CC-OS | CORNER CABINET 27.5" x 36.5" OS |
| UCARA003002 | UL-CC-BP | CORNER CABINET BACK PANEL |
| UCARA004000 | UL-ECK | END CLAD KIT 27.5" |
| UCARA004001 | UL-ECK-OS | END CLAD KIT 36.5" OS |
| UCARA005000 | UL-BS | BACKSPLASH-GRILL/BASE UNIT 64½" |
| UCARA005001 | UL-BS-CC | BACKSPLASH CORNER CABINET |
| UCARA005002 | UL-BS-CC-OS | BACKSPLASH CORNER CABINET OS |
| UCARA006000 | UL-DD | STAINLESS DOUBLE ACCESS DOORS 27" |
| UCARA007000 | UL-PU | PILLAR UNIT (18⅜" x 18⅜") |
| RS-UCARA001002 | UL-GC-36 | UNIVERSAL GRILL CABINET (FITS 36"-42" GRILL) |
| RS-UCARA002001 | UL-BC-36 | BASE CABINET (FITS FIRE TABLE OR FRIDGE) |
| RS-UCARA003004 | UL-CC-OS-36 | CRNR CABINET 27.5X36.5 OS |
| RS-UCARA003005 | UL-CC-36 | CORNER CABINET 27.5X27.5 |
| RS-UCARA004002 | UL-ECK-36 | END CLAD KIT 27.5" |
| RS-UCARA004003 | UL-ECK-OS-36 | END CLAD KIT 36.5" OS |



Download the U-Cara Modular Fireplace Installation Guide.

U-Cara® Mount System



The U-Cara Wall Mount System allows you to put the finishing touches on your project by cladding existing structures like unsightly exposed foundation areas or concrete steps with U-Cara fascia panels.



U-CARA ALIGNMENT BAR:
39" LENGTH - SOLD IN PACKS OF 10 PIECES

U-CARA RAILS:
8' LENGTH - SOLD IN PACKS OF 10 PIECES



APPLICATIONS



APPEARANCE

Edge Detail - n/a
 Surface Texture - Smooth
 Joint Spacing - 3mm

TECHNOLOGIES

ENDURACOLOR™
 Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

| | | |
|--------------------|---------------------------|-----------------------|
| | 28 x 28 PILLAR CAP | 12 x 24 COPING |
| Bundle Type | SINGLE | SINGLE |
| Plant Produced | NEW YORK | NEW YORK |
| Thickness (mm) | 100 MM | 60 MM |

| | | | |
|-----------------|--------|------|-------|
| FCFT PER | Bundle | 3.06 | 14.42 |
| | Layer | 0.77 | 2.40 |
| | Stone | 0.77 | 0.40 |

| | | | |
|-------------------|----------|------|------|
| PER BUNDLE | Layers | 4.00 | 6.00 |
| | Sections | - | - |

| | | | |
|-----------------|--------|------|------|
| LNFT PER | Bundle | 9.36 | 73.2 |
| | Unit | 2.34 | 2.03 |

| | | | |
|------------------|--------|------|-------|
| UNITS PER | SqFt | 1.31 | 0.48 |
| | Layer | 1.00 | 6.00 |
| | Bundle | 4.00 | 36.00 |

| | | | |
|----------------|----------|-----|-------|
| LBS PER | Layer | 234 | 341 |
| | Sections | - | - |
| | Bundle | 935 | 2,044 |

| COLORS | Reflectance | Stock | Stock |
|---------------|----------------|-------|-------|
| Light Grey | SR n/a SRI n/a | ✓ | ✓ |
| Dark Charcoal | SR n/a SRI n/a | ✓ | ✓ |
| Sandstone | SR n/a SRI n/a | | ✓ |



LIGHT GREY



DARK CHARCOAL



SANDSTONE

Single Unit



PILLAR CAP
 711 x 711 x 100 mm
 28 x 28 x 3 7/8"
 4 unit/Bundle
 .77 Fc.Ft./Stone



COPING
 310 x 620 x 60mm
 12 x 24 x 2 3/8"
 36 units/Bundle
 .40 Fc.Ft/Stone

Notes: Coping units can be adhered to pool edge using concrete adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics. Product is shipped on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
 Surface Texture - Smooth
 Joint Spacing - 2 mm

TECHNOLOGIES

CLASSIC™
 Budget-friendly traditional product mix

TECHNICAL INFORMATION

Conforms to ASTM C 936
 Eligible for LEED v4.1 credits

| | |
|--------------------|-----------------|
| | STANDARD |
| Bundle Type | SINGLE |
| Plant Produced | UXBRIDGE |
| Thickness (mm) | 60 MM |

| | | |
|-----------------|--------|---|
| FCFT PER | Bundle | - |
| | Layer | - |
| | Stone | - |

| | | |
|-------------------|----------|------|
| PER BUNDLE | Layers | 4.00 |
| | Sections | - |

| | | |
|-----------------|--------|--------|
| LNFT PER | Bundle | 104.00 |
| | Unit | 0.50 |


| | | |
|------------------|--------|--------|
| UNITS PER | SqFt | 2.00 |
| | Layer | 52.00 |
| | Bundle | 208.00 |

| | | |
|----------------|--------|--------|
| LBS PER | Unit | 14 |
| | Layer | 698.00 |
| | Bundle | 2,791 |

| COLORS | Reflectance | Stock |
|--------------|-----------------|-------|
| Almond Grove | SR. n/a SRI n/a | ✓ |
| Charcoal | SR. n/a SRI n/a | ✓ |
| Limestone | SR. n/a SRI n/a | ✓ |
| Sierra | SR. n/a SRI n/a | ✓ |



ALMOND GROVE



CHARCOAL



LIMESTONE



SIERRA

Single Unit



STANDARD
 150 x 300 x 60mm
 5⁷/₈ x 11⁷/₈ x 2³/₈"

Notes: Units can be adhered to pool edge using Concrete Adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics. Product is shipped on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.

Ledgestone™ Fullnose, Coping & Closed-End Coping



APPLICATIONS



APPEARANCE

Edge Detail - n/a
Surface Texture - Textured

TECHNOLOGIES

REALA™
Cast from natural stone

STONEMARK™

Natural stone appearance

TECHNICAL INFORMATION

Conforms to ASTM C 1776
Eligible for LEED v4.1 credits

| | FULLNOSE COPING | STANDARD COPING | STANDARD CLOSED-END | LARGE COPING | LARGE CLOSED-END |
|--------------------|-----------------|-----------------|---------------------|---------------|------------------|
| Bundle Type | SINGLE | SINGLE | SINGLE | SINGLE | SINGLE |
| Plant Produced | CHICAGO | CHICAGO | CHICAGO | CHICAGO | CHICAGO |
| Thickness (mm) | 60 MM | 70 MM | 70 MM | 70 MM | 70 MM |

| FCFT PER | Bundle | 5.12 | 5.52 | 5.52 | 6.87 | 6.87 |
|----------|--------|------|------|------|------|------|
| | Layer | - | - | - | - | - |
| | Stone | 0.39 | 0.46 | 0.46 | 0.57 | 0.57 |

| PER BUNDLE | Layers | - | - | - | - | - |
|------------|----------|---|---|---|---|---|
| | Sections | - | - | - | - | - |

| LNFT PER | Bundle | 26.00 | 24.00 | 24.00 | 30.00 | 30.00 |
|----------|--------|-------|-------|-------|-------|-------|
| | Unit | 2.00 | 2.00 | 2.00 | 2.50 | 2.50 |

| UNITS PER | SqFt | 2.54 | 2.18 | 2.18 | 1.75 | 1.75 |
|-----------|----------|-------|-------|-------|-------|-------|
| | Sections | - | - | - | - | - |
| | Bundle | 13.00 | 12.00 | 12.00 | 12.00 | 12.00 |

| LBS PER | Unit | 52 | 64 | 66 | 94 | 93 |
|---------|----------|-----|-----|-----|-------|-------|
| | Sections | - | - | - | - | - |
| | Bundle | 667 | 772 | 796 | 1,128 | 1,116 |

| COLORS | Reflectance | Stock | Stock | Stock | Stock | Stock |
|--------|----------------|-------|-------|-------|-------|-------|
| Buff | SR.n/a SRI n/a | ✓ | ✓ | ✓ | ✓ | ✓ |
| Grey | SR.n/a SRI n/a | ✓ | ✓ | ✓ | ✓ | ✓ |



BUFF



GREY

| Single Units | FULLNOSE COPING | STANDARD COPING | STANDARD CLOSED-END COPING | LARGE COPING | LARGE CLOSED-END COPING |
|--------------|--|--|--|--|--|
| | 610 x 305 x 60mm 24 x 12 x 2 3/8" 13 unit/Bundle .39 Fc.Ft./Stone | 610 x 305 x 70mm 24 x 12 x 2 3/4" 12 unit/Bundle .46 Fc.Ft./Stone | 610 x 305 x 70mm 24 x 12 x 2 3/4" 12 unit/Bundle .46 Fc.Ft./Stone | 762 x 343 x 70mm 30 x 13 1/2 x 2 3/4" 12 unit/Bundle .57 Fc.Ft./Stone | 762 x 343 x 70mm 30 x 13 1/2 x 2 3/4" 12 unit/Bundle .57 Fc.Ft./Stone |

Notes: This product is produced and sold on a required, refundable skid. Coping is rock faced on the front and the back; Closed-end coping is rock faced on three sides. Units can be adhered to pool edge using concrete adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics. All measurements are nominal. Contact Unilock for more information.

Ledgestone™ Pillar Cap



APPLICATIONS



APPEARANCE

Edge Detail - n/a
Surface Texture - Textured

TECHNOLOGIES

REALA™

Cast from natural stone

STONEMARK™

Natural stone appearance

TECHNICAL INFORMATION

Conforms to ASTM C 1776
Eligible for LEED v4.1 credits



BUFF

GREY

Single Unit



24" PILLAR CAP
610 x 610 x 100mm
24 x 24 x 3 7/8"
5 unit/Bundle
.66 Fc.Ft./Stone

| | | |
|--|--------------------|---------------------------|
| | | 24" PILLAR CAP |
| | Bundle Type | SINGLE |
| | Plant Produced | CHICAGO |
| | Thickness (mm) | 100 MM |

| | | |
|-----------------|--------|------|
| FCFT PER | Bundle | 3.28 |
| | Layer | 0.66 |
| | Stone | 0.66 |

| | | |
|-------------------|----------|------|
| PER BUNDLE | Layers | 5.00 |
| | Sections | - |

| | | |
|-----------------|--------|-------|
| LNFT PER | Bundle | 10.04 |
| | Unit | 2.01 |

| | | |
|------------------|----------|------|
| UNITS PER | SqFt | 1.52 |
| | Sections | - |
| | Bundle | 5.00 |

| | | |
|----------------|----------|-----|
| LBS PER | Unit | 159 |
| | Sections | - |
| | Bundle | 795 |

| COLORS | Reflectance | Stock |
|---------------|--------------------|--------------|
| Buff | SR.n/a SRI n/a | ✓ |
| Grey | SR.n/a SRI n/a | ✓ |

Notes: This product is produced and sold on a required, refundable skid. Pillar Cap is rock faced all four sides; All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Rounded
 Surface Texture - Umbriano Mottled
 Joint Spacing - 3mm

TECHNOLOGIES

ENDURACOLOR[™]

Refined surface and long-lasting color

EASYCLEAN[™]

Factory sealed to provide integral stain resistance

COLORFUSION[™]

Subtly mottled colored finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372
 Eligible for LEED v4.1 credits

| | CHAMFERED | BULLNOSE |
|--------------------|-----------|----------|
| Bundle Type | SINGLE | SINGLE |
| Plant Produced | ONTARIO | ONTARIO |
| Thickness (mm) | 60 MM | 60 MM |

| FCFT PER | Bundle | 9.30 | 9.30 |
|----------|--------|------|------|
| | Layer | - | - |
| | Stone | 0.39 | 0.39 |

| PER BUNDLE | Layers | 6.00 | 6.00 |
|------------|----------|------|------|
| | Sections | - | - |

| LNFT PER | Unit | 1.97 | 1.97 |
|----------|--------|-------|-------|
| | Bundle | 47.24 | 47.24 |


| UNITS PER | SqFt | - | - |
|-----------|--------|-------|-------|
| | Layer | 4.00 | 4.00 |
| | Bundle | 24.00 | 24.00 |

| LBS PER | Unit | 63 | 63 |
|---------|--------|-------|-------|
| | Layer | 337 | 337 |
| | Bundle | 1,510 | 1,510 |


| COLORS | Reflectance | Stock | Stock |
|---------------|---------------|-------|-------|
| French Grey | SR .18 SRI 17 | ✓ | ✓ |
| Grenada White | SR .45 SRI 52 | ✓ | ✓ |
| Midnight Sky | SR .17 SRI 15 | ✓ | ✓ |
| Summer Wheat | SR .42 SRI 48 | SO | SO |
| Winter Marvel | SR .35 SRI 38 | SO | SO |



FRENCH GREY



GRENADA WHITE



MIDNIGHT SKY



SUMMER WHEAT



WINTER MARVEL

Single Units



CHAMFERED

360 x 600 x 60 mm
 14 x 24 x 2 3/8
 24 units/Bundle



BULLNOSE

360 x 600 x 60 mm
 14 x 24 x 2 3/8
 24 units/Bundle

Notes: **SOLD IN FULL BUNDLES ONLY** and is produced and sold on a required, refundable skid. Units can be adhered to pool edge using concrete adhesive, or with mortar. Always observe proper construction techniques when adhering pavers to a surface. Consult your local pool contractors for installation specifics. All measurements are nominal. Contact Unilock for more information.

Universal Coping & Base

ENDURACOLOR™ / CLASSIC



APPLICATIONS



APPEARANCE

Edge Detail - n/a
Surface Texture - Smooth

TECHNOLOGIES

CLASSIC™ (BASE)
Budget-friendly traditional product mix

ENDURACOLOR™ (COPING)
Refined surface and long-lasting color

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

| | UNIVERSAL BASE | UNIVERSAL COPING |
|----------------|----------------|------------------|
| Bundle Type | SINGLE | SINGLE |
| Plant Produced | UXBRIDGE | NEW YORK |
| Thickness (mm) | 55 MM | 70 MM |

| FCFT PER | Bundle | - | 17.44 |
|----------|--------|---|-------|
| | Layer | - | 2.18 |
| | Stone | - | 0.36 |

| PER BUNDLE | Layers | 9.00 | 8.00 |
|------------|----------|------|------|
| | Sections | - | - |

| LNFT PER | Bundle | 85.50 | 75.90 |
|----------|--------|-------|-------|
| | Unit | 1.58 | 1.58 |


| UNITS PER | SqFt | - | 2.75 |
|-----------|----------|-------|-------|
| | Sections | - | - |
| | Bundle | 54.00 | 48.00 |

| LBS PER | Layer | 278 | 358 |
|---------|----------|-------|-------|
| | Sections | - | - |
| | Bundle | 2,502 | 2,864 |

| COLORS | Reflectance | Stock | Stock |
|---------------|----------------|-------|-------|
| Light Grey | SR.n/a SRI n/a | | ✓ |
| Dark Charcoal | SR.n/a SRI n/a | | ✓ |
| Natural | SR.n/a SRI n/a | ✓ | |



LIGHT GREY



MIDNIGHT CHARCOAL



NATURAL

Single Units



UNIVERSAL COPING
355 x 482 x 70mm
14 x 19 x 2 ¾"
48 units/Bundle
.36 Fc.Ft./Stone



UNIVERSAL BASE
355 x 482 x 55mm
14 x 19 x 2 ¾"
54 units/Bundle

Notes: **SOLD IN FULL BUNDLES ONLY** and is shipped on a required, refundable skid. All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Standard

TECHNOLOGIES

CLASSIC™
Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1372
Eligible for LEED v4.1 credits

| | SUNSET SQUARE W / INSERT | SUNSET ROUND W / INSERT |
|--------------------|-----------------------------|----------------------------|
| Bundle Type | SINGLE | SINGLE |
| Dimension Metric | 1100 x 1100 x 400mm | 1300 x 1300 x 400mm |
| Dimension Imperial | 43 3/8 x 43 3/8 x 15 3/4" | 51 1/4 x 51 1/4 x 15 3/4" |

| DIAMETER (inch) | Outside | 43 | 52 |
|--------------------|---------|----|----|
| | Inside | 29 | 36 |
| | Insert | 27 | 35 |

| | | |
|-----------------|----|----|
| LAYER PER UNIT | 4 | 4 |
| UNIT PER LAYER | 12 | 18 |
| UNIT PER PALLET | 48 | 72 |

| | | |
|----------------|-------|-------|
| LBS PER PALLET | 1,357 | 1,499 |
|----------------|-------|-------|

| COLORS | Reflectance | Stock | Stock |
|--------------|-----------------|-------|-------|
| Almond Grove | SR. n/a SRI n/a | ✓ | ✓ |
| Limestone | SR. n/a SRI n/a | ✓ | ✓ |
| Sierra | SR. n/a SRI n/a | ✓ | ✓ |




ALMOND GROVE



LIMESTONE



SIERRA



UNILOCK REDUCED SMOKE INSERT

SUNSET ROUND FIRE PITS AVAILABLE WITH ZENTRO TECHNOLOGY FIRE PIT INSERT

There's nothing like relaxing around a firepit to bring family and friends closer together. But with ordinary firepits, smoke always blows in someone's face - usually yours. With Unilock Reduced Smoke Inserts, stinging eyes are a thing of the past. Zentro's patent-pending technology reburns smoke before it gets anywhere near your eyes. Say hello to good times and good-bye to smoke.

The following accessories are available for any fire pit kit.
Contact your local Territory Manager for details.



ROUND FIRE SCREEN
(works with Sunset Round only)



24" SWING AWAY GRILL



KETTLE HOOK



ACCESSORY POST
WITH COLLAR

Single Unit



SUNSET SQUARE W/INSERT
1100 x 1100 x 400mm
43 3/8 x 43 3/8 x 15 3/4"



SUNSET ROUND W/INSERT
1300 x 1300 x 400mm
51 1/4 x 51 1/4 x 15 3/4"

FIRE PIT WARNING

Wood-burning fire pits must be lined with a proper metal insert or refractory (fire-rated) brick to protect the concrete components from extreme exposure to heat. Extreme heat on a concrete surface may affect the structural integrity of the concrete and can be dangerous. The floor of the fire pit should always be constructed using refractory brick or a sand bed. For your safety, always use a spark screen over the fire.

Notes: All measurements are nominal. Contact Unilock for more information.



APPLICATIONS



APPEARANCE

Edge Detail - Zero
Surface Texture - Split

TECHNOLOGIES

CLASSIC™
Budget-friendly traditional product mix

ANTIQUED™

Distressed, timeworn finish

TECHNICAL INFORMATION

Conforms to ASTM C 1776
Eligible for LEED v4.1 credits

| | |
|--------------------|------------------------------------|
| | ROMANSTACK ROUND W / INSERT |
| Bundle Type | SINGLE |
| Dimension Metric | 1525 x 1525 x 400mm |
| Dimension Imperial | 60 x 60 x 15 3/4" |

| | | |
|------------------------|---------|----|
| DIAMETER (inch) | Outside | 60 |
| | Inside | 44 |
| | Insert | 43 |

| | |
|------------------------|----|
| LAYER PER UNIT | 4 |
| UNIT PER LAYER | 24 |
| UNIT PER PALLET | 96 |

| | |
|-----------------------|-------|
| LBS PER PALLET | 1,725 |
|-----------------------|-------|

| COLORS | Reflectance | Stock |
|--------------|-----------------|-------|
| Almond Grove | SR. n/a SRI n/a | ✓ |
| Granite | SR. n/a SRI n/a | ✓ |
| Sierra | SR. n/a SRI n/a | ✓ |



ALMOND GROVE



GRANITE



SIERRA

The following accessories are available for any fire pit kit.

Contact your local Territory Manager for details.



24" SWING AWAY GRILL



KETTLE HOOK



ACCESSORY POST WITH COLLAR

Single Unit



ROMANSTACK ROUND W/INSERT
1525 x 1525 x 400mm
60 x 60 x 15 3/4"

FIRE PIT WARNING

Wood-burning fire pits must be lined with a proper metal insert or refractory (fire-rated) brick to protect the concrete components from extreme exposure to heat. Extreme heat on a concrete surface may affect the structural integrity of the concrete and can be dangerous. The floor of the fire pit should always be constructed using refractory brick or a sand bed. For your safety, always use a spark screen over the fire.

Notes: All measurements are nominal. Contact Unilock for more information.

Architectural Paver Collection



3 7/8 x 7 7/8 x 2 3/4"
100 x 200 x 70mm



3 7/8 x 11 7/8 x 2 3/4"
100 x 300 x 70mm



5 7/8 x 11 7/8 x 2 3/4"
150 x 304 x 70mm



11 7/8 x 11 7/8 x 2 3/4"
300 x 300 x 70mm



7 7/8 x 23 5/8 x 2 3/4"
200 x 600 x 70mm

| | THICKNESS | 2 3/4" - 7cm | | | | | | 3 1/8" - 8cm | 2" - 5cm | |
|---------------|---------------------|---------------------|---------|---------|----------|---------|--------|---------------------|-----------------|----------|
| | EDGE DETAIL* | Rounded | | | | | | Micro | Rounded | Rounded |
| FINISH | SIZE | 4 x 8" | 4 x 12" | 6 x 12" | 12 x 12" | 8 x 24" | 8" Hex | Artline | 5 x 10" | 24 x 24" |

UMBRIANO™

| | | | | | | | | | | |
|--|-------------------------|---|---|--|---|---|---|---|--|---|
| | French Grey | • | • | | • | | • | | | |
| | Winter Marvel (SR 0.35) | • | • | | • | • | • | • | | • |
| | Summer Wheat (SR 0.42) | | • | | • | | | | | |

SERIES™

| | | | | | | | | | | |
|--|----------------------------|---|--|---|--|---|--|--|--|--|
| | Nordic Star | • | | • | | • | | | | |
| | Peppered Granite (SR 0.38) | • | | • | | | | | | |
| | Golden Tan (SR 0.40) | • | | • | | | | | | |

IL CAMPO®

| | | | | | | | | | | |
|--|---------------|---|--|--|--|--|--|---|--|--|
| | Granite Blend | • | | | | | | • | | |
|--|---------------|---|--|--|--|--|--|---|--|--|

Architectural Paver Collection



7⁷/₈ x 7⁷/₈ x 2³/₄"
200 x 200 x 70mm



Artline - See dimensions on page 6



4³/₄ x 9¹/₂ x 3¹/₈"
120 x 240 x 80mm



24 x 24 x 2"
606 x 606 x 50mm

| | THICKNESS | 2 3/4" - 7cm | | | | | | 3 1/8" - 8cm | 2" - 5cm | |
|--------|--------------|--------------|---------|---------|----------|---------|--------|--------------|---|----------|
| | EDGE DETAIL* | Rounded | | | | | | Micro | Rounded | Rounded |
| FINISH | SIZE | 4 x 8" | 4 x 12" | 6 x 12" | 12 x 12" | 8 x 24" | 8" Hex | Artline | 5 x 10"  | 24 x 24" |

SMOOTH PREMIER

| | | | | | | | | | | |
|--|--|---|---|--|--|---|---|---|---|---|
|  | Dark Charcoal | • | | | | | • | | | |
|  | Opal Blend (SR 0.35) | | | | | | | | | • |
|  | Granite Fusion/ Steel Mountain (SR 0.28) | • | • | | | • | • | • | • | |
|  | Tuscany (SR 0.39) | • | • | | | | • | | | |
|  | Chamois (SR 0.41) | | | | | | | | | • |

REVELA™

| | | | | | | | | | | |
|--|---------------|---|--|--|--|---|--|--|--|--|
|  | Dark Charcoal | • | | | | | | | | |
|  | Tuscany | • | | | | • | | | | |

*EDGE DETAIL



ROUND



MICRO BEVEL

Architectural Paver Collection

ARCANA™

| COLORS | Reflectance | Stock |
|---------|-------------|-------|
| Corvara | (SR 0.30) | ✓ |
| Avorio | (SR 0.56) | ✓ |
| Modena | (SR 0.46) | ✓ |
| Vivanto | (SR 0.18) | ✓ |

Single Units



11⁷/₈ x 23⁷/₈ x 2"
301 x 606 x 50mm



17⁷/₈ x 23⁷/₈ x 2"
453 x 606 x 50mm



23⁷/₈ x 23⁷/₈ x 2"
606 x 606 x 50mm

MATTONI™

| COLORS | Stock |
|---------------|-------|
| Dark Charcoal | ✓ |
| Sable Blend | ✓ |
| Granite | ✓ |
| Cocoa Brown | ✓ |

Single Unit



2³/₈ x 9¹/₂ x 2³/₄"
60 x 240 x 70mm

Architectural Wall Collection

PISAXL® /CONCORD XL

| COLORS | Stock |
|--------------|-------|
| Granite | ✓ |
| Almond Grove | ✓ |
| Sierra | ✓ |

Single Unit



XL UNIT
11⁷/₈ x 15³/₄ x 5⁷/₈"
300 x 400 x 150mm

UNIVERSAL COPING

| COLORS | Stock |
|---------------|-------|
| Light Grey | ✓ |
| Dark Charcoal | ✓ |

Single Unit



14 x 19 x 2³/₄"
355 x 482 x 70mm

Architectural Wall Collection

LINEO® DIMENSIONAL WALL

| COLORS | Stock |
|--------------|-------|
| Granite | ✓ |
| Almond Grove | ✓ |
| Sierra | ✓ |

| | | | | | | |
|----------------------|---|---|---|--|-------------|---|
| 4 Unit Random Bundle |  |  |  |  | Single Unit |  |
| | UNIT 1 8 x 12 x 4" 200 x 300 x 100mm | UNIT 2 8 x 16 x 4" 200 x 400 x 100mm | UNIT 3 8 x 20 x 4" 200 x 500 x 100mm | UNIT 4 8 x 24 x 4" 200 x 600 x 100mm | | CORNER / PILLAR UNIT 8 x 16 x 4" 200 x 400 x 100mm |

RANDOM BUNDLE (all units sold together)

U-CARA®

UMBRIANO FINISH



French Grey



Summer Wheat



Winter Marvel

PITCHED FINISH



Fossil



Granite / Steel Mountain

SMOOTH PREMIER FINISH



Opal Blend



Granite / Steel Mountain

| | | | | | | | | |
|---------------------|---|----------------------|---|---|---------------|--|---|---|
| Single Panel Bundle |  | 2 Unit Corner Bundle |  |  | Backer Blocks |  |  |  |
| | 6" STANDARD FASCIA PANEL 5 7/8 x 18 3/8 x 2 3/8" 150 x 466 x 60mm | | STANDARD FASCIA HALF PANEL 5 7/8 x 9 1/4 x 2 3/8" 150 x 233 x 60mm | CLOSED-END FASCIA PANEL 5 7/8 x 20 7/8 x 2 3/8" 150 x 530 x 60mm | | SURETRACK STANDARD BACKER 7 1/2 x 5 7/8 x 5 7/8" 190 x 150 x 150mm | SURETRACK CORNER BACKER 6 7/8 x 5 7/8 x 11 5/8" 175 x 150 x 294mm | SURETRACK LARGE BACKER 7 1/2 x 5 7/8 x 11 5/8" 190 x 150 x 294mm |

CORNER BUNDLE (units sold together)

Cleaners



GATOR CLEAN XP OIL AND GREASE REMOVER

Use it on concrete, paver or stone. Do not use on asphalt (blacktop). Not recommended for synthetic oil stains.

- Biodegradable and phosphate-free
- Easily lifts & absorbs embedded oil stains
- No scrubbing, no rinsing, no mess
- Not recommended for synthetic oil stains



TECHNISEAL SR SLURRY REMOVER FOR PAVERS AND SLABS

This is the most effective product available for removing cement slurry and polymeric sand haze on concrete or clay pavers and slabs. 1 gallon of concentrated product cleans up to 600 sq.ft. Coverage will depend on surface condition and product dilution.

Packaging: 1 Gallon, Box of 4 x 1 gallon containers



GATOR EFFLORESCENCE CLEANER

Remove any efflorescence stains trapped in the concrete pavers & natural stone pores. It will make the pavers look more clean and vibrant. This efflorescence cleaning is a necessary step before a sealer is applied. The sealer will be able to get a deeper penetration into the now clean pores.

Packaging: 1 Gallon and 5 Gallon



TECHNISEAL ORGANIC STAIN REMOVER

Formulated to remove moss and mildew as well as tough organic stains such as dead leaves, blood, wine and non-greasy food stains on concrete pavers, slabs and walls, natural stone, etc; requires minimal scrubbing.

Packaging: 700g Container, Box of 6 Containers, 600 containers/skid

Sealers



GATOR SEAL SIGNATURE SERIES NATURAL LOOK

This sealer penetrates deep into the concrete pavers, walls, masonry and natural stones, therefore helps prevent the oil and dirt penetration, corrosion from de-icing salt, the effects from the UV rays and stains up to 10 years.

Packaging: 1 Gallon and 5 Gallon



GATOR SATIN LOOK SEALER

Made from acrylic-based polymers GATOR SATIN LOOK SEALER penetrates deep into the concrete pavers, therefore helps prevent the oil and dirt penetration, corrosion from de-icing salt and the effects from the UV rays. Specifically formulated to be used on unsealed surfaces only.

Packaging: 1 Gallon and 5 Gallon

Sealers continued



GATOR WET LOOK SEALER

Made from acrylic-based polymers GATOR WET LOOK SEALER penetrates deep into the concrete pavers, therefore helps prevent the oil and dirt penetration, corrosion from de-icing salt and the effects from the UV rays. Specifically formulated to be used on unsealed surfaces only.

Packaging: 1 Gallon and 5 Gallon



BACK TO BLACK SEALER

- Quickly revives and enhances faded, dark limestone.
- Provides stain & water-resistant surface
- 1 Liter covers up to 400 sqft with one coat depending on surface porosity.
- LIMITED STOCK AVAILABLE.
- Packaging: 1 quart; 3 quarts/case

Paver Edging



PERMA PAVER EDGING

- Designed to float and flex with the sub base and not work independently like standard edging and spikes
- Quick & easy to install, typically cutting edging install time down by 90%
- Stays under the soil/mulch grade - invisible edging
- Combats the freeze/thaw cycles in cold weather; won't deteriorate in moist/humid conditions
- Coverage per container: yields approximately 25-30 lineal feet of edging per bucket



GATOR XTREME EDGE

Gator Xtreme Edge is reinforced with the ultimate 3D micro-fiber mesh and polymer modified structural edge, which creates a strong and economical edging solution for any hardscape project. It can be used on any traditional, open-graded, permeable, Gator Base or overlay

Packaging: 50 lb bag / 56 bags per skid.

Note: Carefully read all instructions and safety information on product label prior to application. For additional safety information, see MSDS.

Adhesive



ALLIANCE XP GATOR BLOCK ADHESIVE

- Bonds permanently in 24 hours
- Material may be repositioned for up to 30 minutes
- Works in temperatures above 32°F
- 850 psi in 24 hrs (-1,000 psi in 7 days)

Packaging:

10 oz; 12/case; 90 cases/skid; 1,080 units/skid

28 oz; 12/case; 60 cases/skid; 720 units/skid

Sands

ROMEX ECOFINE SAND

Sustainable Paving Joint Mortar for Narrow Joints

- Designed for paver joints up to 1/8" (porcelain) to 2" (concrete pavers)
- Made from 98% natural, recycled or renewable raw materials
- Resin film free
- Weed resistant
- Ant resistant
- Highly water permeable
- Frost resistant
- Installation almost identical to regular paver joint sand, except for the application of water. Becomes very firm when set & locks between the paver joints

Colors: Beige, Grey, Anthracite

Coverage: 30 - 40 sq.ft./bucket for narrow joints, larger joints will require more sand



SABLE MARCO EV EVOLUTION SAND HIGH PERFORMANCE POLYMERIC SAND

- A specially formulated high performance mix of graded sand and binding agent to fill pavers joints
- Ideal for the installation of pavers or slabs as well as replacing existing joints on sidewalks, patios, sloped driveways or walkways
- Will remain stable and flexible and maintain its flexibility and durability in the most extreme weather conditions.
- Contains no pigment or dyes

Note: Extra care must be taken when using on

Courtstone, Copthorne, Richcliff and Town Hall.

Not recommended for Il Campo, Series or Umbriano.

Colors: Grey, Beige and Black

Packaging: 50 lb bag / 63 bags per skid.

Coverage: Approx. 100 sq.ft./ bag for narrow joints, larger joints will require more sand.



ALLIANCE GATOR NITRO SAND

- Ready to use permeable jointing material
- Can be installed in wet or dry weather
- Formulated for joints from 1/2" to 2"
- Ideal for concrete & wetcast pavers, Natural Stone & Porcelain Tile

Colors: Beige, Grey, and Black

Packaging: 40 lb bucket, 48 buckets/skid

Coverage: 50-75 Sq.Ft./bucket depending on joint width.



Sands (continued)

POLYBIND G2 COMPLETE SAND

NO DUST • HAZE FREE • NO BLOWER • ONE WATERING • RAIN SAFE IN 16 MINUTES

Designed for paver joints up to 2".

- Made with calibrated sand mixed with sophisticated intelligent polymers, which neutralizes haze and dust
- Recommended for a variety of uses including pool decks, patios, footpaths, driveways, parking spaces, pavements, etc

Colors: Nevada Tan & Oxford Grey.

Packaging: 50 lb/bag

Coverage: 65-85 sq.ft./bag for narrow joints, larger joints will require more sand



POLYBIND HP SAND

- Unique mixture of polymer binders and calibrated sand
- The installation of POLYBIND SAND is almost identical to using regular paver joint sand except for the application of water. Once POLYBIND SAND sets, it becomes very firm and locks between the paver joints while still retaining flexibility and providing a long lasting, durable jointing material
- Recommended for a variety of uses including pool decks, patios, footpaths, driveways, parking spaces, pavements etc

Colors: Oxford Grey and Nevada Tan.

Packaging: 50 lb bag / 56 bags per skid.

Coverage: 65-85 sq.ft./ bag for narrow joints, larger joints will require more sand.



POLYBIND G2 SAND

NO DUST • HAZE FREE • NO BLOWER • ONE WATERING • RAIN SAFE IN 16 MINUTES

Designed for paver joints up to 2".

- A unique mix of polymer binders and calibrated sand
- Installation almost identical to regular paver joint sand, except for the application of water. Becomes very firm when set & locks between the paver joints

Colors: Oxford Grey and Nevada Tan.

Packaging: 50 lb bag / 56 bags per skid.

Coverage: 65-85 sq.ft./ bag for narrow joints, larger joints will require more sand.



Sands (continued)

| PAVERS \ FEATURES | SAND RECOMMENDATIONS BY PRODUCT | |
|------------------------|---------------------------------|----------------|
| | Sands | Polymeric Sand |
| Artline™ | | ✓+ |
| Beacon Hill Flagstone™ | | ✓ |
| Beacon Hill Smooth | | ✓ |
| Bristol Valley™ | | ✓+ |
| Copthorne® | | ✓+ |
| Courtstone® | | ✓+ |
| Il Campo® | | N/R |
| Richcliff® | | ✓+ |
| Series™ | | N/R |
| Town Hall® | | ✓+ |
| Thornbury™ | | ✓ |
| Transition™ | | ✓ |
| Treo™ | | ✓ |
| Tribeca Cobble | | N/R |
| Umbriano® | | ✓+ |
| Westport™ | | ✓+ |
| Tumbled Pavers | | ✓ |
| Classic Pavers | | ✓ |

N/R - Not Recommended

✓ - Recommended

✓+ - Recommended with Extra Care
(contact your Territory Manager for more information)

IMPORTANT NOTICE

1. DO NOT USE Polymeric Jointing Sand on the following products: Series™
Il Campo®

If joint stabilization is required, use ordinary jointing sand and apply a stabilizing sealer. **Contact your local Unilock office for recommended sealants and application specifics.**

2. EXTRA CARE must be exercised when using Polymeric Sand on the following products:

Courtstone® Copthorne® Richcliff® Town Hall®
Tribeca Cobble™ Umbriano®

Polymeric Jointing Sand can be used on these products but the fine polymers and binders in Polymeric Jointing Sand have a natural tendency to adhere to the surface and therefore extra diligence must be taken to pre-clean the surface prior to "wetting the sand in" and squeegee off the surface post application. Failure to do so will result in a "whitish haze" on the surface that is difficult to remove.

3. IMPORTANT COMPACTION NOTICE: Always pre-compact the pavers WITHOUT SAND IN THE JOINTS. This will facilitate proper leveling. Polymeric sand can then be swept into the joints. Always use a compactor with a protective membrane attached to the bottom of the plate.

Polymeric Jointing Sand, cleaners and sealers, must always be applied by a trained and experienced professional. Contact your local Unilock office for training and the most up-to-date best practices.

NOTICE: Unilock does not accept any responsibility for damage to the surface caused by the improper application and use of polymeric sand, sealers or cleaners.

Paver Spacers

X & T SLAB SPACERS

• Unilock recommends using slab spacers when installing Arcana and Soreno.
• "T" spacers are needed for running bond patterns; "X" spacers are needed for stack bond patterns. Please contact your Territory Manager for more information



Packaging:

- 250 per bag
- X & T bagged separately
- X spacers 2" x 2" (RS-ACC237)
- T spacers 2" x 1" (RS-ACC236)

UNILOCK PERMEABLE SPACER **NEW**

RELIABLE, HAZE-FREE PERFORMANCE

Designed for paver joints up to 3/4".

- Create a permeable installation using non-permeable pavers
- Hollow, weather-proof polypropylene (PP) plastic cylindrical elements allow rainwater to flow through into the sub-base
- Rigid and durable, ideal for both vehicular and pedestrian loads





Specifications / Packaging:

- Color: Black
- Dimension: 37mm (h) x 29mm (w)
- Post diameter: 10mm w/6mm drain hole diameter
- Weight: 6g
- Packaging: Bulk

Edge Restraints

SNAPEDGE

- Only one part required for straight runs or curved installations
- Built-in connector fastens one piece to the next - convenient 96" size, makes them easy to transport
- Unique 'Snip and Flex' feature speeds installation of curves and corners without pre-planning
- The open design allows a root system to grow through SnapEdge, further reinforcing the installation.
- Engineered to provide a strong, easy-to-install edge restraint for concrete/clay pavers
- Nail hole bosses are full-length cylinders. Hammer blows will not fracture or force nail heads through edging

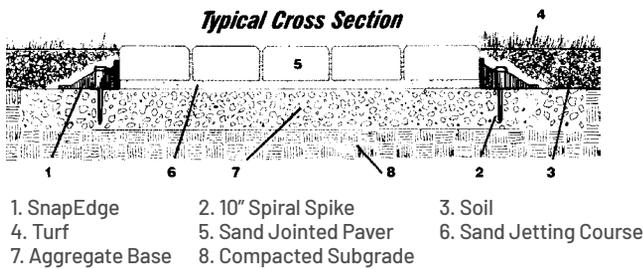

Also available in low profile




Unilock Drivegrid System™



UNILOCK DRIVEGRID™ SYSTEM

- 120' x 13' Roll, 1,572 Square Feet/Roll, 56 lb/Roll

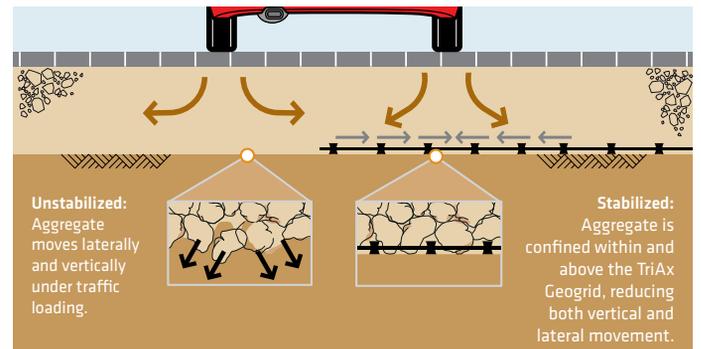

WHY DRIVEGRID SYSTEM™?

- ✓ Easy to install
- ✓ Reduces overall project cost
- ✓ Inexpensive
- ✓ Proven Tensar® TriAx® Technology




- 1 piece = 8 linear feet
- 1 bundle = 24 pieces
- 1 bundle = 24 pieces = 192 linear feet
- 1 pallet = 16 bundles = 3,072 linear feet



LANDSCAPE SPIKES
50lb case

Landscape Fabric & Grid System



GEOGRID AND FABRICS

Strata 150 - 22.22 sq. yds/roll
 Strata 200 - 200 sq. yds/roll
 Filter Fabric - 6.25' x 360'; 250 sq yds/roll



GATOR GRID 30-30

- A biaxial geogrid, provides strength, longevity, excellent stress transfer and prevents failure to the internal structure of landing areas, retaining walls and steep slopes
- Has a high molecular weight as well as high-tenacity polyester yards which are woven in tension and finished with a PVC coating
- Packaging & Unilock SKU (Minimum Case Purchase = MCP):
 FAB070 - 4' x 50/12 rolls/case, 60 rolls/skid * MCP *
 FAB071 SPECIAL ORDER - 6' x 50' - 40 rolls/skid
 FAB072 - 6' x 150'/25 rolls/skid



GATOR FABRIC NON-WOVEN 4.4

- A needle punched non-woven geotextile made of polypropylene fiber, ideal for drainage, filtration and will allow water flow of 135 gallons per minutes per square foot (613 L/min/sq. m.) in paver or retaining wall applications
- Its filament fibers are used for soil separation and drainage and combine high durability along with excellent physical and hydraulic properties
- Non-biodegradable and resistant to most soil chemicals
- Packaging & Unilock SKU (Minimum Case Purchase = MCP):
 FAB043 - 3' x 100' - 6 rolls/case, 24 rolls/skid SPECIAL ORDER * MCP *
 FAB044 - 4' x 100' - 6 rolls/case, 36 rolls/skid * MCP *
 FAB046 - 6' x 100' - 30 rolls/skid * MCP *
 FAB047 - 6' x 300' - 16 rolls/skid * MCP *


Stainless Steel Fireplace Insert

STAINLESS STEEL FIREPLACE INSERT

36" Unit - RS-FIR033; Order with RS-FIR041 (18" Flue Pipe), RS-FIR042 (36" Flue Pipe) & RS-FIR036-1 (Termination Cap)

42" Unit - FS-FIR034; (SPECIAL ORDER); Order with RS-FIR042 (36" Flue Pipe) & RS-FIR036-1 (Termination Cap)

- Outdoor, Wood-burning Fireplace.
- Insert comes with refractory panels, mesh spark screen and solid steel log grate.
- 254 lbs./Full Kit

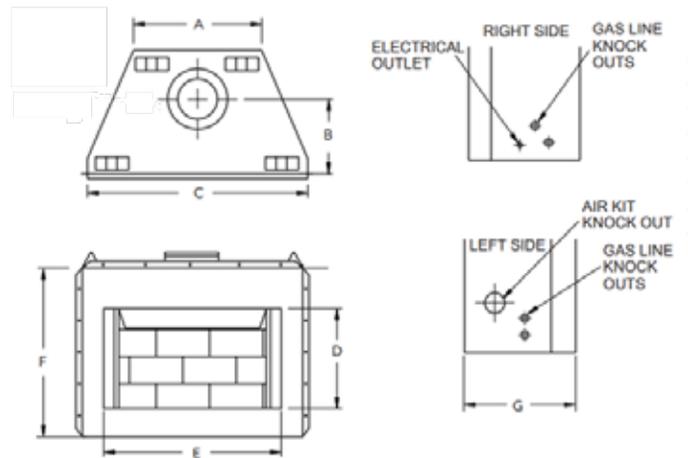

| | 36 | 42 |
|---|---------|---------|
| A | 29" | 36" |
| B | 11-3/4" | 11-3/4" |
| C | 41" | 48" |
| D | 21" | 24" |
| E | 35" | 42" |
| F | 37" | 41" |
| G | 21" | 22-1/2" |

PaverSaver Uni Mat



PAVERSAVER UNI MAT

Universal Design - for use on most compactors

The PaverSaver Uni Mat is made out of a specially formulated urethane rubber. Material soft enough to protect the paver surface yet hard enough to minimally affect travel speed. The universal sizing fits most compactor plates and easily attaches and detaches from the compactor.

Tools & Accessories



INSTALL UP TO 700 SQ. FT. PER HOUR!

- Access tight or narrow areas
- Eliminate the need for a forklift on site
- Reduce labor costs
- Reduce shoulder, hand & knee pain and injury
- Improve your bottom line

Contact your local rep for details



MODEL L



MODEL PM



MODEL
MINI




ALL TERRAIN
PALLET MOVER



STANDARD AND CUSTOM HEADS AVAILABLE FOR LIFTING ALMOST ANYTHING!

- Small or Large
- Smooth or Rough
- Textured Designs
- Exposed Aggregate
- Patterned
- Natural Stone



BEDDING MATERIALS CHART (APPROXIMATE IMPERIAL TONS)

| Bedding Course | | | | | | | | | | | | |
|----------------|-----|------|-------|------|------|------|------|------|-------|------|------|------|
| Square Feet | 1" | 2" | 3" | 4" | 5" | 6" | 7" | 8" | 9" | 10" | 11" | 12" |
| 50 | 0.3 | 0.5 | 0.8 | 1.0 | 1.3 | 1.5 | 1.8 | 2.0 | 2.3 | 2.5 | 2.8 | 3.0 |
| 100 | 0.5 | 1.0 | 1.5 | 2.0 | 2.5 | 3.0 | 3.5 | 4.0 | 4.5 | 5.0 | 5.5 | 6.0 |
| 150 | 0.8 | 1.5 | 2.3 | 3.0 | 3.8 | 4.5 | 5.3 | 6.0 | 6.8 | 7.5 | 8.3 | 9.0 |
| 200 | 1.0 | 2.0 | 3.0 | 4.0 | 5.0 | 6.0 | 7.0 | 8.0 | 9.0 | 10.0 | 11.0 | 12.0 |
| 250 | 1.3 | 2.5 | 3.8 | 5.0 | 6.3 | 7.5 | 8.8 | 10.0 | 11.36 | 12.5 | 13.8 | 15.0 |
| 300 | 1.5 | 3.0 | 4.5 | 6.0 | 7.5 | 9.0 | 10.5 | 12.0 | 13.5 | 15.0 | 16.5 | 18.0 |
| 350 | 1.8 | 3.5 | 5.3 | 7.0 | 8.8 | 10.5 | 12.3 | 14.0 | 15.8 | 17.5 | 19.3 | 21.0 |
| 400 | 2.0 | 4.0 | 6.0 | 8.0 | 10.0 | 12.0 | 14.0 | 16.0 | 18.0 | 20.2 | 22.0 | 24.0 |
| 450 | 2.3 | 4.5 | 6.8 | 9.8 | 11.3 | 13.5 | 15.8 | 18.0 | 20.3 | 22.5 | 24.8 | 27.0 |
| 500 | 2.5 | 5.0 | 7.5 | 10.0 | 12.5 | 15.0 | 17.5 | 20.0 | 22.5 | 25.0 | 27.5 | 30.0 |
| 550 | 2.8 | 5.5 | 8.3 | 11.0 | 13.8 | 16.5 | 19.3 | 22.0 | 24.8 | 27.5 | 30.3 | 33.0 |
| 600 | 3.0 | 6.0 | 9.0 | 12.0 | 15.0 | 18.0 | 21.0 | 24.0 | 27.0 | 30.0 | 33.0 | 36.0 |
| 650 | 3.3 | 6.5 | 9.8 | 13.0 | 16.3 | 19.5 | 22.8 | 26.0 | 29.3 | 32.5 | 35.8 | 39.0 |
| 700 | 3.5 | 7.0 | 10.5 | 14.0 | 17.5 | 21.0 | 24.5 | 28.0 | 31.5 | 35.0 | 38.5 | 42.0 |
| 750 | 3.8 | 7.5 | 11.36 | 15.0 | 18.8 | 22.5 | 26.3 | 30.0 | 33.8 | 37.5 | 41.3 | 45.0 |
| 800 | 4.0 | 8.0 | 12.0 | 16.0 | 20.0 | 24.0 | 28.0 | 32.0 | 36.0 | 40.0 | 44.0 | 48.0 |
| 850 | 4.3 | 8.5 | 12.8 | 17.0 | 21.3 | 25.5 | 29.8 | 34.0 | 38.3 | 42.5 | 46.8 | 51.0 |
| 900 | 4.5 | 9.0 | 13.5 | 18.0 | 22.5 | 27.0 | 31.5 | 36.0 | 40.5 | 45.0 | 49.5 | 54.0 |
| 950 | 4.8 | 9.5 | 14.3 | 19.0 | 23.8 | 28.5 | 33.3 | 38.0 | 42.8 | 47.5 | 52.3 | 57.0 |
| 1000 | 5.0 | 10.0 | 15.0 | 20.0 | 25.0 | 30.0 | 35.0 | 40.0 | 45.0 | 50.0 | 55.0 | 60.0 |

BASE DEPTH CHARTS (CUBIC YARDS)

| Bedding Course | | | | | | | | | | | | |
|----------------|-----|-----|-----|------|------|------|------|------|------|------|------|------|
| Square Feet | 1" | 2" | 3" | 4" | 5" | 6" | 7" | 8" | 9" | 10" | 11" | 12" |
| 50 | 0.2 | 0.3 | 0.5 | 0.6 | 0.8 | 0.9 | 1.1 | 1.2 | 1.4 | 1.5 | 1.7 | 1.9 |
| 100 | 0.3 | 0.6 | 0.9 | 1.2 | 1.5 | 1.9 | 2.2 | 2.5 | 2.8 | 3.1 | 3.4 | 3.7 |
| 150 | 0.5 | 0.9 | 1.4 | 1.9 | 2.3 | 2.8 | 3.2 | 3.7 | 4.2 | 4.6 | 5.1 | 5.6 |
| 200 | 0.6 | 1.2 | 1.9 | 2.5 | 3.1 | 3.7 | 4.3 | 4.9 | 5.6 | 6.2 | 6.8 | 7.4 |
| 250 | 0.8 | 1.5 | 2.3 | 3.1 | 3.9 | 4.6 | 5.4 | 6.2 | 6.9 | 7.7 | 8.5 | 9.3 |
| 300 | 0.9 | 1.9 | 2.8 | 3.7 | 4.6 | 5.6 | 6.5 | 7.4 | 8.3 | 9.3 | 10.2 | 11.1 |
| 350 | 1.1 | 2.2 | 3.2 | 4.3 | 5.4 | 6.5 | 7.6 | 8.6 | 9.7 | 10.8 | 11.9 | 13.0 |
| 400 | 1.2 | 2.5 | 3.7 | 4.9 | 6.2 | 7.4 | 8.6 | 9.9 | 11.1 | 12.3 | 13.6 | 14.8 |
| 450 | 1.4 | 2.8 | 4.2 | 5.6 | 6.9 | 8.3 | 9.7 | 11.1 | 12.5 | 13.9 | 15.3 | 16.7 |
| 500 | 1.5 | 3.1 | 4.6 | 6.2 | 7.7 | 9.3 | 10.8 | 12.3 | 13.9 | 15.4 | 17.0 | 18.5 |
| 550 | 1.7 | 3.4 | 5.1 | 6.8 | 8.5 | 10.2 | 11.9 | 13.6 | 15.3 | 17.0 | 18.7 | 20.4 |
| 600 | 1.9 | 3.7 | 5.6 | 7.4 | 9.3 | 11.1 | 13.0 | 14.8 | 16.7 | 18.5 | 20.4 | 22.2 |
| 650 | 2.0 | 4.0 | 6.0 | 8.0 | 10.0 | 12.0 | 14.0 | 16.0 | 18.1 | 20.1 | 22.1 | 24.1 |
| 700 | 2.2 | 4.3 | 6.5 | 8.6 | 10.8 | 13.0 | 15.1 | 17.3 | 19.4 | 21.6 | 23.8 | 25.9 |
| 750 | 2.3 | 4.6 | 6.9 | 9.3 | 11.6 | 13.9 | 16.2 | 18.5 | 20.8 | 23.1 | 25.5 | 27.8 |
| 800 | 2.5 | 4.9 | 7.4 | 9.9 | 12.3 | 14.8 | 17.3 | 19.8 | 22.2 | 24.7 | 27.2 | 29.6 |
| 850 | 2.6 | 5.2 | 7.9 | 10.5 | 13.1 | 15.7 | 18.4 | 21.0 | 23.6 | 26.2 | 28.9 | 31.5 |
| 900 | 2.8 | 5.6 | 8.3 | 11.1 | 13.9 | 16.7 | 19.4 | 22.2 | 25.0 | 27.8 | 30.6 | 33.3 |
| 950 | 2.9 | 5.9 | 8.8 | 11.7 | 14.7 | 17.6 | 20.5 | 23.5 | 26.4 | 29.3 | 32.3 | 35.2 |
| 1000 | 3.1 | 6.2 | 9.3 | 12.3 | 15.4 | 18.5 | 21.6 | 24.7 | 27.8 | 30.9 | 34.0 | 37.0 |

Actual volume may vary due to type of materials, moisture content, and compaction. Calculation charts and formulas are provided as a service by Unilock for estimating material requirements. Unilock will not be held responsible in any way for resulting product overage or shortage.

Base Thickness Chart (General)

| APPLICATION | GRAVEL BASE | BEDDING COURSE | BACKFILL WIDTH (WALLS ONLY) |
|----------------------------------|------------------------|------------------------|-----------------------------|
| PATIOS, WALKWAYS, POOL DECKS | 4" - 6" (10cm-15cm) | 1" (2.5cm) | |
| DRIVEWAYS | 8" - 12" (20cm - 30cm) | 1" (2.5cm) | |
| STEPS, PLANTERS, RAISED PATIO | 6" (15cm) | 0 - 1/8" (0cm - 0.3cm) | 8" - 12" (20cm - 30cm) |
| RETAINING WALLS UNDER 18" (45cm) | 6" (15cm) | 0 - 1/8" (0cm - 0.3cm) | 12" (30cm) |
| RETAINING WALLS OVER 18" (45cm) | 6" (15cm) | 0 - 1/8" (0cm - 0.3cm) | 16" (50cm) |

Soil condition - In areas with poor soil conditions, (eg., heavy clay, disturbed soils) increase the depth of the base to provide more stability. Where poor soil conditions exist it may be advisable to contact an engineer when constructing a retaining wall in excess of 24" in height.

| AREA = (LENGTH) X (WIDTH) | METRIC EQUIVALENTS |
|--|--|
| Area of a Circle = 3.14 x (Radius) x (Radius) | 1 inch = 2.5400 centimeters 1 centimeter = 0.3937 inch |
| Area of a Half Circle = 1.57 x (Radius) x (Radius) | 1 foot = 0.3048 meter 1 meter = 39.3701 inches |
| Area of a Quarter Circle = .78 x (Radius) x (Radius) | 1 yard = 0.9144 meter |
| Area of a Triangle = (1/2 Base) x (Height) | 1 sq. foot = 929.030 sq. centimeters |
| Perimeter of a Circle = 6.28 x (Radius) | 1 sq. meter = 1.196 sq. yards |
| Perimeter of a Half Circle = 3.14 x (Radius) | 27 cu feet = 1 cu. yard |
| Perimeter of a Quarter Circle = 1.57 x (Radius) | |

IMPORTANT NOTES

UNILOCK PAVER PATTERNS

This Product Data Guide contains an extensive reference to patterns and designs. The purpose of these pattern swatches is to help the designer plan unique and exceptional designs. The percentages of products shown are based on the pattern and not on bundle configurations. In fact, there may be situations in which a pattern has been created with one particular size of stone, but that stone only comes packaged with two other sizes. This means that the designer will have to plan how the other components are used in the overall plan. This is usually accomplished by adding a border or an accent. As a result, overages or shortages may occur in certain patterns. The designer and/or installer of Unilock products accepts all responsibility for design and all associated costs incurred as a result of applying any of Unilock's suggested design patterns in a project. Please plan your project and review your order carefully prior to ordering.

PRODUCT HANDLING WARNING

Bundle Straps Under Tension - Use extreme caution when removing or handling straps. Always wear gloves, goggles, safety footwear, and protective clothing when removing or handling straps. Failure to do so may result in serious bodily injury or loss of sight.

Cut all concrete products only in well ventilated areas. Inhalation of dust is a serious health risk. A "NIOSH" (US) or a "CSA" (CDN) approved respirator, safety goggles, hearing protectors, and gloves must be worn at all times. Always "wet-cut" or "wet grind" concrete products to minimize dust.

Do not stack bundled concrete products higher than 2 bundles high. Contents of the bundle may be unstable and subject to topple when stacked. Always use extreme caution and appropriate equipment when transporting or storing bundled concrete products. Failure to do so may result in serious bodily injury or death. Always obey gross vehicle weight (GVW) loading limitations and regulations.

Hazard Rating: Fire 0, Health 1, Reactivity 0. See MSDS Concrete Masonry (Pavers). Contact Unilock for complete sheet or view safety information at Unilock.com.

Unilock assumes no liability or responsibility for loss or damage, resulting from the improper use or handling of our products, or from failure to follow instructions, warnings, and/or advisories on the product label, and on the MSDS sheet.

TRADEMARK & LEGAL INFORMATION

Unilock Ltd. and Hengestone Holdings, Inc. are the owners or authorized users of all trademarks used in this publication unless otherwise specified. Umbriano® are trademarks of Metten Stein + Design GmbH & Co KG used under license by Unilock®. Measurements throughout this portfolio are nominal. Not all products shown are available at all Unilock locations. Log on to Unilock.com for availability. Colors shown in this catalog should be used only as a guide. Colors should always be chosen from actual samples. Contact your local Unilock representative for color availability in your area.



QUALITY COMMITMENT

Unilock was the first concrete paver manufacturer in North America to offer a Lifetime Guarantee, and since then we have continued to stand behind it to ensure customers are completely satisfied with our products. With almost 2 billion stones in the ground, that's quite the commitment!

Our products are better and stronger than other brands. In fact, our internal standards of manufacturing in the USA and Canada far exceed industry standards set by ASTM (American Society for Testing and Materials) and CSA (Canadian Standards Association) and other European organizations.



LIFETIME GUARANTEE - RESIDENTIAL

Our Transferable Lifetime Guarantee warranties the structural integrity of Unilock concrete paving stones and retaining wall units when used in residential applications. It covers any structural failure or deterioration of the concrete unit resulting from normal use or from the reasonable application of sodium chloride (common rock salt used for de-icing). StoneMark™ products have the same warranties as Unilock paving stones and retaining walls, but cannot be warranted against damage resulting from de-icing products.

Any materials installed and maintained to our guidelines, and subject to normal wear, that prove defective, will be replaced without cost. Proof of purchase is required. Customers are encouraged to submit receipts to us as soon as their project is complete, using the Unilock Warranty Registration Form on our website (Unilock.com).

Purchasers need to ensure that the product they purchase is appropriate for their intended application; for example, only certain thicknesses of products are appropriate for driveways. Color matching of the replacement product and/or lost time cannot be guaranteed and labor costs related to installing replacement product is not included. Unilock reserves the right to seek a professional diagnosis and opinion to determine the exact cause of the product failure. If the failure falls within our warranty parameters, Unilock will replace the defective product.

EXCLUSIONS - Unfortunately, some things are beyond the control of Unilock, and are therefore not covered by this warranty. These include: naturally occurring efflorescence, hazing from polymeric jointing sand, scratching and chipping resulting from snow removal or construction equipment, damage caused by natural or un-natural disasters, or negligence by anyone other than Unilock. While EasyClean helps to increase a paver's resistance to staining from various substances, it does not make our products stain-proof nor does it resist every kind of stain. The Unilock warranty also does not cover

deterioration or damage as a result of poor design or poor installation practices that are contrary to specifications as laid out by ICPI (Interlocking Concrete Pavement Institute) and the NCMA (National Concrete Masonry Association). For more information please visit www.icpi.org and www.ncma.org. Additionally, please refer to the Maintenance, Color and Installation Advisories.

MAINTENANCE ADVISORY

1. Cleaning and Sealing

As with anything that is outdoors, Unilock products are subject to harsh weather, dust, acid rain, leaf stains, water stains and general wear from foot or vehicular traffic. Therefore, periodic cleaning using environmentally safe detergents designed for cleaning concrete is recommended to maintain a bright, fresh appearance. To make subsequent cleaning easier and more effective, a concrete sealer can be applied to new or cleaned products to help prevent the penetration of substances that can cause stains.

There are many types of concrete cleaners and sealers on the market. Always read the instructions carefully before using the product to make sure that it will function as expected. Testing first, in a small unobtrusive area, is always a good idea to ensure the results are acceptable. Consult your local hardscape dealer to find the products best suited for your paver or wall installation.



Visit Unilock.com to register for your Transferable Lifetime Guarantee.

2. Winter Maintenance

Snow removal by way of metal blades on plows or shovels will scratch and chip the surface of pavers, causing permanent damage. To mitigate this risk, metal snow clearing blades must always have a polyurethane or rubber cutting edge attached when plowing pavers.

De-icing Salts - The use of de-icing products on paver surfaces is important for safety and to help mitigate snow accumulation. Most de-icing products will have some effect on concrete, even if the product label indicates that it is safe on concrete. If you must use a de-icing product, we recommend that you use Sodium Chloride (ordinary rock salt) or Calcium Chloride (for colder climates). Always apply sparingly. The use of de-icing products on StoneMark, wet-cast pavers, slabs or coping may damage the product and therefore is not recommended. Whenever possible use a coarse sand as an anti-slip measure instead of de-icing chemicals.

COLOR ADVISORY

1. Selection

Due to the inherently variable nature of printed materials and digital monitors, Unilock cannot guarantee that products will match the color of printed or online images. Therefore, when making final product selections, decisions should be made based on actual stones which are readily available from Unilock, Authorized Contractors or Authorized Dealers. Most Unilock products are not comprised of a single color, but rather contain blended colors for a more natural appearance. This means that there will be significant color variance from stone to stone, so purchasers should view multiple units together to get a more accurate impression of the overall color. *Note:* Unilock Natural Stone variations are outside the control of Unilock. Purchasers of natural stone must be willing to accept this inherent variability.

2. Pre-installation checking

Always check the label to ensure that the Unilock product delivered to your project is the product and color ordered. If there is a discrepancy, or if the product inside the packaging doesn't appear to be correct, contact your hardscape dealer before installing any pavers or wall units. If the product is installed, it indicates your acceptance of the products as delivered.

3. Blending

If the project requires more than one bundle of product it's always a good idea to draw product from several bundles when installing, as this ensures that any variation between bundles will be seamlessly integrated in the project. When bundles are from different production runs, random selection from multiple bundles is even more important.

4. Efflorescence

Efflorescence is a naturally occurring process that may appear as a white or light grey powder on the surface of concrete, clay or natural stone. It is temporary, and will disappear over time. However, if it is bothersome, an efflorescence cleaner can be used to remove it. There is no way to predict or prevent efflorescence. Because it does not compromise the structural integrity of the product, it is not covered by Unilock product warranties.

INSTALLATION ADVISORY

1. Construction Residue

While a certain amount of dirt on pavers and walls is inevitable during the construction phase, installers are strongly encouraged to clean as they go as construction residue can embed in the surface and become difficult to remove. The slurry produced during wet-saw cutting is particularly stubborn to clean if allowed to dry on the surface of pavers. Unilock warranties do not cover stains caused by a failure to remove construction residue.

2. Polymeric Haze

Surface hazing caused by polymeric jointing sand is not the responsibility of Unilock. Polymeric jointing sand should only be installed by an experienced and knowledgeable contractor. Any sand that is left on the surface prior to activation will result in a haze that is very difficult and time-consuming to remove. Only the highest quality, brand name polymeric sand that is guaranteed by the manufacturer should be used.

3. Compaction Damage

Both smooth and textured paver surfaces can be scratched by compaction equipment used to 'flatten' a new paver installation. Therefore, metal plate compactors must be fitted with a polyethylene mat to protect the paver surface from becoming scratched, or a superior option is to use a rubber-roller compactor instead. Damage to product surfaces caused by failure to follow these instructions is not covered by Unilock product warranties.

FIRE PIT WARNING

Wood-burning fire pits must be lined with a proper metal insert or refractory (fire-rated) brick to protect the concrete components from extreme exposure to heat. Extreme heat on a concrete surface may affect the structural integrity of the concrete and can be dangerous. The floor of the fire pit should always be constructed using refractory brick or a sand bed. For your safety, always use a spark screen over the fire.

NEW YORK PRODUCT DIRECTORY

UNIT PAVERS

| Product | Page | Finish | Pedestrian | Residential Vehicular | Commercial Vehicular | Environmental | For Borders & Accents |
|------------------------|-------|--------|------------|-----------------------|----------------------|---------------|-----------------------|
| ADA Paver | 04 | S | ✓ | ✓ | ✓ | | |
| Arcana™ | 05 | S | ✓ | | | | |
| Artline™ Smooth | 06 | SM | ✓ | ✓ | | | |
| Artline™ Umbriano | 07 | SM | ✓ | ✓ | | | |
| Beacon Hill™ Flagstone | 08-09 | F | ✓ | 80mm | | | |
| Beacon Hill™ Smooth | 10-11 | SM | ✓ | | | | |
| Bristol Valley® | 12 | F | ✓ | | | | |
| Brussels Brock® | 13 | W | ✓ | ✓ | | | ✓ |
| Copthorne® | 14 | T | ✓ | ✓ | | | ✓ |
| Courtstone® | 15 | C | ✓ | ✓ | | | ✓ |
| Dura-Mat™ | 16 | S | | | ✓ | ✓ | |
| Eco-Line® | 17 | CU | ✓ | ✓ | ✓ | ✓ | |
| Eco-Optiloc™ | 18 | CU | ✓ | ✓ | ✓ | ✓ | |
| Eco-Priora™ | 19 | CU | ✓ | ✓ | ✓ | ✓ | |
| Eco-Promenade™ | 20 | SM | ✓ | ✓ | ✓ | ✓ | |
| Eco-Stone™ | 21 | CU | ✓ | ✓ | ✓ | ✓ | ✓ |
| Granito™ | 22 | SM | ✓ | ✓ | | | |
| Hex™ | 22 | SM | ✓ | ✓ | 80mm | 80mm | |
| Holland Premier® | 24 | SM | ✓ | ✓ | | | ✓ |
| Il Campo® | 25 | B | ✓ | ✓ | ✓ | | ✓ |
| Mattoni™ | 26 | T | ✓ | ✓ | | | ✓ |
| Natural Stone | 27-32 | SM | ✓ | | | | |
| Nordic Cobble™ | 33 | WS | ✓ | ✓ | ✓ | | ✓ |
| Optiloc™ | 34 | CU | ✓ | ✓ | ✓ | | |
| Porcelain | 35 | SM | ✓ | | | | |
| Promenade™ | 36-37 | CU | ✓ | ✓ | ✓ | | ✓ |
| Promenade Ecoterra™ | 38 | S | ✓ | ✓ | | | ✓ |
| Revela™ | 39 | S | ✓ | ✓ | | | ✓ |
| Richcliff® | 41 | F | ✓ | ✓ | | | ✓ |
| Series™ | 42 | WS | ✓ | ✓ | ✓ | | ✓ |
| Skyline™ | 43 | S | ✓ | | | | |
| Soreno™ | 44 | SM | ✓ | | | | |
| Thornbury™ Smooth | 45 | SM | ✓ | ✓ | ✓ | ✓ | |
| Town Hall® | 46 | T | ✓ | ✓ | ✓ | ✓ | ✓ |
| Transition™ | 47 | F | ✓ | ✓ | | | ✓ |
| Treo® Premier | 48 | F | ✓ | ✓ | | | ✓ |
| Treo® Smooth | 49 | S | ✓ | ✓ | | ✓ | ✓ |
| Tribeca Cobble™ | 50 | W/C | ✓ | ✓ | | ✓ | ✓ |
| Turfstone™ | 51 | S | ✓ | ✓ | ✓ | ✓ | |
| Umbriano™ | 52-53 | SZ | ✓ | 70mm | 80mm | | ✓ |
| Urban™ | 54 | S | ✓ | | | | |
| Westport™ | 55 | F | ✓ | ✓ | | | ✓ |

RETAINING WALLS

| Product | Page | Finish | Gardens | Retaining Walls | Steps | Seatwalls | Pillars |
|------------------------------|-------|---------|---------|-----------------|-------|-----------|---------|
| Brussels Dimensional System™ | 56 | W | ✓ | | ✓ | ✓ | ✓ |
| Concord Wall™ | 57 | SP | ✓ | ✓ | ✓ | | ✓ |
| Concord Wall Smooth™ | 58 | SM | ✓ | ✓ | ✓ | | ✓ |
| DuraHold® | 59-61 | S | | ✓ | | | |
| Estate Wall™ | 62-66 | SP/W | ✓ | | ✓ | ✓ | ✓ |
| Lineo™ Dimensional Stone | 67-68 | SZ | ✓ | | ✓ | ✓ | ✓ |
| PisaEdge | 69 | SM | ✓ | ✓ | ✓ | ✓ | ✓ |
| Rivercrest® Wall | 70 | S | ✓ | ✓ | ✓ | ✓ | ✓ |
| SienaEdge® | 71 | SM | ✓ | ✓ | ✓ | ✓ | |
| SienaStone® | 72 | SP | | ✓ | ✓ | | |
| U-Cara® | 73 | Various | ✓ | ✓ | ✓ | ✓ | ✓ |

Finishes: B=Brushed; C=Cobblestone; CU=Custom; D=Dimpled; DW=Dimpled and Weathered; F=Flagstone; S=Standard; SM=Smooth; SZ=Smooth Zero Bevel; SP=Split; SP/W=Split and Weathered; T=Timeworn; W=Weathered; WS=Washed. This application chart should only be used as a guide. Site conditions, base materials, pattern and frequency of use may vary the performance of various types and styles of products.

ADD 3D LANDSCAPE DESIGN TO YOUR TOOLBOX



UVISION ALLOWS YOU TO VISUALLY COMMUNICATE YOUR DESIGN IDEAS TO YOUR CLIENT IN BOTH 2D PLAN VIEW AND 3D PERSPECTIVE VIEW

Whether you're coming from the hand-drawn world, or a 2D AutoCAD background, the biggest impact you'll see from adopting this new 3D design software is in how well the client will understand the project you are selling. **Uvision 3D Landscape Creator is an easy-to-use software tool that helps bring your designs ideas to life.**



SCAN THE QR CODE FOR MORE INFORMATION OR TO DOWNLOAD A FREE 30-DAY TRIAL OF UVISION 3D LANDSCAPE CREATOR.





TRANSFORMING HARDSCAPES

UNILOCK.COM | 1-800-UNILOCK

Let's **BUILD YOUR BUSINESS TOGETHER.**

**CONTACT 1-800-UNILOCK OR VISIT UNILOCK.COM TO
CONNECT WITH YOUR LOCAL TERRITORY MANAGER**

BOSTON
(508) 278-4536

CHICAGO
(630) 892-9191

MILWAUKEE
(262) 742-3890

KANSAS
(913) 417-7985

MICHIGAN
(248) 437-7037

NEW YORK
(845) 278-6700

MID-ATLANTIC
(202) 798-2060

ONTARIO
(416) 646-9000

CINCINNATI/KY/TN
(513) 202-0219

**OHIO/WESTERN PA/
WNY&CNY**
(330) 927-4000

